

Best Pneumatics Vol. 14

Air Line Equipment

● Modular F.R.L. Unit

Air Filter + Regulator + Lubricator: AC10 to 60	P. 14-2-5
Filter Regulator + Lubricator: AC10A to 40A	P. 14-2-16
Air Filter + Regulator: AC10B to 60B	P. 14-2-18
Air Filter + Mist Separator + Regulator: AC20C to 40C	P. 14-2-20
Filter Regulator + Mist Separator: AC20D to 40D	P. 14-2-22
Attachment Specifications	P. 14-2-24
Accessory	P. 14-2-29
Made to Order Specifications	P. 14-2-31



Soft Start-up Valve: AV2000/3000/4000/5000	P. 14-3-1
Lube Unit: AU	P. 14-3-11
Large Flow Air Filter: AF800/900	P. 14-3-13

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

F.R.L. (Filter/Regulator/Lubricator)

Precautions 1



Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions on the products mentioned in this catalog, and refer to main text for more detailed precautions on every series.

Design

Warning

1. The standard bowl for the air filter, filter regulator, and lubricator, as well as the sight dome for the lubricator are made of polycarbonate. Do not use in an environment where they are exposed to or come in contact with organic solvents, chemicals, cutting oil, synthetic oil, alkali, and thread lock solutions.
2. Avoid applications where pressurized air is frequently introduced to and released from the standard bowl of an air filter, filter regulator, or lubricator. It may cause the bowl to be damaged. Use of a metal bowl is recommended for such applications.
3. Please consult with SMC if the intended application calls for absolutely zero leakage due to special atmospheric requirements, or if the use of a fluid other than air is required.
4. **Regulator and filter regulator**
Be sure to install a safety device to prevent damage or malfunction of the outlet side components when the output pressure exceeds the set pressure value.

Caution

1. Select a model that is suitable for the desired purity by referring to the SMC's Best Pneumatics catalog.
2. Components cannot be used for applications that are outside the range of specifications. Please consult with SMC when you anticipate using the component outside the range of its specifications (such as temperature and pressure).
3. **Mist separator and micro-mist separator**
Design the system so that the mist separator and micro-mist separator are installed where there is less pulsation. A pressure difference between internal and external pressure inside the element should be kept within 0.1 MPa, as exceeding this value can cause damage.
4. **Regulator and filter regulator**
Air consumption is 0.1 L/min (ANR) or less under standard specifications. Please consult with SMC, if this value is not allowable.
5. **F.R.L.**
 - 1) When using a 2-unit combination such as AC□0A, AC□0B, and AC□0D, secure the top and bottom of the bracket. For 3-unit, securing the bottom side of the bracket is recommended.
 - 2) The bracket position varies depending on the attachment (T-interface or pressure switch) mounting.
 - 3) The standard mounting position for bracket is OUT side of each component (AF, AR, AL, AW, AFM, and AKM). Refer to the table on page 14-2-30 for pitches and dimensions of the bracket when mounting the attachment.
 - 4) Brackets cannot be mounted on both sides of a T-interface or pressure switch.
 - 5) Please contact SMC if you wish to change the bracket mounting position.

Selection

Warning

1. The mineral grease used on internal sliding parts and seals may run down to outlet side components. Please consult with SMC if this is not desirable.
2. **Regulator and filter regulator**
 - 1) Residual pressure release (outlet pressure release) is not complete by releasing the inlet pressure. To release residual pressure, select a model with a back flow mechanism. Using a model without a back flow mechanism makes for inconsistent residual pressure release (i.e., residual pressure may or may not be released) depending upon the operating conditions.
 - 2) Please contact SMC if air will not be consumed in the system for a long period of time, or if the outlet side will be used with a sealed circuit and a balanced circuit, as this may cause the set pressure of the outlet side to fluctuate.
 - 3) Set the regulating pressure range for the outlet pressure of the regulator in a range that is 85% or less of the inlet pressure. If set to above 85%, the outlet pressure will be easily affected by fluctuations in the flow rate and inlet pressure, and become unstable.
 - 4) A safety margin is calculated into the maximum regulating pressure range appearing in the catalog's specification table. However, the outlet pressure may exceed the set pressure due to a delay in the valve's closing.
 - 5) Please contact SMC when a circuit requires the use of a regulator having relief sensitivity with high precision and setting accuracy.
3. **Lubricator**
 - 1) Please contact SMC when the lubricator is used in high frequency operations, such as in a press.
 - 2) Lubrication cannot be properly performed if the operating flow rate is too low. Select proper size lubricator by referring the minimum dripping flow rate provided in this catalog.
 - 3) Avoid the use of a lubricator that causes back flow as this may cause damage to internal parts.
 - 4) Use a check valve (Series AKM) to prevent the lubricant from back flowing when redirecting the piping on the inlet side.
4. **Float-type auto drain**
Use auto drain under the following conditions to avoid malfunction.
 - <N.O. type>
 - Operating compressor: 0.75 kW (100 L/min (ANR)) or more
When using 2 or more auto drains, multiply the above value by the number of auto drains to find the capacity of the compressors you will need.
For example, when using 2 auto drains, 1.5 kW (200 L/min (ANR)) of the compressor capacity is required.
 - Operating pressure: 0.1 MPa or more
 - <N.C. type>
 - Operating pressure for AD17, AD27: 0.1 MPa or more
 - Operating pressure for AD37, AD47: 0.15 MPa or more

F.R.L. (Filter/Regulator/Lubricator)

Precautions 2



Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions on the products mentioned in this catalog, and refer to main text for more detailed precautions on every series.

Mounting

⚠ Caution

1. To avoid reversed connections of the air inlet/outlet, make connections after confirming the "IN/OUT" mark or arrows that indicate the direction of air flow. Reversed connections can cause malfunction.
2. Components with a bowl, e.g., air filter, filter regulator, lubricator, must be installed vertically with the bowl downward so that faulty drain discharge and dripping can be verified.
3. Ensure sufficient top, bottom, and front clearance for maintenance and operation of each component. Refer to the dimensions section for the minimum clearance for each component.
4. **Regulator and filter regulator**
Be sure to unlock the knob before adjusting the pressure and to lock it after the pressure is set.

Adjustment

⚠ Warning

1. Regulator and filter regulator

- 1) Set the regulator while verifying the displayed values of the inlet and outlet pressure gauges. Turning the knob excessively can cause damage to the internal parts.
- 2) Do not use a tool on the pressure regulator knob as this can cause damage. It must be operated manually.

⚠ Caution

1. Regulator and filter regulator

- 1) Be sure to check the inlet pressure before setting the outlet pressure.
- 2) The pressure gauge included with regulators for 0.02 to 0.2 MPa setting is for up to 0.2 MPa only. Do not apply pressure exceeding 0.2 MPa. It can damage the pressure gauge.
- 3) To set the pressure using the knob, turn the knob in the direction that increases pressure and lock the knob after the pressure is set. If this is done in the direction that decreases pressure, the pressure may drop from the original set pressure. Turning the knob clockwise increases the outlet pressure, and turning it counterclockwise reduces the pressure.

Piping


⚠ Warning

1. To screw piping materials into components, tighten with a recommended tightening torque while holding the female thread side. If the minimum tightening torque is not observed, this can cause a looseness and seal failure. On the other hand, excess tightening torque can cause damage to the threads. Furthermore, tightening without holding the female thread side can cause damage due to the excess force that is applied directly to the piping bracket.


Recommended Tightening Torque (N·m)

Connection thread	M5	1/8	1/4	3/8	1/2	3/4	1
Torque	*	7 to 9	12 to 14	22 to 24	28 to 30	28 to 30	36 to 38

* After tightening by hand, tighten further approximately 1/6 turn using a tightening tool.

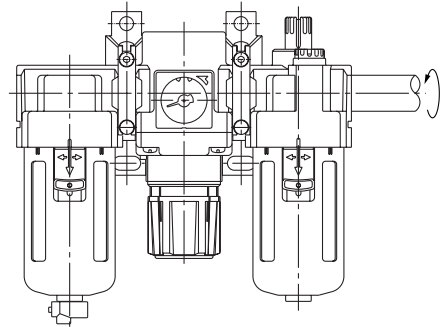

2. Avoid excessive torsional moment or bending moment other than those caused by the equipment's own weight as this can cause damage. Support external piping separately.

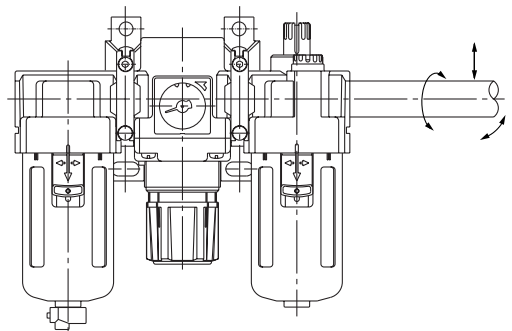

3. Piping materials without flexibility such as steel tube piping are prone to be affected by excess moment load and vibration from the piping side. Use flexible tubing in between to avoid such an effect.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

F.R.L. (Filter/Regulator/Lubricator)

Precautions 3



Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions on the products mentioned in this catalog, and refer to main text for more detailed precautions on every series.

Piping

⚠ Caution

1. Lubricator

Try to avoid riser piping and branch lines as much as possible on the outlet side, otherwise proper lubrication will be compromised.

2. Float type auto-drain

Drain piping should be performed under the following conditions to avoid malfunction.

<N.O. type>

- Use piping whose I.D. is $\phi 6.5$ or larger, and whose length is 5 m or less. Avoid riser piping.

<N.C. type>

- AD17/27: Use piping whose I.D. is $\phi 2.5$ or larger
AD37/47: Use piping whose I.D. is $\phi 4$ or larger
Length is 5 m or less. Avoid riser piping.

Air Supply

⚠ Caution

1. When there is excessive condensate, install a device that eliminates water such as a dryer or water separator (Drain Catch) on the inlet side of the air filter.

Maintenance

⚠ Warning

1. When disassembly or installation is required during the maintenance, repair, or replacement of a device, be sure to follow the instructions provided in the instruction manual or safety instructions in this catalog.
2. Perform periodical inspections to detect any cracks, scratches, or other deterioration of the transparent resin bowl of the air filter, filter regulator, and lubricator or the sight dome of the lubricator.
Replace with a new bowl, sight dome, or metal bowl when any kind of deterioration is found, otherwise this can cause damage.
3. Perform periodical inspections to detect dirt on the transparent resin bowl of the air filter, filter regulator, and lubricator or the sight dome of the lubricator. When you find dirt on any of the above devices, clean with a mild household cleanser. Do not use other cleaning agents, otherwise this can cause damage.
4. Air filter
 - 1) Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.
 - 2) Release accumulated condensate periodically before it reaches the maximum capacity. Condensate that flows out to the outlet side can cause malfunctions.

Maintenance

⚠ Warning

5. Mist separator, Micro mist separator

- 1) Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.
- 2) Release accumulated condensate periodically before it reaches the maximum capacity. Condensate that flows out to the outlet side can cause malfunctions.

6. Lubricator

- 1) Use class 1 turbine oil (without additives) ISO VG32. Using other lubricant can cause damage to devices and result in malfunctions.
- 2) For AL10 and AL20 type, replenish the lubricant after releasing the inlet pressure as lubricant cannot be properly applied in a pressurized condition.

⚠ Caution

1. Perform periodical inspections of the filter element and replace it as necessary. Check the element whenever the outlet pressure drops below normal or air does not flow smoothly during operation.
2. Regulator and filter regulator
Check the sliding part or seat of the internal valve when a setting malfunction or relief leakage occur and temporary or emergency repairs need to be made.
3. Lubricator
Check the dripping amount once a day. Drip failure can cause damage to the components being lubricated.
4. Float type auto drain
 - 1) Turn the knob counterclockwise to release the drain manually. Avoid applying excessive torque to the knob, such as by using a tool, as this can damage an auto drain.
After releasing the condensate, turn the knob clockwise until it stops.
 - 2) Air leakage or other performance malfunctions can occur if premature clogging of the element or pressure drop causes the pressure inside the bowl to get outside the specified pressure range parameters. Check the pressure whenever such an irregularity occurs.

Modular F.R.L. Unit *Series AC*



F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA



AL

Introducing our latest F.R.L. units


Space-saving design

The use of compact spacer with bracket reduces the total assembling space.


Model		Reduction (mm)
New	Old	
AC10	AC1000	4
AC20	AC2000	14
AC25	AC2500	14
AC30	AC3000	14
AC40	AC4000	18
AC40-06	AC4000-06	18
AC50	AC5000	18
AC55	AC5500	18
AC60	AC6000	18

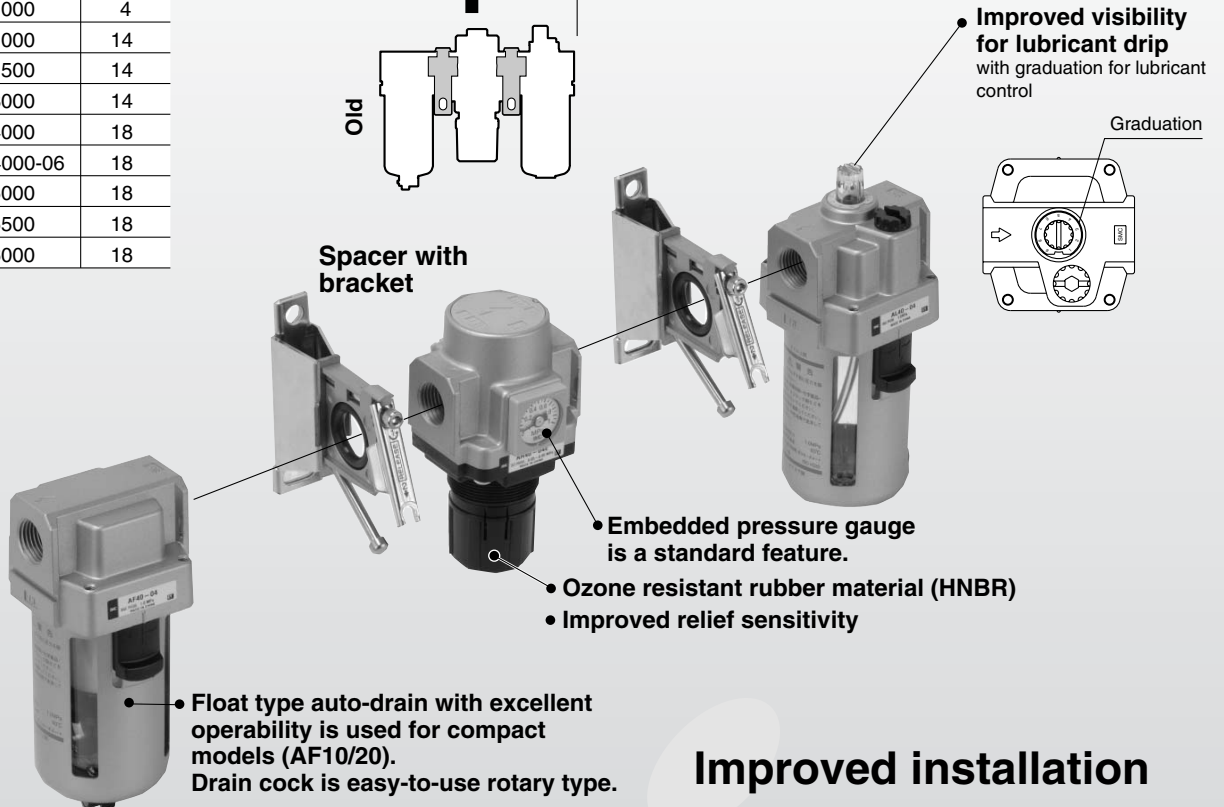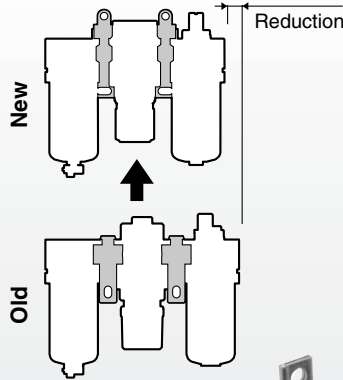

Improved installation

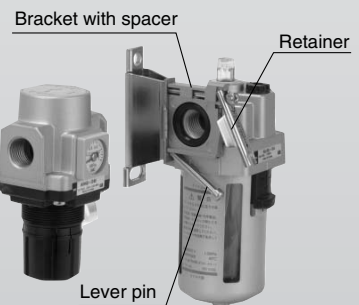

1. Attach the component into the fitting of the spacer with bracket.
2. Lock the lever pin into the retainer. (Temporary installation)

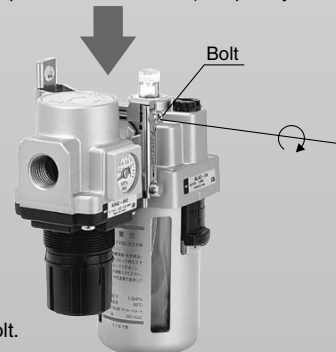

3. Tighten the bolt.






Knob cover

Prevents careless knob operation.



Part no.	Model
AR20P-580AS	AC20□, AR20, AR20K, AW20, AW20K, AWM20, AWD20
AR25P-580AS	AC25□, AR25, AR25K
AR30P-580AS	AC30□, AR30, AR30K, AW30, AW30K, AWM30, AWD30
AR40P-580AS	AC40□(-06), AR40(-06), AR40K(-06), AW40(-06), AW40K(-06), AWM40, AWD40

Standard Combination

Combination	Model	Port size	Component				
			Air filter AF	Regulator AR	Lubricator AL	Filter regulator AW	Mist separator AFM
AF + AR + AL 	AC10	M5 x 0.8	AF10	AR10	AL10		
	AC20	1/8, 1/4	AF20	AR20	AL20		
	AC25	1/4, 3/8	AF30	AR25	AL30		
	AC30	1/4, 3/8	AF30	AR30	AL30		
	AC40	1/4, 3/8, 1/2	AF40	AR40	AL40		
	AC40-06	3/4	AF40-06	AR40-06	AL40-06		
	AC50	3/4, 1	AF50	AR50	AL50		
	AC55	1	AF60	AR50	AL60		
	AC60	1	AF60	AR60	AL60		
AW + AL 	AC10A	M5 x 0.8			AL10	AW10	
	AC20A	1/8, 1/4			AL20	AW20	
	AC30A	1/4, 3/8			AL30	AW30	
	AC40A	1/4, 3/8, 1/2			AL40	AW40	
	AC40A-06	3/4			AL40-06	AW40-06	
AF + AR 	AC10B	M5 x 0.8	AF10	AR10			
	AC20B	1/8, 1/4	AF20	AR20			
	AC25B	1/4, 3/8	AF30	AR25			
	AC30B	1/4, 3/8	AF30	AR30			
	AC40B	1/4, 3/8, 1/2	AF40	AR40			
	AC40B-06	3/4	AF40-06	AR40-06			
	AC50B	3/4, 1	AF50	AR50			
	AC55B	1	AF60	AR50			
	AC60B	1	AF60	AR60			
AF + AFM + AR 	AC20C	1/8, 1/4	AF20	AR20			AFM20
	AC25C	1/4, 3/8	AF30	AR25			AFM30
	AC30C	1/4, 3/8	AF30	AR30			AFM30
	AC40C	1/4, 3/8, 1/2	AF40	AR40			AFM40
	AC40C-06	3/4	AF40-06	AR40-06			AFM40-06
AW + AFM 	AC20D	1/8, 1/4				AW20	AFM20
	AC30D	1/4, 3/8				AW30	AFM30
	AC40D	1/4, 3/8, 1/2				AW40	AFM40
	AC40D-06	3/4				AW40-06	AFM40-06

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Table of Contents

■ F.R.L. Unit

Air Filter + Regulator + Lubricator AC10 to 60	Page 14-2-5
Filter Regulator + Lubricator AC10A to 40A	Page 14-2-16
Air Filter + Regulator AC10B to 60B	Page 14-2-18
Air Filter + Mist Separator + Regulator AC20C to 40C	Page 14-2-20
Filter Regulator + Mist separator AC20D to 40D	Page 14-2-22
Attachment Specifications	Page 14-2-24
Spacers and Brackets:	
Accessory	Page 14-2-29
Made to Order Specifications	Page 14-2-31

■ Modular Style Air Filter

Air Filter AF10 to 60	Page 14-2-34
Made to Order Specifications	Page 14-2-39
Mist Separator AFM20 to 40	Page 14-2-40
Micro Mist Separator AFD20 to 40	Page 14-2-43

■ Modular Style Regulator

Regulator AR10 to 60	Page 14-2-47
Made to Order Specifications	Page 14-2-53
Regulator with Back Flow Mechanism AR20K to 60K	Page 14-2-54

■ Modular Style Lubricator

Lubricator AL10 to 60	Page 14-2-61
--------------------------	--------------

■ Modular Style Filter Regulator

Filter Regulator AW10 to 40	Page 14-2-67
Made to Order Specifications	Page 14-2-72
Filter Regulator with Back Flow Mechanism AW20K to 40K	Page 14-2-74
Mist Separator Regulator AWM20 to 40	Page 14-2-78
Micro Mist Separator Regulator AWD20 to 40	Page 14-2-82

Simple Specials System

A system designed to respond quickly and easily to your special ordering needs.

Simple Specials Order Specifications

1. Modular/Attachment combination & Combination order
Attachment symbols:
Piping adapter: E□0
Pressure switch: IS1000□
Check valve: AKM
Cross interface: Y□4
Residual pressure relief 3 port valve: VHS□□
2. Modular products, Combination of special order numbers & Combination order
Special orders for AF, AR, AL, AW, AF□, AW□

Simple
Specials
System

Short lead times

This system enables us to respond to your special needs, such as additional machining, accessory assembly, or modular unit, and deliver such special products as quickly as standard products.

Repeat orders

As soon as we receive a Simple Special part number from your previous order, we will process the order, manufacture the product, and deliver it to you.

Please contact SMC for further details on the Simple Specials System.

How to Order

AC 30 A F 03 DE KV 12R

F.R.L. unit

Body size

10	20	25	30	40	50	55	60
----	----	----	----	----	----	----	----

Model combination

Symbol	Combination				
	Air filter	Regulator	Lubricator	Filter regulator	Mist separator
Nil	(1)	(2)	(3)	—	—
A	—	—	(2)	(1)	—
B	(1)	(2)	—	—	—
C	(1)	(3)	—	—	(2)
D	—	—	—	(1)	(2)

Note 1) The number inside () indicates the combination order counted from the inlet side.

Thread type

Nil	Metric system thread (M5)
	Rc
N (2)	NPT
F (3)	G

Note 2) Drain guide is NPT 1/4 (applicable to AC25 to 60), and the exhaust port for auto-drain comes with ø3/8" One-touch fitting (applicable to AC25 to 60).

Note 3) Drain guide is G 1/4 (applicable to AC25 to 60).

Port size

Symbol	Port size	Body size							
		10	20	25	30	40	50	55	60
M5	M5	●	—	—	—	—	—	—	—
01	1/8	—	●	—	—	—	—	—	—
02	1/4	—	●	●	●	—	—	—	—
03	3/8	—	—	●	●	●	—	—	—
04	1/2	—	—	—	—	●	—	—	—
06	3/4	—	—	—	—	—	●	●	—
10	1	—	—	—	—	—	—	●	●

Accessory

Symbol	Description	Applicable model
Nil	—	—
C	Float type auto-drain (N.C.) (4)	AC10□ to 60□
D	Float type auto-drain (N.O.) (4)	AC25□ to 60□
E	With square embedded type pressure gauge (With limit indicator)	AC20□ to 60□
G (5)	With round pressure gauge (Without limit indicator)	AC10□
	With round pressure gauge (With limit indicator)	AC20□ to 60□

Note 4) Applicable tubing O.D for auto-drain connection should be ø3/8" in case NPT thread port is chosen.

Note 5) Mounting thread for pressure gauge: 1/16 for AC10; 1/8 for AC20 to 30; 1/4 for AC40 to 60
Pressure gauge is not mounted and is supplied loose at the time of shipment.

Option

Symbol	Description	Applicable model
1 (11)	0.02 to 0.2 MPa setting	AC10□ to 60□
2	Metal bowl	AC10□ to 60□
3	Lubricator with drain cock	AC10□ to 60□
6	Nylon bowl	AC10□ to 60□
8	Metal bowl with level gauge	AC25□ to 60□
C	With bowl guard	AC25□ to 60□
J (12)	Drain guide 1/4	AC10□ to 60□
N	Non-relieving type	AC10□ to 60□
R	Flow direction: Right → Left	AC10□ to 60□
W	Drain cock with barb fitting: ø6 x ø4 nylon tubing	AC25□ to 60□
Z (13)	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	AC10□ to 60□

* When more than one specification is required, indicate in ascending alphanumeric order.

Note 11) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 12) Without a valve function.

Note 13) For thread types M5 and NPT.

This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Pressure switch comes with a dual unit scale in SI (MPa) and imperial (PSI) units.

Attachment

Symbol	Description	Attachment mounting position	Applicable model	Port size for intermediate air release
Nil	None	—	—	—
K	Check valve	AF + AR + [K] + AL	AC20 to 40	AC20□: 1/8 AC25□: 1/4 AC30□: 1/4 AC40□: 3/8
		AW + [K] + AL	AC20A to 40A	
S	Pressure switch	AF + AR + [S] + AL	AC20 to 60	—
		AW + [S] + AL	AC20A to 40A	
		AF + [S] + AR	AC20B to 60B	
		AF + AFM + [S] + AR	AC20C to 40C	
T	T-interface	AF + [T] + AR	AC20D to 40D	—
		AF + AFM + [T] + AR	AC20E to 40E	
V	Residual pressure relief 3 port valve	AF + AR + AL + [V]	AC20 to 50	—
		AW + AL + [V]	AC20A to 40A	
		AF + AR + [V]	AC20B to 50B	
		AF + AFM + AR + [V]	AC20C to 40C	
V1	Residual pressure relief 3 port valve	AW + AFM + [V]	AC20D to 40D	—
		[V] + AF + AR□K	AC20B to 50B	
		[V] + AF + AFM + AR□K	AC20C to 40C	
		[V] + AW□K + AFM	AC20D to 40D	

Note 6) When more than one attachment is required, order in alphabetical order.

Note 7) Piping adapter, pressure switch with piping adapter, and cross interface need to be ordered separately.

Note 8) Please contact SMC when using a pressure switch and T-interface together for AC□B.

Note 9) The bracket position varies depending on the T-interface or pressure switch mounting. Refer to the table on page 14-2-30 for standard bracket position.

Note 10) With this combination, regulators and filter regulators will be "with back flow function" type.

For safety, check that the outlet pressure is exhausted and is atmospheric pressure by pressure gauge.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Series AC


Accessory/Optional Specifications Combination

⊙: Combination available □: Combination not available ○: Varies depending on the model △: Available only with NPT thread

Combination Accessory/ Optional specifications	Symbol	Accessory													Optional specifications										F.R.L. unit applicable model														
															1	2	3	6	8	C	J	N	R	W	Z	AC10	AC10B	AC20	AC20B	AC20C	AC20D	AC25	AC25B	AC25C	AC30	AC30A	AC30B	AC30C	AC30D
		C	D	E	G	1	2	3	6	8	C	J	N	R	W	Z	AC10A	AC10B	AC20A	AC20B	AC20C	AC20D	AC25	AC25B	AC25C	AC30	AC30A	AC30B	AC30C	AC30D									
Float type auto-drain (N.C.)	C	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Float type auto-drain (N.O.)	D	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Square embedded type pressure gauge	E	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Round pressure gauge	G	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
0.02 to 0.2 MPa setting	-1	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Metal bowl	-2	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Lubricator with drain cock	-3	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Nylon bowl	-6	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Metal bowl with level gauge	-8	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
With bowl guard	-C	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Drain guide 1/4	-J	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Non-relieving type	-N	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Flow direction: Right →Left	-R	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Drain cock with barb fitting: ø6 x ø4 nylon tubing	-W	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	△	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙										
Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△									

Attachment

	Port size	Function	
Piping adapter	M5 x 0.8 1/8, 1/4, 3/8, 1/2, 3/4, 1	Allows installation/removal of the component without removing the piping.	P. 14-2-24
T-interface	M5 x 0.8 1/8, 1/4, 3/8, 1/2	Redirects the air flow.	P. 14-2-24
Pressure switch with piping adapter	1/8, 1/4, 3/8, 1/2, 3/4	Compact switch and piping adapter integrated into one piece.	P. 14-2-25
Check valve	1/8, 1/4, 3/8	Prevents back flow from lubricator.	P. 14-2-26
Pressure switch	—	Compact switch	P. 14-2-27
Cross interface	M5 x 0.8 1/8, 1/4, 3/8, 1/2	Allows piping in all 4 directions.	P. 14-2-27
Residual pressure relief 3 port valve	1/8, 1/4, 3/8, 1/2, 3/4, 1	Releases residual pressure in lines.	P. 14-2-28

 **Attachment Accessory**
Refer to pages 14-2-29 to 30 for interfaces and brackets.

 **Made to Order Specifications**
Refer to page 14-2-31 for details.

F.R.L.**AV****AU****AF****AR****IR****VEX****AMR****ITV****IC****VBA****VE□****VY1****G****PPA****AL**


F.R.L. Unit Air Filter + Regulator + Lubricator

Series AC10 to 60



P. 14-2-31

JIS Symbol



Air filter Regulator Lubricator

Standard Specifications

Model	AC10	AC20	AC25	AC30	AC40	AC40-06	AC50	AC55	AC60	
Component	Air filter	AF10	AF20	AF30	AF30	AF40	AF40-06	AF50	AF60	AF60
	Regulator	AR10	AR20	AR25	AR30	AR40	AR40-06	AR50	AR50	AR60
	Lubricator	AL10	AL20	AL30	AL30	AL40	AL40-06	AL50	AL60	AL60
Port size	M5 x 0.8	1/8 1/4	1/4 3/8	1/4 3/8	1/4 3/8 1/2	3/4	3/4 1	1	1	
Pressure gauge port size ⁽¹⁾	1/16	1/8	1/8	1/8	1/4	1/4	1/4	1/4	1/4	
Fluid	Air									
Proof pressure	1.5 MPa									
Max. operating pressure	1.0 MPa									
Set pressure range	0.05 to 0.7 MPa	0.05 to 0.85 MPa								
Relief pressure	Set pressure + 0.05 MPa ⁽²⁾ (at relief flow rate of 0.1 l/min (ANR))									
Ambient and fluid temperature	-5 to 60°C (With no freezing)									
Nominal filtration rating	5 μm									
Recommended lubricant	Class 1 turbine oil (ISO VG32)									
Bowl material	Polycarbonate									
Bowl guard	—	Option	Standard							
Regulator construction	Relieving type									
Weight (kg)	0.27	0.73	0.91	1.00	1.74	1.95	4.17	4.25	4.34	



Note 1) Pressure gauge connection threads are not required for F.R.L. unit with a square embedded type pressure gauge (AC20 to AC60).

Note 2) Not applicable to AC10.

Attachment/Accessory Part No.

Description	Model	Part no.									
		AC10	AC20	AC25	AC30	AC40	AC40-06	AC50	AC55	AC60	
Accessory	Pressure gauge ⁽¹⁾	1.0 MPa Round type	G-27-10-R1	G36-10-□01	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02	G46-10-□02	G46-10-□02	G46-10-□02
		Square embedded type ⁽²⁾	—	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS
	0.2 MPa	Round type	G-27-10-R1 ⁽³⁾	G36-2-□01	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02	G46-2-□02	G46-2-□02	G46-2-□02
		Square embedded type ⁽²⁾	—	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS
Float type auto-drain ⁽⁴⁾	N.O.	—	—	AD38/AD38N ⁽⁷⁾	AD38/AD38N ⁽⁷⁾	AD48/AD48N ⁽⁷⁾	AD48/AD48N ⁽⁷⁾	AD48/AD48N ⁽⁷⁾	AD48/AD48N ⁽⁷⁾	AD48/AD48N ⁽⁷⁾	
	N.C.	AD17	AD27	AD37/AD37N ⁽⁷⁾	AD37/AD37N ⁽⁷⁾	AD47/AD47N ⁽⁷⁾	AD47/AD47N ⁽⁷⁾	AD47/AD47N ⁽⁷⁾	AD47/AD47N ⁽⁷⁾	AD47/AD47N ⁽⁷⁾	
Spacer		Y100	Y200	Y300	Y300	Y400	Y500	Y600	Y600	Y600	
Check valve ⁽⁵⁾ ⁽⁶⁾		—	AKM2000-□01 □02	AKM3000-□01 □02	AKM3000-□01 □02	AKM4000-□02 □03	—	—	—	—	
Pressure switch ⁽⁶⁾		—	IS1000M-20	IS1000M-30	IS1000M-30	IS1000M-40	IS1000M-50	IS1000M-60	IS1000M-60	IS1000M-60	
T-interface ⁽⁵⁾ ⁽⁶⁾	Y110-M5	Y210-□01 □02	Y310-□01 □02	Y310-□01 □02	Y410-□02 □03	Y510-□03 □04	Y610-□03 □04	Y610-□03 □04	Y610-□03 □04	Y610-□03 □04	
Residual pressure relief 3 port valve ⁽⁶⁾	—	VHS20-□01 □02	VHS30-□02 □03	VHS30-□02 □03	VHS40-□02 □03 □04	VHS40-□02 □03 □04	VHS50-□06 □10	—	—	—	
Piping adapter ⁽⁶⁾	E100-M5	E200-□01 □02 □03	E300-□02 □03 □04	E300-□02 □03 □04	E400-□02 □03 □04 □06	E500-□06	E600-□06 □10	E600-□06 □10	E600-□06 □10		
Pressure switch ⁽⁶⁾ with piping adapter	—	IS1000E-20-□01 □02 □03	IS1000E-30-□02 □03 □04	IS1000E-30-□02 □03 □04	IS1000E-40-□02 □03 □04 □06	—	—	—	—		
Cross interface ⁽⁶⁾	Y14-M5	Y24-□01 □02	Y34-□01 □02	Y34-□01 □02	Y44-□02 □03	Y54-□03 □04	—	—	—		



Note 1) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 2) Includes one O-ring and 2 mounting screws.

Note 3) For 1.0 MPa.

Note 4) Minimum operating pressure: N.O. type—0.1 MPa; N.C. type—0.15 MPa (AD17/27).

Note 5) For F.R.L. units, port sizes not in () are for standard application.


Note 6) Separate interfaces are required for modular unit.

Note 7) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".


Flow Characteristics (Representative values)

Condition: Inlet pressure 0.7 MPa


AC10 M5 x 0.8

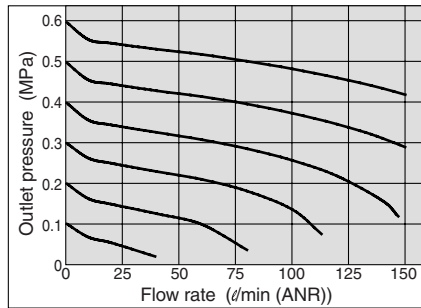


AC40-06 Rc 3/4

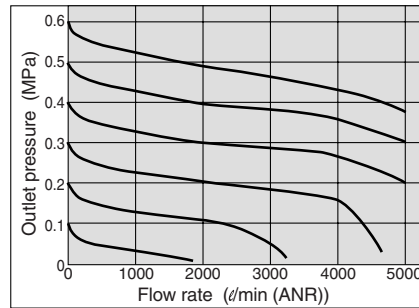


AC20 Rc 1/4

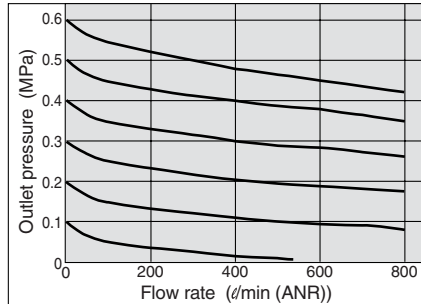


AC50 Rc 1

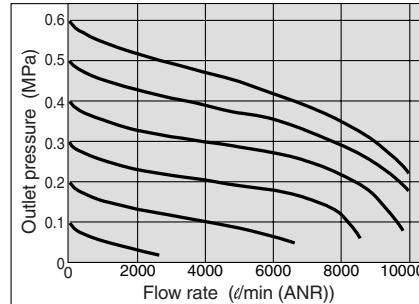


AC25 Rc 3/8

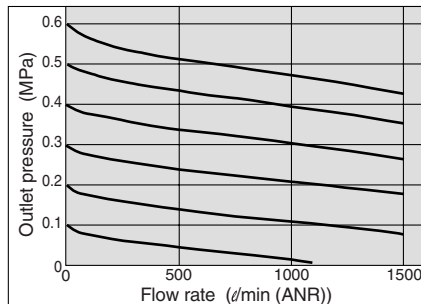


AC55 Rc 1

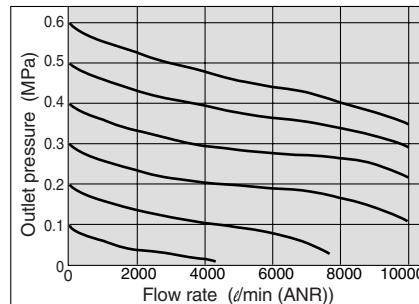


AC30 Rc 3/8

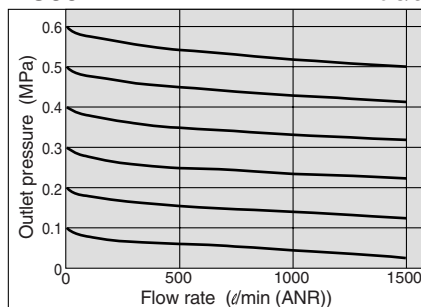

AC60 Rc 1

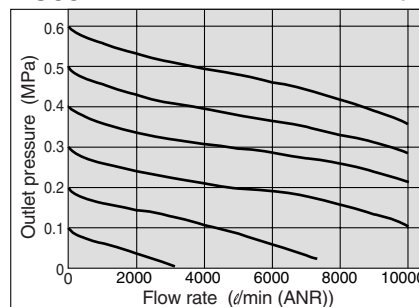

AC40 Rc 1/2

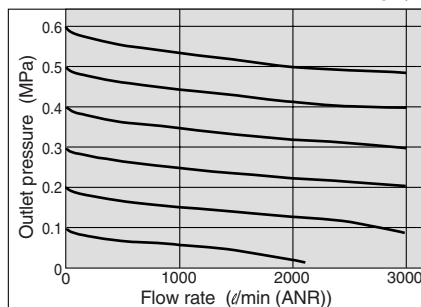

Selection

⚠ Warning

1. Float type auto-drain

Operate under the following conditions to avoid malfunction.

<N.O. type>

- Operating compressor: 0.75 kW (100 l/min (ANR)) or more.

When using 2 or more auto drains, multiply the value above by the number of auto-drains to find the capacity of the compressors you will need.

For example, when using 2 auto-drains, 1.5 kW (200 l/min (ANR)) of the compressor capacity is required.

- Operating pressure: 0.1 MPa or more.

<N.C. type>

- Operating pressure for AD17, AD27: 0.1 MPa or more.
- Operating pressure for AD37, AD47: 0.15 MPa or more.

2. Use a regulator or filter regulator with a back flow mechanism when mounting a 3 port valve for residual pressure release on the IN side to ensure the release of the residual pressure. Otherwise, residual pressure will not be fully released.

⚠ Caution

1. When releasing air at the intermediate position using a T-interface on the inlet side of the lubricator, lubricant may back flow. Therefore, releasing air that does not contain traces of lubricant is not possible.

To release air that does not contain traces of lubricant, use a check valve (Series AKM) on the inlet side of the lubricator to prevent a back flow of the lubricant.

2. Mounting a 3 port valve for residual pressure release on the IN side of the lubricator can cause lubricant to back flow. Take measures to prevent lubricant from splashing by installing a filter on the EXH port.
3. An F.R.L. unit shipped from the plant has its model number labeled. However, components that are combined together during the distribution process do not have a label on them.
4. Please contact SMC when mounting a pressure switch, T-interface, or filter regulator on the OUT side of the 3 port valve for residual pressure release.

⚠ Precautions

Mounting and Adjustment

⚠ Caution

1. A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 for details.

Piping

⚠ Warning

1. When mounting a check valve, make sure the arrow (IN side) points in the correct direction of air flow.

Air Supply

⚠ Caution

1. Use an air filter with 5 μm or less filtration rating on the inlet side of the valve to avoid any damage to the seat caused by dust when mounting a 3 port valve for residual pressure release on the inlet side.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA


AL

Series AC10 to 60


Conditions:
 Inlet pressure 0.7 MPa
 Outlet pressure 0.2 MPa
 Flow rate 20 l/min (ANR)

Pressure Characteristics (Representative values)


AC10

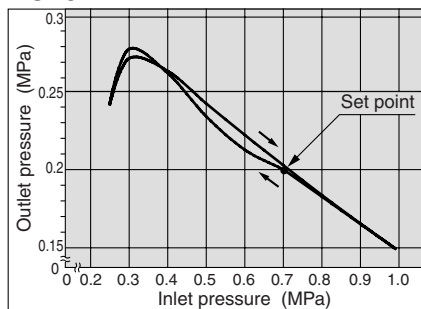


AC40-06

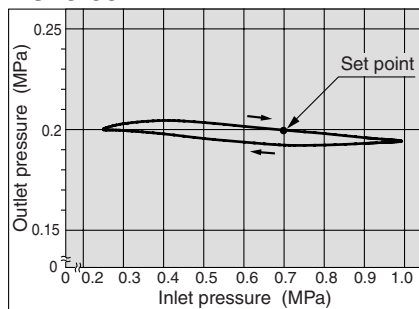


AC20

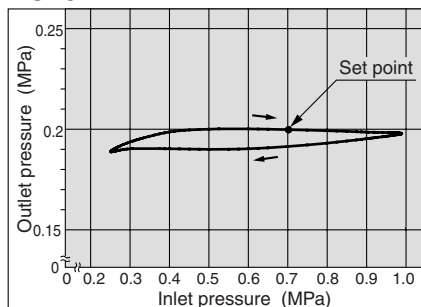


AC50

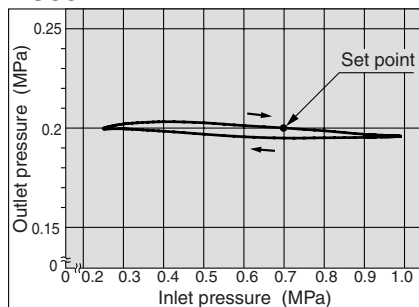


AC25

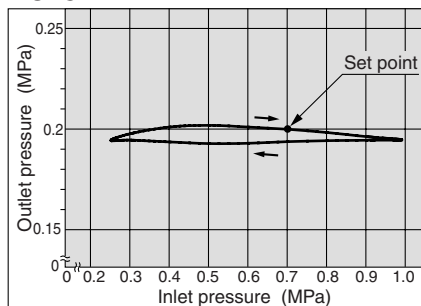


AC55

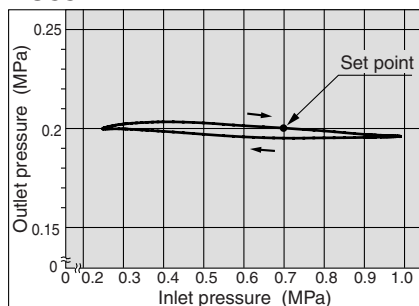


AC30

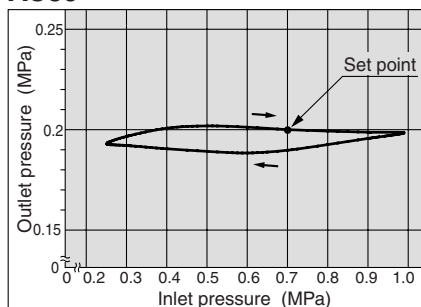

AC60

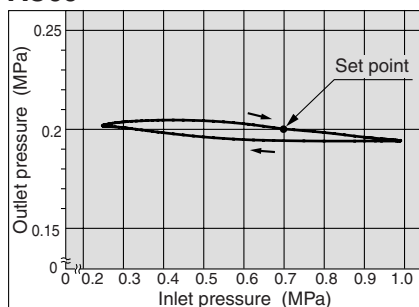


AC40

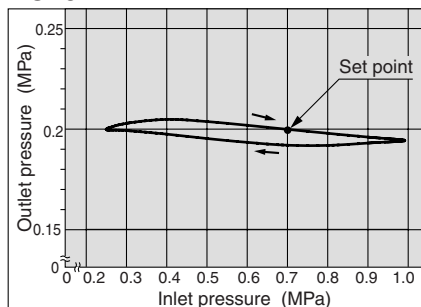


F.R.L. Unit Series AC10 to 60

Dimensions

AC10/20

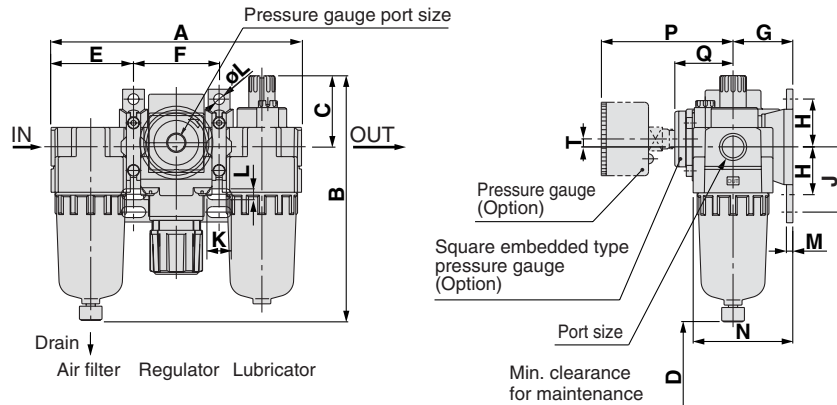

AC25/30/40/50/55/60

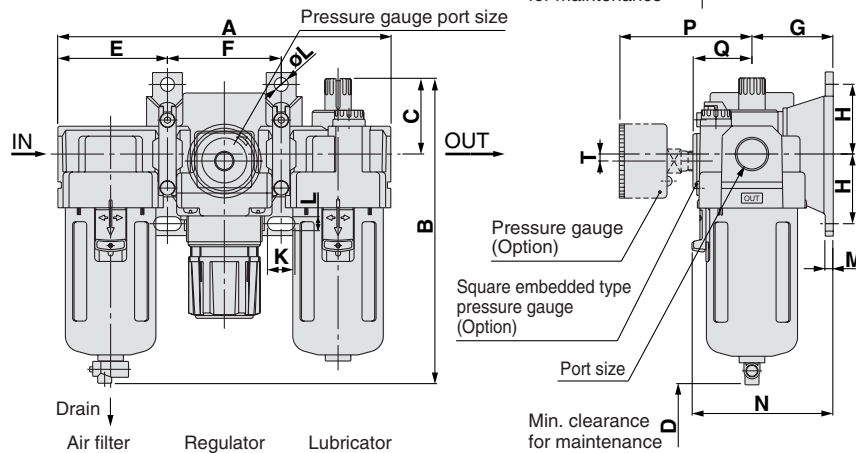

Applicable model	AC10, AC20		AC25, AC30, AC40, AC40-06, AC50, AC55, AC60				
Optional specifications	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
			 N.O.: Black N.C.: Gray ø10 One-touch fitting			 Width across flats 17	 Barb fitting Applicable tubing: T0604

Model	Port size	Standard specifications														Accessory specifications			
		A	B	C	D	Bracket mounting size								With pressure gauge		With auto-drain			
						E	F	G	H	J	K	L	øL	M	N		P	Q	T
AC10	M5 x 0.8	87	85	26	35	28	31	25	20	27	7	4.5	4.5	2.8	40	26	—	0	104
AC20	1/8, 1/4	126	123	36	60	41.5	43	30	24	33	12	5.5	5.5	3.2	50	65	29.5	2 ⁽¹⁾	141
AC25	1/4, 3/8	167	153	38	80	55	57	41	35	—	14	7	7	4	71	64	28.5	0	194
AC30	1/4, 3/8	167	153	38	80	55	57	41	35	—	14	7	7	4	71	66	30.5	3.5	194
AC40	1/4, 3/8, 1/2	220	187	40	110	72.5	75	50	40	—	18	9	9	4	88	74	35	3.5	226
AC40-06	3/4	235	187	38	110	77.5	80	50	40	—	18	9	9	4.6	88	74	35	3	226
AC50	3/4, 1	282	264	43	110	93	96	70	50	—	20	11	11	6.4	115	84	44.5	3.3	303
AC55	1	292	279	45	110	98	96	70	50	—	20	11	11	6.4	117.5	84	44.5	3.3	318
AC60	1	297	280	46	110	98	101	70	50	—	20	11	11	6.4	117.5	84	44.5	3.3	318


Model	Optional specifications ⁽²⁾			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AC10	—	—	85	—
AC20	—	—	123	—
AC25	161	160	166	186
AC30	161	160	166	186
AC40	195	194	200	220
AC40-06	195	194	200	220
AC50	272	271	276	296
AC55	287	286	292	312
AC60	288	287	293	313

Note 1) For AC20 only, the position of the pressure gauge is above the center of the piping.
 Note 2) For optional specifications (with barb fitting, with drain guide, with metal bowl, or with level gauge), the total length (dimension for B) will vary.

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE
- VY1
- G
- PPA
- AL


F.R.L. Unit Filter Regulator + Lubricator

Series AC10A to 40A

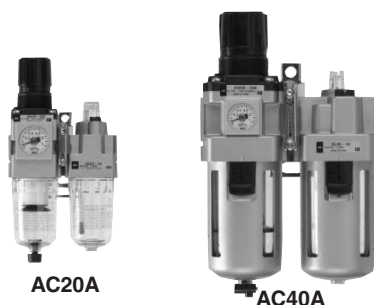

P. 14-2-31

JIS Symbol



Standard Specifications

Model		AC10A	AC20A	AC30A	AC40A	AC40A-06
Component	Filter regulator	AW10	AW20	AW30	AW40	AW40-06
	Lubricator	AL10	AL20	AL30	AL40	AL40-06
Port size		M5 x 0.8	1/8 1/4	1/4 3/8	1/4 3/8 1/2	3/4
Pressure gauge port size ⁽¹⁾		1/16	1/8	1/8	1/4	1/4
Fluid		Air				
Proof pressure		1.5 MPa				
Maximum operating pressure		1.0 MPa				
Set pressure range		0.05 to 0.7 MPa	0.05 to 0.85 MPa			
Relief pressure		Set pressure + 0.05 MPa ⁽²⁾ (at relief flow rate of 0.1 ℓ/min (ANR))				
Ambient and fluid temperature		-5 to 60°C (With no freezing)				
Nominal filtration rating		5 μm				
Recommended lubricant		Class 1 turbine oil (ISO VG32)				
Bowl material		Polycarbonate				
Bowl guard		—	Option	Standard		
Filter regulator construction		Relieving type				
Weight (kg)		0.20	0.59	0.75	1.41	1.46

Note 1) Pressure gauge connection threads are not required for F.R.L. unit with a square embedded type pressure gauge (AC20A to AC40A).
 Note 2) Not applicable to AC10A.

Attachment/Accessory Part No.

Description	Model	Part no.							
		AC10A	AC20A	AC30A		AC40A		AC40A-06	
Accessory Pressure gauge ⁽¹⁾	1.0 MPa	Round type	G27-10-R1	G36-10-□01	G36-10-□01		G46-10-□02		G46-10-□02
		Square embedded type ⁽²⁾	—	GC3-10AS	GC3-10AS		GC3-10AS		GC3-10AS
	0.2 MPa	Round type	G27-10-R1 ⁽³⁾	G36-2-□01	G36-2-□01		G46-2-□02		G46-2-□02
		Square embedded type ⁽²⁾	—	GC3-2AS	GC3-2AS		GC3-2AS		GC3-2AS
Float type auto-drain ⁽⁴⁾	N.O.	—	—	AD38	AD38N ⁽⁷⁾	AD48	AD48N ⁽⁷⁾	AD48	AD48N ⁽⁷⁾
	N.C.	AD17	AD27	AD37	AD37N ⁽⁷⁾	AD47	AD47N ⁽⁷⁾	AD47	AD47N ⁽⁷⁾
Spacer		Y100	Y200	Y300		Y400		Y500	
Check valve ⁽⁵⁾ ⁽⁶⁾		—	AKM2000- □01 □02	AKM3000- □01 □02		AKM4000- □02 □03		—	
Pressure switch ⁽⁶⁾		—	IS1000M-20	IS1000M-30		IS1000M-40		IS1000M-50	
T-interface ⁽⁵⁾ ⁽⁶⁾		Y110-M5	Y210- □01 □02	Y310- □01 □02		Y410- □02 □03		Y510- □02 □03	
Residual pressure relief 3 port valve ⁽⁶⁾		—	VHS20- □01 □02	VHS30- □02 □03		VHS40- □02 □03 □04		VHS40-□06	
Piping adapter ⁽⁶⁾		E100-M5	E200- □01 □02 □03	E300- □02 □03 □04		E400- □02 □03 □04 □06		E500-□06	
Pressure switch with piping adapter ⁽⁶⁾		—	IS1000E-20 □01 □02 □03	IS1000E-30 □02 □03 □04		IS1000E-40 □02 □03 □04 □06		—	
Cross interface ⁽⁶⁾		Y14-M5	Y24- □01 □02	Y34- □01 □02		Y44- □02 □03		Y54- □03 □04	

Note 1) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 2) Includes one O-ring and 2 mounting screws.

Note 3) For 1.0 MPa.

Note 4) Minimum operating pressure: N.O. type—0.1 MPa (AD17/27); N.C. type—0.15 MPa (AD37/47).

Note 5) For F.R.L. units, port sizes not in () are for standard application.


Note 6) Separate interfaces are required for modular unit.

Note 7) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".


F.R.L. Unit Series AC10A to 40A

Dimensions

AC10A/20A

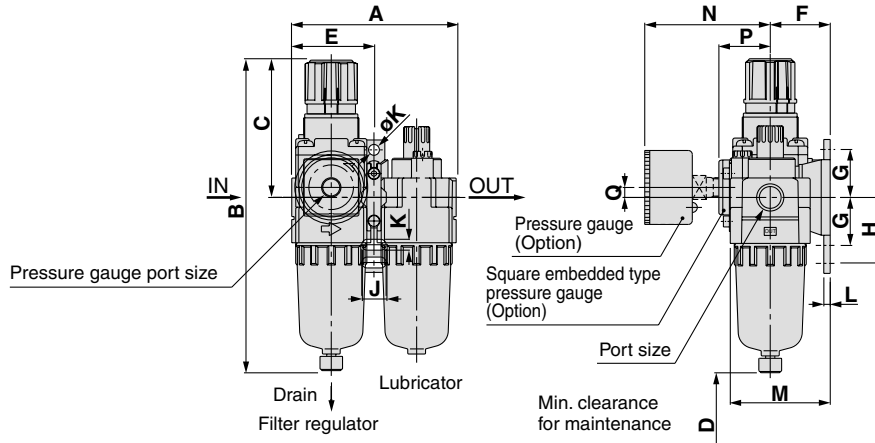

AC30A/40A

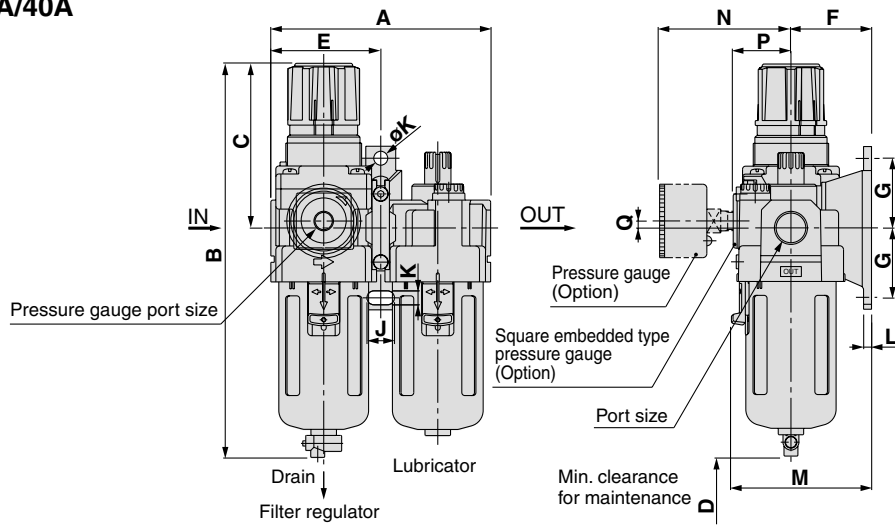

Applicable model	AC10A, AC20A			AC30A, AC40A, AC40A-06			
	Optional specifications	With auto-drain (N.C.) 	Metal bowl 	With auto-drain (N.O./N.C.) N.O.: Black N.C.: Gray ø10 One-touch fitting	Metal bowl 	Metal bowl with level gauge 	With drain guide Width across flats 17

(mm)

Model	Port size	Standard specifications												Accessory specifications				
		A	B	C	D	Bracket mounting size								N	P	Q	B	
						E	F	G	H	J	K	øK	L					M
AC10A	M5 x 0.8	56	108	48	35	28	25	20	27	7	4.5	4.5	2.8	40	26	—	0	126
AC20A	1/8, 1/4	83	160	73	60	41.5	30	24	33	12	5.5	5.5	3.2	50	63	27	5	177
AC30A	1/4, 3/8	110	201	86	80	55	41	35	—	14	7	7	4	71	66	30.5	3.5	242
AC40A	1/4, 3/8, 1/2	145	239	92	110	72.5	50	40	—	18	9	9	4	88	76	38.5	1.5	278
AC40A-06	3/4	155	242	93	110	77.5	50	40	—	18	9	9	4.6	88	76	38.5	1.2	278


Model	Optional specifications <small>Note</small>			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AC10A	—	—	107	—
AC20A	—	—	160	—
AC30A	209	208	214	234
AC40A	247	246	251	272
AC40A-06	250	249	255	275

Note) For optional specifications (with barb fitting, with drain guide, with metal bowl, or with level gauge), the total length (dimension for B) will vary.


- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL

F.R.L. Unit Air Filter + Regulator

Series AC10B to 60B

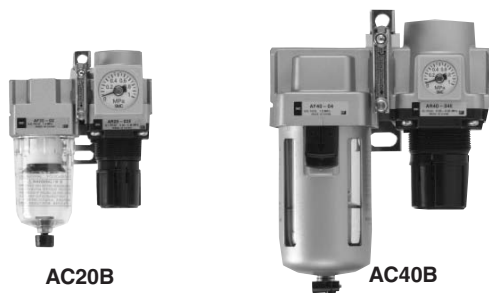

JIS Symbol



Standard Specifications

Model		AC10B	AC20B	AC25B	AC30B	AC40B	AC40B-06	AC50B	AC55B	AC60B
Component	Air filter	AF10	AF20	AF30	AF30	AF40	AF40-06	AF50	AF60	AF60
	Regulator	AR10	AR20	AR25	AR30	AR40	AR40-06	AR50	AR50	AR60
Port size		M5 x 0.8	1/8 1/4	1/4 3/8	1/4 3/8	1/4 3/8 1/2	3/4	3/4 1	1	1
Pressure gauge port size ⁽¹⁾		1/16	1/8	1/8	1/8	1/4	1/4	1/4	1/4	1/4
Fluid		Air								
Proof pressure		1.5 MPa								
Max. operating pressure		1.0 MPa								
Set pressure range		0.05 to 0.7 MPa	0.05 to 0.85 MPa							
Relief pressure		Set pressure + 0.05 MPa ⁽²⁾ (at relief flow rate of 0.1 ℓ/min (ANR))								
Ambient and fluid temperature		-5 to 60°C (With no freezing)								
Nominal filtration rating		5 μm								
Bowl material		Polycarbonate								
Bowl guard		—	Option	Standard						
Regulator construction		Relieving type								
Weight (kg)		0.16	0.51	0.55	0.63	1.12	1.16	2.44	2.45	2.54

Note 1) Pressure gauge connection threads are not required for F.R.L. unit with a square embedded type pressure gauge (AC20B to AC60B).
 Note 2) Not applicable to AC10B.

Attachment/Accessory Part No.

Description	Model	Part no.													
		AC10B	AC20B	AC25B	AC30B	AC40B	AC40B-06	AC50B	AC55B	AC60B					
Accessory	Pressure gauge	Round type	G27-10-R1	G36-10-□01	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02	G46-10-□02	G46-10-□02	G46-10-□02				
		Square embedded type ⁽²⁾	—	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS				
	Pressure gauge	Round type	G27-10-R1 ⁽³⁾	G36-2-□01	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02	G46-2-□02	G46-2-□02	G46-2-□02				
		Square embedded type ⁽²⁾	—	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS				
Float type auto-drain ⁽⁴⁾	N.O.	—	—	AD38	AD38N ⁽⁷⁾	AD38	AD38N ⁽⁷⁾	AD48	AD48N ⁽⁷⁾	AD48	AD48N ⁽⁷⁾	AD48	AD48N ⁽⁷⁾	AD48	AD48N ⁽⁷⁾
	N.C.	AD17	AD27	AD37	AD37N ⁽⁷⁾	AD37	AD37N ⁽⁷⁾	AD47	AD47N ⁽⁷⁾	AD47	AD47N ⁽⁷⁾	AD47	AD47N ⁽⁷⁾	AD47	AD47N ⁽⁷⁾
Spacer		Y100	Y200	Y300	Y300	Y400	Y400	Y500	Y600	Y600	Y600	Y600	Y600	Y600	Y600
Pressure switch ⁽⁶⁾		—	IS1000M-20	IS1000M-30	IS1000M-30	IS1000M-40	IS1000M-40	IS1000M-50	IS1000M-60	IS1000M-60	IS1000M-60	IS1000M-60	IS1000M-60	IS1000M-60	IS1000M-60
T-interface ⁽⁵⁾ ⁽⁶⁾		Y110-M5	Y210- ^{□01} ^(□02)	Y310- ^(□01) ^(□02)	Y310- ^(□01) ^(□02)	Y410- ^(□02) ^(□03)	Y410- ^(□02) ^(□03)	Y510- ^(□02) ^(□03)	Y610- ^{□03} ^(□04)	Y610- ^(□03) ^(□04)	Y610- ^(□03) ^(□04)	Y610- ^(□03) ^(□04)	Y610- ^(□03) ^(□04)	Y610- ^(□03) ^(□04)	Y610- ^(□03) ^(□04)
Residual pressure relief 3 port valve ⁽⁶⁾		—	VHS20- ^{□01} ^(□02)	VHS30- ^{□02} ^(□03)	VHS30- ^{□02} ^(□03)	VHS40- ^{□02} ^(□03) ^(□04)	VHS40- ^{□02} ^(□03) ^(□04)	VHS50- ^{□06} ^(□10)	—	—	—	—	—	—	—
Piping adapter ⁽⁶⁾		E100-M5	E200- ^{□01} ^(□02) ^(□03)	E300- ^{□02} ^(□03) ^(□04)	E300- ^{□02} ^(□03) ^(□04)	E400- ^{□02} ^(□03) ^(□04) ^(□06)	E400- ^{□02} ^(□03) ^(□04) ^(□06)	E500-□06	E600- ^{□06} ^(□10)	E600- ^{□06} ^(□10)	E600- ^{□06} ^(□10)	E600- ^{□06} ^(□10)	E600- ^{□06} ^(□10)	E600- ^{□06} ^(□10)	E600- ^{□06} ^(□10)
Pressure switch ⁽⁶⁾ with piping adapter		—	IS1000E-20 ^{□01} ^(□02) ^(□03)	IS1000E-30 ^{□02} ^(□03) ^(□04)	IS1000E-30 ^{□02} ^(□03) ^(□04)	IS1000E-40 ^{□02} ^(□03) ^(□04) ^(□06)	IS1000E-40 ^{□02} ^(□03) ^(□04) ^(□06)	—	—	—	—	—	—	—	—
Cross interface ⁽⁶⁾		Y14-M5	Y24- ^{□01} ^(□02)	Y34- ^{□01} ^(□02)	Y34- ^{□01} ^(□02)	Y44- ^{□02} ^(□03)	Y44- ^{□02} ^(□03)	Y54- ^{□03} ^(□04)	—	—	—	—	—	—	—

Note 1) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 2) Includes one O-ring and 2 mounting screws.

Note 3) For 1.0 MPa.

Note 4) Minimum operating pressure: N.O. type-0.1 MPa; N.C. type-0.1 MPa (AD17/27), 0.15 MPa (AD37/47).

Note 5) For F.R.L. units, port sizes not in () are for standard application.



Note 6) Separate interfaces are required for modular unit.

Note 7) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".



F.R.L. Unit Series AC10B to 60B

Dimensions

AC10B/20B

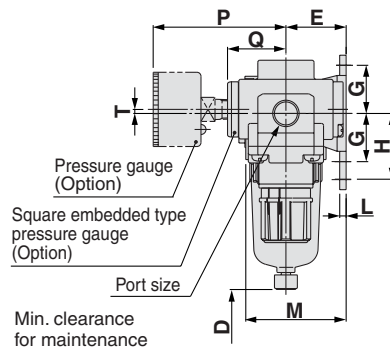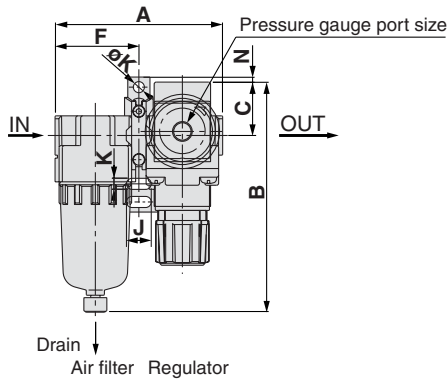

AC25B/30B/40B/50B/55B/60B

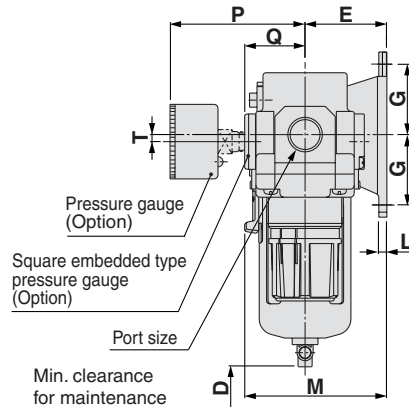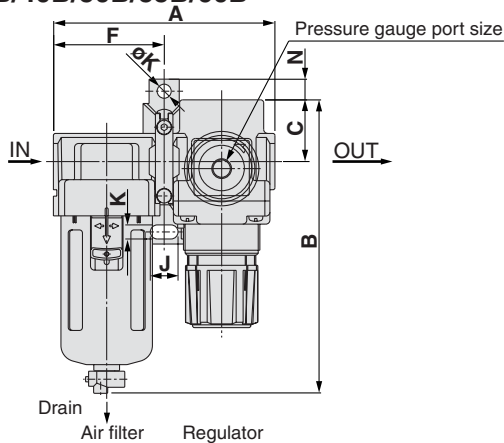

Applicable model	AC10B, AC20B		AC25B, AC30B, AC40B, AC40B-06, AC50B, AC55B, AC60B				
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications							
	M5 x 0.8		N.O.: Black N.C.: Gray ø10 One-touch fitting			1/4 Width across flats 17	Barb fitting Applicable tubing: T0604

(mm)

Model	Port size	Standard specifications														Accessory specifications			
		A	B	C	D	Bracket mounting size								With pressure gauge		With auto-drain			
						E	F	G	H	J	K	ØK	L	M	N	P	Q	T	B
AC10B	M5 x 0.8	56	71	11	25	25	28	20	27	7	4.5	4.5	2.8	40	13.5	26	—	0	89
AC20B	1/8, 1/4	83	114	26.5	40	30	41.5	24	33	12	5.5	5.5	3.2	50	2.5	65	29.5	2 (1)	132
AC25B	1/4, 3/8	110	143	28	50	41	55	35	—	14	7	7	4	71	13	64	28.5	0	184
AC30B	1/4, 3/8	110	146	31	50	41	55	35	—	14	7	7	4	71	10	66	30.5	3.5	187
AC40B	1/4, 3/8, 1/2	145	183	36	75	50	72.5	40	—	18	9	9	4	88	12	74	35	3.5	222
AC40B-06	3/4	155	185	36	75	50	77.5	40	—	18	9	9	4.6	88	12	74	35	3	224
AC50B	3/4, 1	186	264	43	20	70	93	50	—	20	11	11	6.4	115	16	84	44.5	3.3	303
AC55B	1	191	277	43	20	70	98	50	—	20	11	11	6.4	117.5	16	84	44.5	3.3	316
AC60B	1	196	280	46	20	70	98	50	—	20	11	11	6.4	117.5	13	84	44.5	3.3	319

Model	Optional specifications (2)			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AC10B	—	—	70	—
AC20B	—	—	114	—
AC25B	151	150	156	176
AC30B	154	153	159	179
AC40B	191	190	196	216
AC40B-06	193	192	198	218
AC50B	272	271	277	297
AC55B	285	284	290	310
AC60B	288	287	293	313

Note 1) For AC20 only, the position of the pressure gauge is above the center of the piping.

Note 2) For optional specifications (with barb fitting, with drain guide, with metal bowl, or with level gauge), the total length (dimension for B) will vary.

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE
- VY1
- G
- PPA
- AL


F.R.L. Unit Air Filter + Mist Separator + Regulator

Series AC20C to 40C



P. 14-2-31

JIS Symbol



Air filter Mist separator Regulator

Standard Specifications

Model		AC20C	AC25C	AC30C	AC40C	AC40C-06
Component	Air filter	AF20	AF30	AF30	AF40	AF40-06
	Mist separator	AFM20	AFM30	AFM30	AFM40	AFM40-06
	Regulator	AR20	AR25	AR30	AR40	AR40-06
Port size		1/8 1/4	1/4 3/8	1/4 3/8	1/4 3/8 1/2	3/4
Pressure gauge port size ⁽¹⁾		1/8	1/8	1/8	1/4	1/4
Fluid		Air				
Proof pressure		1.5 MPa				
Maximum operating pressure		1.0 MPa				
Minimum operating pressure		0.05 MPa				
Set pressure range		0.05 to 0.85 MPa				
Rated flow (ℓ/min (ANR)) ⁽²⁾		200	450	450	1100	1100
Relief pressure		Set pressure + 0.05 MPa (at relief flow rate of 0.1 ℓ/min (ANR))				
Ambient and fluid temperature		-5 to 60°C (With no freezing)				
Nominal filtration rating		AF: 5 μm; AFM: 0.3 μm (95% filtered particle size)				
Outlet side oil mist concentration		Maximum 1.0 mg/m ³ (ANR) (approx. 0.8 ppm) ⁽³⁾				
Bowl material		Polycarbonate				
Bowl guard		Option	Standard			
Filter regulator construction		Relieving type				
Weight (kg)		0.74	0.88	0.95	1.76	1.83

- Note 1) Pressure gauge connection threads are not required for F.R.L. unit with a square embedded type pressure gauge (AC20C to AC40C).
 Note 2) Conditions: Inlet pressure: 0.7 MPa; Set pressure: 0.5 MPa. The rated flow varies depending on the inlet pressure.
 Note 3) At compressor discharge 30 mg/Nm³.

Attachment/Accessory Part No.

Description	Model	Part no.						
		AC20C	AC25C	AC30C	AC40C	AC40C-06		
Accessory	Pressure gauge ⁽¹⁾	1.0 MPa	Round type	G36-10-□01	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02
			Square embedded type ⁽²⁾	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS
	0.2 MPa	Round type	G36-2-□01	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02	
		Square embedded type ⁽²⁾	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	
Float type auto-drain ⁽³⁾	N.O.	—	AD38 AD38N ⁽⁶⁾	AD38 AD38N ⁽⁶⁾	AD48 AD48N ⁽⁶⁾	AD48 AD48N ⁽⁶⁾		
	N.C.	AD27	AD37 AD37N ⁽⁶⁾	AD37 AD37N ⁽⁶⁾	AD47 AD47N ⁽⁶⁾	AD47 AD47N ⁽⁶⁾		
Spacer		Y200	Y300	Y300	Y400	Y500		
Pressure switch ⁽⁵⁾		IS1000M-20	IS1000M-30	IS1000M-30	IS1000M-40	IS1000M-50		
T-interface ⁽⁴⁾ ⁽⁵⁾		Y210- □01 □02	Y310- □01 □02	Y310- □01 □02	Y410- □02 □03	Y510- □02 □03		
Residual pressure relief 3 port valve ⁽⁵⁾		VHS20- □01 □02	VHS30- □02 □03	VHS30- □02 □03	VHS40- □02 □03 □04	VHS40-□06		
Piping adapter ⁽⁵⁾		E200- □01 □02 □03	E300- □02 □03 □04	E300- □02 □03 □04	E400- □02 □03 □04 □06	E500-□06		
Pressure switch with piping adapter ⁽⁵⁾		IS1000E-20 □01 □02 □03	IS1000E-30 □02 □03 □04	IS1000E-30 □02 □03 □04	IS1000E-40 □02 □03 □04 □06	—		
Cross interface ⁽⁵⁾		Y24- □01 □02	Y34- □01 □02	Y34- □01 □02	Y44- □02 □03	Y54- □03 □04		

- Note 1) □ in part number for the round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 2) Includes one O-ring and 2 mounting screws.

Note 3) Minimum operating pressure: N.O. type-0.1 MPa; N.C. type-0.1 MPa (AD27), 0.15 MPa (AD37/47).

Note 4) For F.R.L. units, port sizes not in () are for standard application.


Note 5) Separate interfaces are required for modular unit.

Note 6) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D. should be ø3/8".


F.R.L. Unit Series AC20C to 40C

Dimensions

AC20C

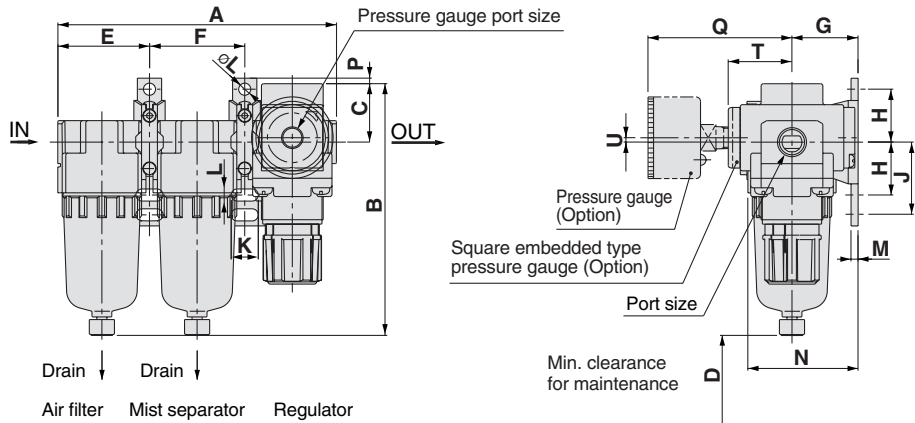

AC25C/30C/40C

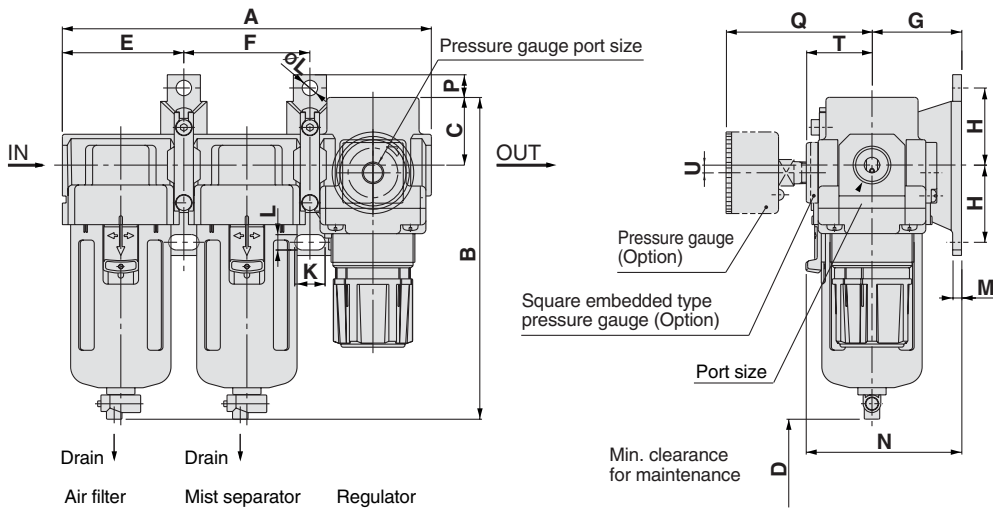

Applicable model	AC20C			AC25C, AC30C, AC40C, AC40C-06								
Optional specifications	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting					

(mm)

Model	Port size	Standard specifications														Accessory specifications				
		A	B	C	D	Bracket mounting size										With pressure gauge		With auto drain		
						E	F	G	H	J	K	L	øL	M	N	P	Q	T	U	B
AC20C	1/8, 1/4	126	114	26.5	45	41.5	43	30	24	33	12	5.5	5.5	3.2	50	2.5	65	29.5	2 ⁽¹⁾	132
AC25C	1/4, 3/8	167	143	28	50	55	57	41	35	—	14	7	7	4	71	13	64	28.5	0	184
AC30C	1/4, 3/8	167	146	31	50	55	57	41	35	—	14	7	7	4	71	10	66	30.5	3.5	187
AC40C	1/4, 3/8, 1/2	220	183	36	75	72.5	75	50	40	—	18	9	9	4	88	12	74	35	3.5	222
AC40C-06	3/4	235	185	36	75	77.5	80	50	40	—	18	9	9	4.6	88	12	74	35	3	224


Model	Optional specifications ⁽²⁾			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AC20C	—	—	114	—
AC25C	151	150	156	176
AC30C	154	153	159	179
AC40C	191	190	196	216
AC40C-06	193	192	198	218

Note 1) For AC20 only, the position of the pressure gauge is above the center of the piping.
 Note 2) For optional specifications (with barb fitting, with drain guide, with metal bowl, or with level gauge), the total length (dimension for B) will vary.

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE □
- VY1
- G
- PPA
- AL


F.R.L. Unit Filter Regulator + Mist Separator

Series AC20D to 40D

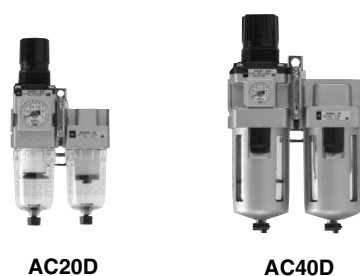

P. 14-2-31

JIS Symbol



Filter regulator Mist separator

Standard Specifications

Model		AC20D	AC30D	AC40D	AC40D-06
Component	Filter regulator	AW20	AW30	AW40	AW40-06
	Mist separator	AFM20	AFM30	AFM40	AFM40-06
Port size		1/8	1/4	1/4	3/4
		1/4	3/8	3/8 1/2	
Pressure gauge port size ⁽¹⁾		1/8	1/8	1/4	1/4
Fluid	Air				
Proof pressure	1.5 MPa				
Maximum operating pressure	1.0 MPa				
Minimum operating pressure	0.05 MPa				
Set pressure range	0.05 to 0.85 MPa				
Rated flow (ℓ/min (ANR)) ⁽²⁾		150	330	800	800
Relief pressure	Set pressure + 0.05 MPa (at relief flow rate of 0.1 ℓ/min (ANR))				
Ambient and fluid temperature	-5 to 60°C (With no freezing)				
Nominal filtration rating	AW: 5 μm; AFM: 0.3 μm (95% filtered particle size)				
Outlet side oil mist concentration	Maximum 1.0 mg/m ³ (ANR) (approx. 0.8 ppm) ⁽³⁾				
Bowl material	Polycarbonate				
Bowl guard	Option			Standard	
Filter regulator construction	Relieving type				
Weight (kg)		0.57	0.74	1.38	1.43

Note 1) Pressure gauge connection threads are not required for F.R.L. unit with a square embedded type pressure gauge (AC20D to AC40D).

Note 2) Conditions: Inlet pressure: 0.7 MPa; Set pressure: 0.5 MPa. The rated flow varies depending on the inlet pressure.

Note 3) At compressor discharge of 30 mg/Nm³.

Attachment/Accessory Part No.

Description	Model	Part no.							
		AC20D		AC30D		AC40D		AC40D-06	
Accessory	Pressure gauge ⁽¹⁾	1.0 MPa	Round type	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02		
			Square embedded type ⁽²⁾	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS		
	0.2 MPa	Round type	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02			
		Square embedded type ⁽²⁾	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS			
Float type auto-drain ⁽³⁾	N.O.	—	AD38	AD38N ⁽⁶⁾	AD48	AD48N ⁽⁶⁾	AD48	AD48N ⁽⁶⁾	
	N.C.	AD27	AD37	AD37N ⁽⁶⁾	AD47	AD47N ⁽⁶⁾	AD47	AD47N ⁽⁶⁾	
Spacer		Y200	Y300	Y400	Y500				
Pressure switch ⁽⁵⁾		IS1000M-20	IS1000M-30	IS1000M-40	IS1000M-50				
T-Interface ⁽⁴⁾ ⁽⁵⁾		Y210- ^{□01} □02	Y310- ^{□01} □02	Y410- ^{□02} □03	Y510- ^{□02} □03				
Residual pressure relief 3 port valve ⁽⁵⁾		VHS20- ^{□01} □02	VHS30- ^{□02} □03	VHS40- ^{□02} □03 □04	VHS40-□06				
Piping adapter ⁽⁵⁾		E200- ^{□01} □02 □03	E300- ^{□02} □03 □04	E400- ^{□02} □03 □04 □06	E500-□06				
Pressure switch with piping adapter ⁽⁵⁾		IS1000E-20 ^{□01} □02 □03	IS1000E-30 ^{□02} □03 □04	IS1000E-40 ^{□02} □03 □04 □06	—				
Cross interface ⁽⁵⁾		Y24- ^{□01} □02	Y34- ^{□01} □02	Y44- ^{□02} □03	Y54- ^{□03} □04				

Note 1) □ in part number for the round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 2) Includes one O-ring and 2 mounting screws.

Note 3) Minimum operating pressure: N.O. type—0.1 MPa; N.C. type—0.1 MPa (AD27), 0.15 MPa (AD37/47).

Note 4) For F.R.L. units, port sizes not in () are for standard application.



Note 5) Separate interfaces are required for modular unit.

Note 6) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".



F.R.L. Unit Series AC20D to 40D

Dimensions

AC20D

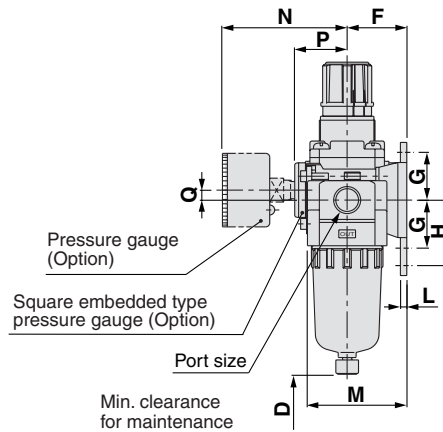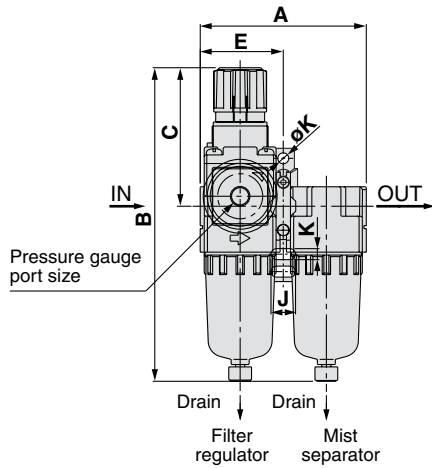

AC30D/40D

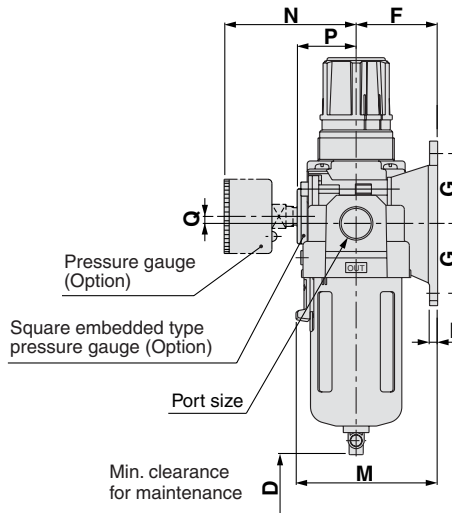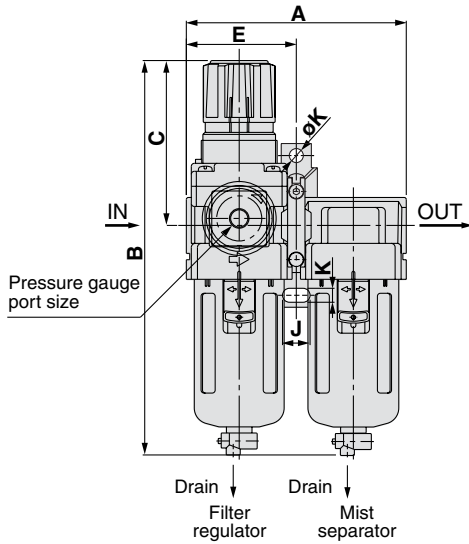

Applicable model	AC20D			AC30D, AC40D, AC40D-06			
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications							

(mm)

Model	Port size	Standard specifications													Accessory specifications			
		A	B	C	D	Bracket mounting size								With pressure gauge		With auto-drain		
						E	F	G	H	J	K	øK	L	M	N	P	Q	B
AC20D	1/8, 1/4	83	160	73	45	41.5	30	24	33	12	5.5	5.5	3.2	50	63	27	5	177
AC30D	1/4, 3/8	110	201	86	55	55	41	35	—	14	7	7	4	71	66	30.5	3.5	242
AC40D	1/4, 3/8, 1/2	145	239	92	80	72.5	50	40	—	18	9	9	4	88	76	38.5	1.5	278
AC40D-06	3/4	155	242	93	80	77.5	50	40	—	18	9	9	4.6	88	76	38.5	1.2	278

Model	Optional specifications ^{Note)}			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AC20D	—	—	160	—
AC30D	209	208	214	234
AC40D	247	246	251	272
AC40D-06	250	249	255	275

Note) For optional specifications (with barb fitting, with drain guide, with metal bowl, or with level gauge), the total length (dimension for B) will vary.


- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL

F.R.L. Unit *Series AC*

Attachment Specifications

Piping Adapter (E): M5 x 0.8, 1/8, 1/4, 3/8, 1/2, 3/4, 1

A piping adapter allows installation/removal of the component without removing the piping and thus makes maintenance easier.

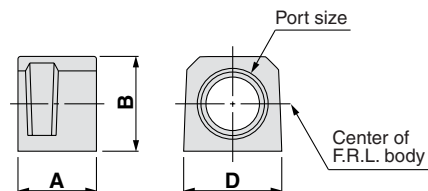

(mm)

Model ^{Note)}	Port size	A	B	D	Applicable model
E100-M5	M5 x 0.8	10	14	14	AC10□, AW10, AF10, AR10, AL10
E200-□01	1/8	30	23.5	28	AC20□
E200-□02	1/4				AF20, AR20□, AW20□
E200-□03	3/8				AL20, AFM20, AFD20, AWM20, AWD20
E300-□02	1/4	32	30	30	AC25□, AC30□
E300-□03	3/8				AF30, AR30□, AW30□
E300-□04	1/2				AL30, AFM30, AFD30, AWM30, AWD30
E400-□02	1/4	32	36	36	AC40□
E400-□03	3/8				AF40, AR40□, AW40□
E400-□04	1/2				AL40, AFM40, AFD40
E400-□06	3/4				AWM40, AWD40
E500-□06	3/4	32	40	44	AC40□-06, AF40-06, AR40□-06, AW40□-06
					AL40-06, AFM40-06, AFD40-06
E600-□06	3/4	35	48	53	AC50, AC55, AC60, AC50B, AC55B, AC60B
E600-□10	1				AF50, AR50□, AL50, AF60, AR60□, AL60



Note) • □ in model numbers indicates a thread type. No indication is necessary for Rc; however, indicate N for NPT, and F for G.

• Separate interfaces are required for modular unit.

* Factory mounting of a piping adapter on the AC models is available as a special order.

T-interface (T): M5 x 0.8, 1/8, 1/4, 3/8, 1/2

Using a T-interface facilitates the redirection of air flow.

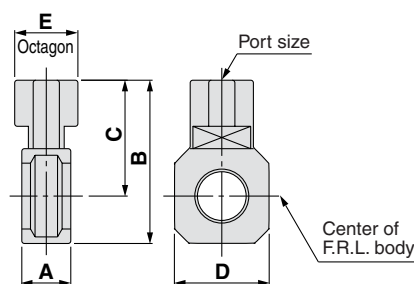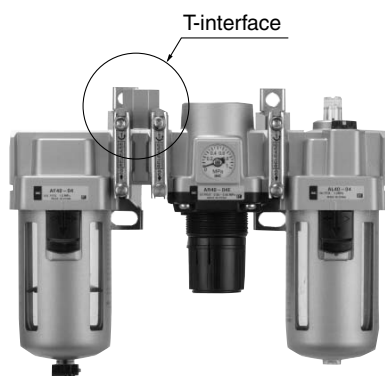

(mm)

Model	Port size	A	B	C	D	E	Applicable model
Y110-M5	M5 x 0.8	11	19	12	14	8	AC10, AC10B
Y210-□01	1/8	15	42	32	28	19	AC20, AC20B
Y210-□02	1/4						AC20C
Y310-□01	1/8	15	53	39	30	19	AC25, AC25B
Y310-□02	1/4						AC25C, AC30
							AC30B, AC30C
Y410-□02	1/4	19	62	44	36	24	AC40, AC40B
Y410-□03	3/8						AC40C
Y510-□02	1/4	19	66	46	44	24	AC40-06, AC40B-06
Y510-□03	3/8						AC40C-06
Y610-□03	3/8	22	81	57	53	30	AC50, AC55
Y610-□04	1/2						AC60, AC50B
							AC55B, AC60B



Note) • □ in model numbers indicates a thread type. No indication is necessary for Rc; however, indicate N for NPT, and F for G.

• Separate interfaces are required for modular unit.

* Refer to the attachment table on "Front matter 2" for standard port sizes when using with AC.

Caution on Mounting

- If a T-interface is used on the IN side of the lubricator, lubricant may be mixed. Use the Series AKM check valve to avoid such possibility.

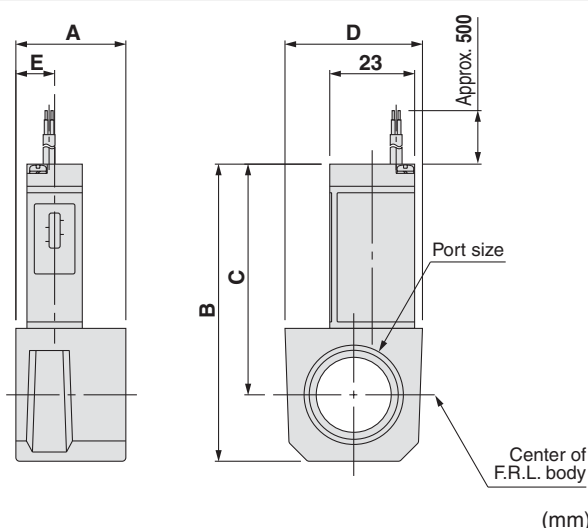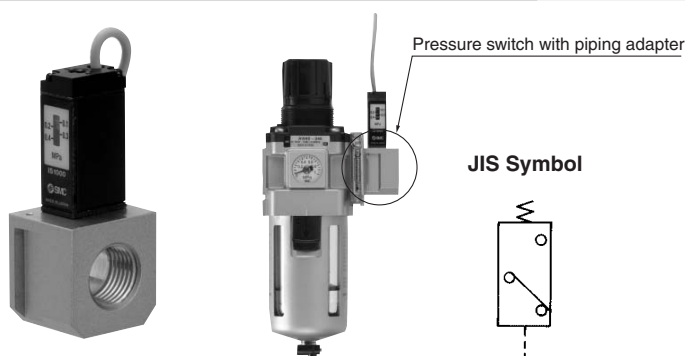Pressure Switch with Piping Adapter (P)**Specifications**

Fluid	Air
Proof pressure	1.0 MPa
Maximum operating pressure	0.7 MPa
Set pressure range (When OFF)	0.1 to 0.4 MPa
Differential	0.08 MPa
Ambient and fluid temperature	-5 to 60°C (With no freezing)

Switch characteristics

Contact point configuration	1a
Maximum contact point capacity	2 VA(AC), 2 W(DC)
Operating voltage: AC, DC	100 V or less
Maximum operating current	12 V to 24 VAC, DC: 50 mA 48 VAC, DC: 40 mA 100 VAC, DC: 20 mA

Model ⁽¹⁾	Port size	A	B	C	D	E	Applicable model
IS1000E-20□01	1/8	30	68	57	28	16	AC20□
IS1000E-20□02	1/4						AR20□, AW20□
IS1000E-20□03	3/8						AWM20, AWD20
IS1000E-30□02	1/4	32	74.5	60.5	30	13	AC25□, AC30□
IS1000E-30□03	3/8						AR25□, AR30□, AW30□
IS1000E-30□04	1/2						AWM30, AWD30
IS1000E-40□02	1/4						32
IS1000E-40□03	3/8	AR40□, AW40□					
IS1000E-40□04	1/2	AWM40, AWD40					
IS1000E-40□06	3/4						



Note 1) □ in the model numbers indicates a thread type. No indication is necessary for Rc; however, indicate N for NPT, and F for G.
Note 2) A pressure switch cannot be mounted on AC40□-06 and AW40□-06.

* Separate interfaces are required for modular unit.

** The pressure switch on AC40□-06 and above and AW40□-06 can be mounted by screwing IS1000-01 into the piping adapter E500-□06-X501 or E600-□06-X501 to E600-□06 to 10-X501 (with top-face thread Rc 1/8). Products with a premounted switch are available as a special order. Please contact SMC regarding their availability.

How to Order

IS1000E-30□03□□

Pressure switch with piping adapter

Body size

20	For AC20
30	For AC25, AC30
40	For AC40-02 to 04

Thread type

Nil	Rc
N	NPT
F	G

Option

X201	Lead wire length: 3 m
X202	Regulating pressure range: 0.1 to 0.6 MPa
X207	MPa/PSI Dual scale
X215	Lead wire length: 3 m; Regulating pressure range: 0.1 to 0.6 MPa
X250	Opposite-side mounting (Left-side mounting style)
X251	Lead wire length: 3 m; Opposite-side mounting (Left-side mounting style)
X252	Set pressure range: 0.1 to 0.6 MPa; Opposite-side mounting (Left-side mounting style)
X253	Lead wire length: 3 m; Regulating pressure range: 0.1 to 0.6 MPa; Opposite-side mounting (Left-side mounting style)

This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Piping adapter port size

Symbol	Port size	Body size		
		20	30	40
01	1/8	●	—	—
02	1/4	●	●	●
03	3/8	●	●	●
04	1/2	—	●	●
06	3/4	—	—	●

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G


PPA

AL

Series AC

Check Valve (K): Rc1/8, 1/4, 3/8

A check valve with intermediate air release port can be easily installed to prevent a back flow of lubricant when redirecting the air flow and releasing the air on the outlet side of the regulator.

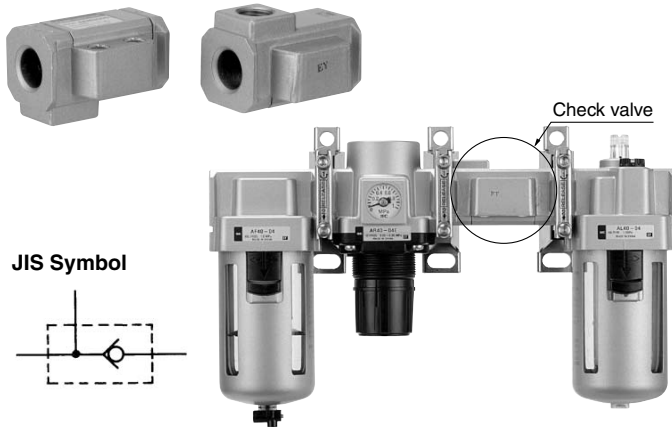

Specifications

Model	Effective area (mm ²)
AKM2000	28
AKM3000	55
AKM4000	111

Be sure to use above check valves when redirecting the air flow on the inlet side of the lubricator. Threads for IN and OUT ports are not machined.

How to Order

AKM 30 00 - 01

Check valve
Body size


20	30	40
----	----	----

Bypass port size for redirecting air flow

Symbol	Port size	Body size		
		20	30	40
01	1/8	●	●	—
02	1/4	●	●	●
03	3/8	—	—	●

Thread type

Nil	Rc
N	NPT
F	G

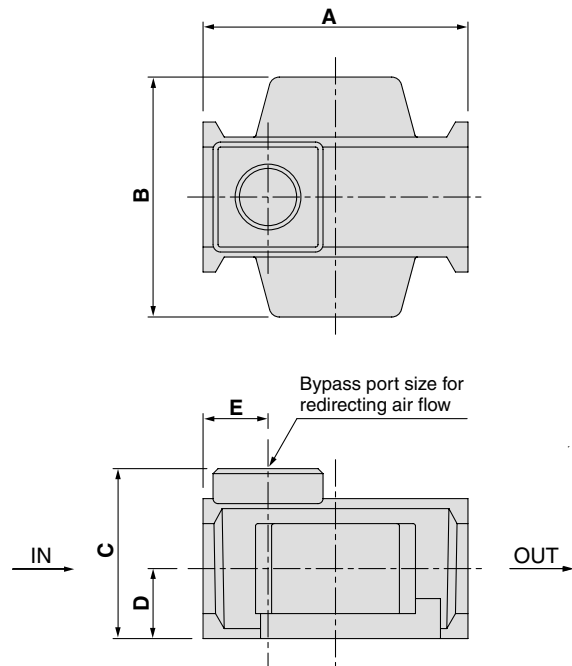

(mm)

Model	Bypass port size	A	B	C	D	E	Applicable model
AKM2000	1/8, 1/4	40	40	28	11	11	AC20, AC20A
AKM3000	1/8, 1/4	53	48	34	14	13	AC25, AC25A AC30, AC30A
AKM4000	1/4, 3/8	70	54	42	18	15	AC40, AC40A (Note)

Note) Not applicable to AC40□-06.

* Refer to the attachment table on page 14-2-12 or 14-2-16 for standard bypass port sizes applicable to AC.

Pressure Switch (S)

A compact integrated pressure switch can be easily installed and facilitates the pressure detection of the line.




Specifications

Fluid	Air
Proof pressure	1.0 MPa
Maximum operating pressure	0.7 MPa
Set pressure range (Off)	0.1 to 0.4 MPa
Differential	0.08 MPa
Ambient and fluid temperature	-5 to 60°C (With no freezing)

Switch Characteristics


Contact point configuration	1a
Maximum contact point capacity	2 VA(AC), 2 W(DC)
Operating voltage: AC, DC	100 V or less
Maximum operating current	12 V to 24 VAC, DC : 50 mA 48 VAC, DC : 40 mA 100 VAC, DC : 20 mA

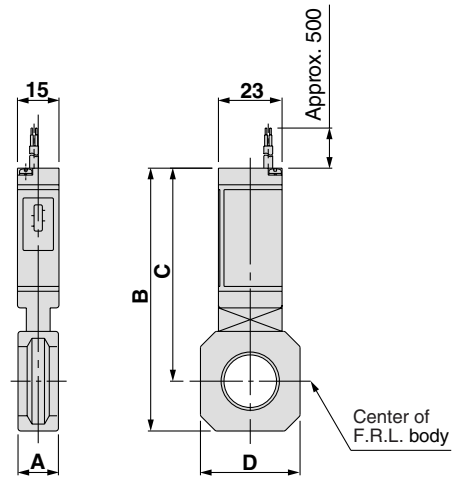

Model	A	B	C	D	Applicable model
IS1000M-20	11	76	66	28	AC20□
IS1000M-30	13	86	72	30	AC25□, AC30□
IS1000M-40	15	95	77	36	AC40□
IS1000M-50	17	99	79	44	AC40□-06
IS1000M-60	22	92.5	68.5	53	AC50□, AC55B, AC60□

Note) Separate interfaces are required for modular unit.

How to Order



Body size	For
20	For AC20
30	For AC25, AC30
40	For AC40-02 to 04
50	For AC40-06
60	For AC50, AC55, AC60



Accessory	Description
X201	Lead wire length: 3 m
X202	Regulating pressure range: 0.1 to 0.6 MPa
X207	MPa/PSI dual scale
X215	Lead wire length: 3 m; Regulating pressure range: 0.1 to 0.6 MPa

This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Cross Interface (C): M5 x 0.8, 1/8, 1/4, 3/8, 1/2

Pipings are possible in all 4 directions.

IN/OUT ports are not machined for threads. Please contact SMC if threaded (machined) ports are required.

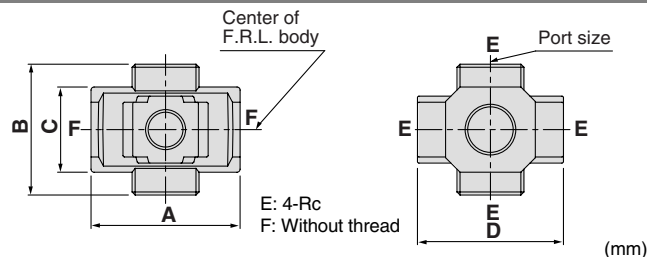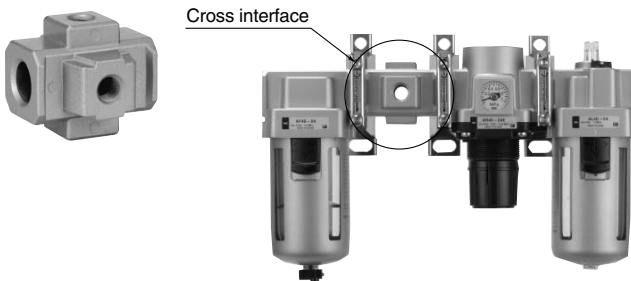

Model	Port size	A	B	C	D	Applicable model
Y14-M5	M5	23	16	14	25	AC10□
Y24-□01	1/8	40	40	22	40	AC20□
Y24-□02	1/4					
Y34-□01	1/8	49	43	28	48	AC25□, AC30□
Y34-□02	1/4					
Y44-□02	1/4	60	48	36	54	AC40□
Y44-□03	3/8					
Y54-□03	3/8	72	62	40	62	AC40□-06
Y54-□04	1/2					

Note) □ in the model numbers indicates a thread type. No indication is necessary for Rc; however, indicate N for NPT, and F for G.
• If threaded ports are required, they are available as a special order. Please contact SMC.

Caution on Mounting


- When mounting a cross interface directly on the IN side of the lubricator, be sure to use a Series AKM check valve between the lubricator and cross interface.
- Factory mounting of a cross interface on the AC model is available as a special order.

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL

Series AC

Residual Pressure Relief 3 Port Valve (V)


With the use of a 3 port valve for residual pressure release, pressure left in the line can be easily exhausted.

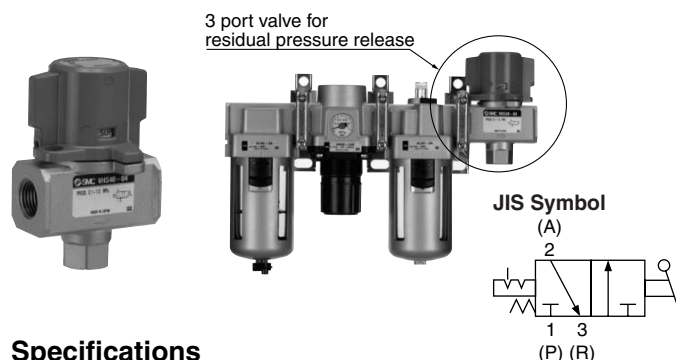

Specifications

Model	Port size		Effective area (mm ²) (): Effective Area mm ² (Cv)	
	IN, OUT	EXH	IN to OUT	OUT to EXH
VHS20	1/8	1/8	10 (0.54)	11 (0.60)
	1/4		14 (0.76)	16 (0.87)
VHS30	1/4	1/4	16 (0.87)	14 (0.76)
	3/8		31 (1.68)	29 (1.57)
VHS40	1/4	3/8	27 (1.46)	36 (1.95)
	3/8		38 (2.06)	40 (2.17)
	1/2		55 (2.98)	42 (2.28)
VHS40-06	3/4	1/2	77 (1.73)	49 (2.66)
VHS50	3/4	1/2	82 (4.44)	50 (2.71)
	1		125 (6.78)	53 (2.87)

* Paint color (Standard) Handle: Red, Body: Platinum silver
** Use an air filter on the IN side for operating protection.

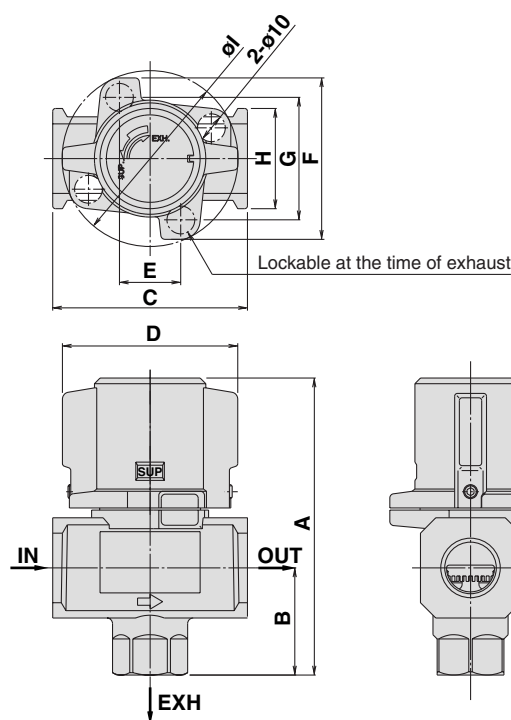

(mm)

Model	A	B	C	D	E	F	G	H	I
VHS20	59	20	40	34	—	45	33	28	45
VHS30	78	29	53	46	—	55	42	30	55
VHS40	107	39	70	63	22	58	44	36	63
VHS40-06	110	42	75	67	21	65	50	44	69
VHS50	134	53	90	78	26	76	61	54	81

How to Order

VHS 30-F 03-RZ

Residual pressure relief 3 port valve

Body size

Symbol	Applicable model
20	AC20
30	AC25/30
40	AC40
50	AC50, AC60 (Note)

Note) When the valve is mounted on AC60, the flow rate may decrease depending upon the mounting position.

Thread type

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Body size			
		20	30	40	50
01	1/8	●	—	—	—
02	1/4	●	●	●	—
03	3/8	—	●	●	—
04	1/2	—	—	●	—
06	3/4	—	—	●	●
10	1	—	—	—	●

Option

Code	Description
R	Flow direction: Right → Left
Z ^{Note)}	Name plate in imperial units (PSI, °F)

Note) This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Caution

1. Please consult with SMC when a pressure switch and T type spacer are installed on the outlet of pressure release valve.
2. If a stop valve or a silencer is connected to the exhaust port of VHS20/30, the effective sectional area should be larger than the figure indicated in the following table, to prevent malfunction caused by back pressure. (This is not applicable to VHS40 and VHS50)

Model	Effective area (mm ²)
VHS20	5
VHS30	5

Spacers and Brackets *Series AC*

Accessory Dimensions


Spacer (X)



Y200



Y400

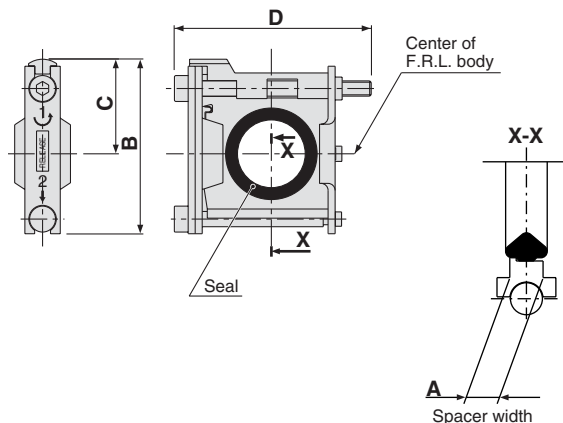

Model	A	B	C	D	Applicable model
Y100	6	27	15	33	AC10, AC10A, AC10B
Y200	3	35.5	18.5	48	AC20□
Y300	4	47	26	59	AC25□, AC30□
Y400	5	57	31	65	AC40□
Y500	5	61	33	70	AC40□-06
Y600	6	75.5	41	86	AC50, AC55, AC60 AC50B, AC55B, AC60B

(mm)

Replacement Parts

Description	Material	Part no.					
		Y100	Y200	Y300	Y400	Y500	Y600
Seal	HNBR ⁽²⁾	Y100P-060AS ⁽¹⁾	Y200P-060S	Y300P-060S	Y400P-060S	Y500P-060S	Y600P-060S

Note 1) Y-100 comes with 2 O-rings.

Note 2) NBR seal is used for Y100 spacer because of no direct contact with fluid.


Spacer with Bracket (Z)



Y200T



Y400T

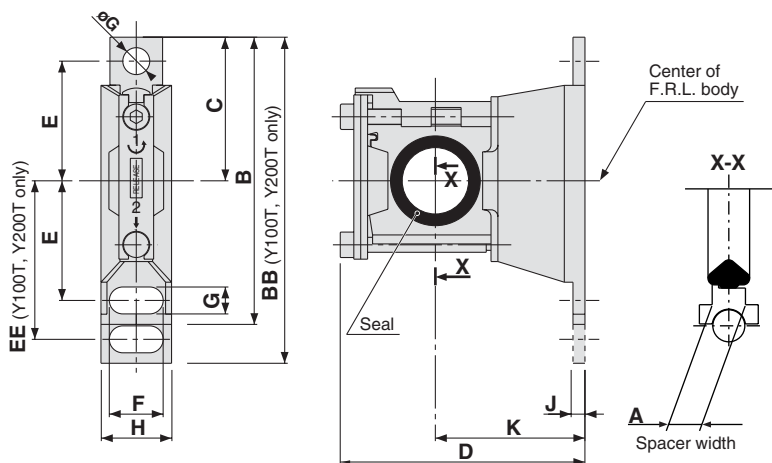

(mm)

Model	A	B	BB	C	D	E	EE	F	G	øG	H	J	K	Applicable model
Y100T	6	—	56	24.5	40.5	20	27	6.8	4.5	4.5	14	2.8	25	AC10□
Y200T	3	—	67	29	53	24	33	12	5.5	5.5	19	3.2	30	AC20□
Y300T	4	82	—	41	68	35	—	14	7	7	21	4	41	AC25□, AC30□
Y400T	5	96	—	48	81.5	40	—	18	9	9	26	4	50	AC40□
Y500T	5	96	—	48	86	40	—	18	9	9	27	4.6	50	AC40□-06
Y600T	6	120	—	60	112	50	—	20	11	11	31	6.4	70	AC50, AC55, AC60, AC50B, AC55B, AC60B

Replacement Parts

Description	Material	Part no.					
		Y100T	Y200T	Y300T	Y400T	Y500T	Y600T
Seal	HNBR ⁽²⁾	Y100P-060AS ⁽¹⁾	Y200P-060S	Y300P-060S	Y400P-060S	Y500P-060S	Y600P-060S

Note 1) Y-100T comes with 2 O-rings.

Note 2) NBR seal is used for Y100T spacer because of no direct contact with fluid.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1


G

PPA

AL

Series AC

Mounting Position for Spacer with Bracket

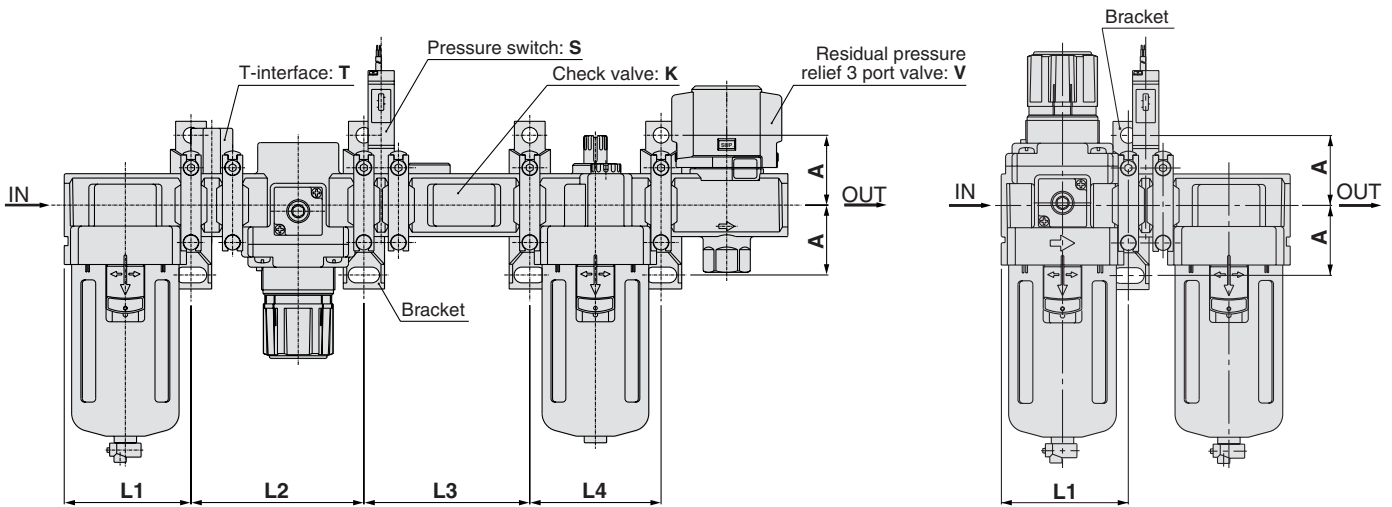

(mm)

Attachment Model	K			S		T		V			KS			KT			KV				KST		
	L1	L2	L3	L1	L2	L1	L2	L1	L2	L3	L1	L2	L3	L1	L2	L3	L1	L2	L3	L4	L1	L2	L3
AC10	—	—	—	—	—	28	48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
AC20	41.5	43	43	41.5	43	41.5	61	41.5	43	43	41.5	43	57	41.5	61	43	41.5	43	43	43	41.5	61	57
AC25	55	57	57	55	57	55	76	55	57	57	55	57	74	55	76	57	55	57	57	57	55	76	74
AC30	55	57	57	55	57	55	76	55	57	57	55	57	74	55	76	57	55	57	57	57	55	76	74
AC40	72.5	75	75	72.5	75	72.5	99	72.5	75	75	72.5	75	95	72.5	99	75	72.5	75	75	75	72.5	99	95
AC40-06	—	—	—	77.5	80	77.5	104	77.5	80	80	—	—	—	—	—	—	—	—	—	—	—	—	—
AC50	—	—	—	93	96	93	124	93	96	96	—	—	—	—	—	—	—	—	—	—	—	—	—
AC55	—	—	—	98	96	98	124	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
AC60	—	—	—	98	101	98	129	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Attachment Model	KSV				KTV				KSTV				ST		SV			STV			TV		
	L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L3	L4	L1	L2	L1	L2	L3	L1	L2	L3	L1	L2	L3
AC10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
AC20	41.5	43	57	43	41.5	61	43	43	41.5	61	57	43	41.5	61	41.5	43	57	41.5	61	57	41.5	61	43
AC25	55	57	74	57	55	76	57	57	55	76	74	57	55	76	55	57	74	55	76	74	55	76	57
AC30	55	57	74	57	55	76	57	57	55	76	74	57	55	76	55	57	74	55	76	74	55	76	57
AC40	72.5	75	95	75	72.5	99	75	75	72.5	99	95	75	72.5	99	72.5	75	95	72.5	99	95	72.5	99	75
AC40-06	—	—	—	—	—	—	—	—	—	—	—	—	77.5	104	77.5	80	102	77.5	104	102	77.5	104	80
AC50	—	—	—	—	—	—	—	—	—	—	—	—	93	124	93	96	124	93	124	124	93	124	96
AC55	—	—	—	—	—	—	—	—	—	—	—	—	98	124	—	—	—	—	—	—	—	—	—
AC60	—	—	—	—	—	—	—	—	—	—	—	—	98	129	—	—	—	—	—	—	—	—	—

Attachment Model	K		S		V		KS		KV			KSV			SV	
	L1	L2	L1	L2	L1	L2	L1	L2	L1	L2	L3	L1	L2	L3	L1	L2
AC20A	41.5	43	41.5	41.5	43	41.5	57	41.5	43	43	41.5	57	43	41.5	57	
AC30A	55	57	55	55	57	55	74	55	57	55	57	55	74	55	74	
AC40A	72.5	75	72.5	72.5	75	72.5	95	72.5	75	75	72.5	95	75	72.5	95	
AC40A-06	—	—	77.5	77.5	80	—	—	—	—	—	—	—	—	77.5	102	

Attachment Model	S	T	V		SV		TV	
	L1	L1	L1	L2	L1	L2	L1	L2
AC10B	—	28	—	—	—	—	—	—
AC20B	41.5	41.5	41.5	43	41.5	57	41.5	61
AC25B	55	55	55	57	55	74	55	76
AC30B	55	55	55	57	55	74	55	76
AC40B	72.5	72.5	72.5	75	72.5	95	72.5	99
AC40B-06	77.5	77.5	77.5	80	77.5	102	77.5	104
AC50B	93	93	93	96	93	124	93	124
AC55B	98	98	—	—	—	—	—	—
AC60B	98	98	—	—	—	—	—	—

Attachment Model	S		T		V			SV			TV		
	L1	L2	L1	L2	L1	L2	L3	L1	L2	L3	L1	L2	L3
AC20C	41.5	43	41.5	43	41.5	43	43	41.5	43	57	41.5	43	61
AC25C	55	57	55	57	55	57	57	55	57	74	55	57	76
AC30C	55	57	55	57	55	57	57	55	57	74	55	57	76
AC40C	72.5	75	72.5	75	72.5	75	75	72.5	75	95	72.5	75	99
AC40C-06	77.5	80	77.5	80	77.5	80	80	77.5	80	102	77.5	80	104

Attachment Model	S	V		SV	
	L1	L1	L2	L1	L2
AC20D	41.5	41.5	43	41.5	57
AC30D	55	55	57	55	74
AC40D	72.5	72.5	75	72.5	95
AC40D-06	77.5	77.5	80	77.5	102

L1: Dimensions from the end of the IN side to the center of the mounting hole for the first bracket.
 L2: Mounting hole pitch between the first and the second bracket.
 L3: Mounting hole pitch between the second and the third bracket.
 L4: Mounting hole pitch between the third and the fourth bracket.
 Refer to dimensions pages for dimension A from the center of the piping and the mounting hole.



F.R.L. Unit *Series AC20 to 60*

Made to Order Specifications:

Please contact SMC for detailed dimensions, specifications, and lead times.

With Digital Pressure Switch

AC20 to 60 with a digital pressure switch (Model: ISE30-□□-□□-□L) can be ordered. A digital pressure switch is mounted on the connection threads for the pressure gauge of the regulator or the filter regulator.



Specifications

Part no.		-X465
Pressure switch	Model	ISE30-□□-□□-□L
	Set pressure range	-0.1 to 1 MPa
	Set/Display resolution	0.001 MPa
	Power supply voltage	12 to 24 VDC ±10%, Ripple (p-p) 10% or less (With reverse connection protection)
	Current consumption	45 mA or less (70 mA or less during current output)

* Pressure gauge port size: Rc 1/8

Applicable Model

Model	AC20□	AC25□	AC30□	AC40□	AC40□-06	AC50□	AC55□	AC60□
Port size	1/8	1/4	1/4	1/4	3/4	3/4	1	1
	1/4	3/8	3/8	1/2		1		

How to Order → Refer to the next page.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

How to Order

AC 30 A — F 03 D — KV — 12R — X465 A

F.R.L. unit

Body size

20	25	30	40	50	55	60
----	----	----	----	----	----	----

Model combination

Symbol	Combination				
	Air filter	Regulator	Lubricator	Filter Regulator	Mist Separator
Nil	(1)	(2)	(3)	—	—
A	—	—	(2)	(1)	—
B	(1)	(2)	—	—	—
C	(1)	(3)	—	—	(2)
D	—	—	—	(1)	(2)

Note 1) The circled numbers indicate the order in which the units are assembled.

Thread type

Nil	Rc
N ⁽²⁾	NPT
F ⁽³⁾	G

Note 2) Drain guide is NPT 1/4 (applicable to AC25 to 60), and the exhaust port for auto-drain comes with $\phi 3/8"$ One-touch fitting (applicable to AC25 to 60).

Note 3) Drain guide is G 1/4 (applicable to AC25 to 60).

Port size

Symbol	Port size	Body size						
		20	25	30	40	50	55	60
01	1/8	●	—	—	—	—	—	—
02	1/4	●	●	●	●	—	—	—
03	3/8	—	●	●	●	—	—	—
04	1/2	—	—	—	●	—	—	—
06	3/4	—	—	—	●	●	—	—
10	1	—	—	—	—	●	●	●

Accessory

Symbol	Description	Applicable model
Nil	—	—
C	With float type auto-drain (N.C.) ⁽⁴⁾	AC20□ to 60□
D	With float type auto-drain (N.O.) ⁽⁴⁾	AC25□ to 60□

Note 4) Applicable tubing O.D for auto drain connection should be $\phi 3/8"$ in case NPT thread port is chosen.

Note 13) Please consult with SMC for detailed dimensions and available attachments and options.

Note 14) Refer to SMC catalog CAT.ES100-42 for detailed specifications and instructions of digital pressure switch.

Switch specifications

Symbol	Output specifications
A	NPN output
B	PNP output
C	1 to 5 V output
D	4 to 20 mA output

With digital pressure switch (Series ISE30)⁽¹²⁾

Note 12) Digital pressure switch is not mounted and is supplied loose at the time of shipment.

Description

Symbol	Description	Applicable model
1 ⁽⁹⁾	0.02 to 0.2 MPa setting	AC20□ to 60□
2	Metal bowl	AC20□ to 60□
3	Lubricator with drain cock	AC20□ to 60□
6	Nylon bowl (Including sight dome)	AC20□ to 60□
8	Metal bowl with level gauge	AC25□ to 60□
C	With bowl guard	AC20□
J ⁽¹⁰⁾	Drain guide 1/4	AC25□ to 60□
N	Non-relieving type	AC20□ to 60□
R	Flow direction: Right → Left	AC20□ to 60□
W	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	AC25□ to 60□
Z ⁽¹¹⁾	Name plate and caution plate for bowl in imperial units (PSI, °F)	AC20□ to 60□

* When more than one specification is required, indicate in ascending alphanumeric order.

Note 9) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 10) Without a valve function.

Note 11) For thread type NPT.

This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Attachment

Symbol	Description	Attachment mounting position	Applicable model	Port size for intermediate air release
Nil	None	—	—	—
K	Check valve	AF + AR + [K] + AL	AC20 to 40	AC20□: 1/8 AC25□: 1/4 AC30□: 1/4 AC40□: 3/8
		AW + [K] + AL	AC20A to 40A	
T	T-interface	AF + [T] + AR + AL	AC20 to 60	AC20□: 1/8 AC25□: 1/4 AC30□: 1/4 AC40□: 3/8 AC50□: 3/8 AC55□: 1/2 AC60□: 1/2
		AF + [T] + AR	AC20B to 60B	
		AF + AFM + [T] + AR	AC20C to 40C	
V	Residual pressure relief 3 port valve	AF + AR + AL + [V]	AC20 to 50	—
		AW + AL + [V]	AC20A to 40A	
		AF + AR + [V]	AC20B to 50B	
		AF + AFM + AR + [V]	AC20C to 40C	
V1 ⁽⁸⁾	Residual pressure relief 3 port valve	AW + AFM + [V]	AC20D to 40D	—
		[V] + AF + AR□K	AC20B to 50B	
		[V] + AF + AFM + AR□K	AC20C to 40C	
		[V] + AW□K + AFM	AC20D to 40D	

Note 5) When more than one attachment is required, order in alphabetical order.




Note 6) Piping adapter, pressure switch with piping adapter, and cross interface need to be ordered separately.

Note 7) The bracket position varies depending on the T-interface mounting.

Refer to the table on page 14-2-30 for standard bracket position.

Note 8) With this combination, regulators and filter regulators will be "With back flow function" type. For safety, check that the exhausted and is atmospheric pressure by pressure gauge.

Modular Style Air Filter *Series AF*

Air filter Series AF  Pages 14-2-34 to 14-2-39	Model	Port size	Filtration (μm)	Accessory
	AF10	M5 x 0.8	5	Bracket Float type auto-drain
	AF20	1/8, 1/4		
	AF30	1/4, 3/8		
	AF40	1/4, 3/8, 1/2		
	AF40-06	3/4		
	AF50	3/4, 1		
	AF60	1		
Mist separator Series AFM  Pages 14-2-40 to 14-2-42	AFM20	1/8, 1/4	0.3	Bracket Float type auto-drain
	AFM30	1/4, 3/8		
	AFM40	1/4, 3/8, 1/2		
	AFM40-06	3/4		
Micro mist separator Series AFD  Pages 14-2-43 to 14-2-45	AFD20	1/8, 1/4	0.01	Bracket Float type auto-drain
	AFD30	1/4, 3/8		
	AFD40	1/4, 3/8, 1/2		
	AFD40-06	3/4		

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Air Filter

Series AF10 to 60

How to Order

AF 30 - F 03 BD - 2R

Air filter Accessory Option

Body size

10	20	30	40	50	60
----	----	----	----	----	----

Thread type

Nil	Metric thread (M5)
N (1)	Rc
F (2)	NPT
	G

Port size

Symbol	Port size	Body size					
		10	20	30	40	50	60
M5	M5	●	—	—	—	—	—
01	1/8	—	●	—	—	—	—
02	1/4	—	●	●	—	—	—
03	3/8	—	—	●	●	—	—
04	1/2	—	—	—	●	—	—
06	3/4	—	—	—	●	●	—
10	1	—	—	—	—	●	●

Accessory

Symbol	Description	Applicable model
Nil	—	—
B (3)	With bracket	AF20 to 60
C	Float type (4) auto-drain (N.C.)	AF10 to 60
D	Float type (4) auto-drain (N.O.)	AF30 to 60

Option

Symbol	Description	Applicable model
2	Metal bowl	AF10 to 60
6	Nylon bowl	AF10 to 60
8	Metal bowl with level gauge	AF30 to 60
C	With bowl guard	AF20
J (5)	Drain guide 1/4	AF30 to 60
R	Flow direction: Right → Left	AF10 to 60
W	Drain cock with barb fitting: ø6 x ø4 nylon tubing	AF30 to 60
Z (6)	Name plate and caution plate for bowl in imperial units (PSI, °F)	AF10 to 60

Note 1) Drain guide is NPT 1/4 (applicable to AF30 to 60), and the exhaust port for auto-drain comes with ø3/8" One-touch fitting (applicable to AF30 to 60).

Note 2) Drain guide is G 1/4 (applicable to AF30 to 60).


Note 3) Bracket is not assembled and is supplied loose at the time of shipment.

Note 4) Applicable tubing O.D for auto-drain connection should be ø3/8" in case NPT thread port is chosen.

* When more than one specification is required, indicate in ascending alphanumeric order.

Note 5) Without a valve function.

Note 6) This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

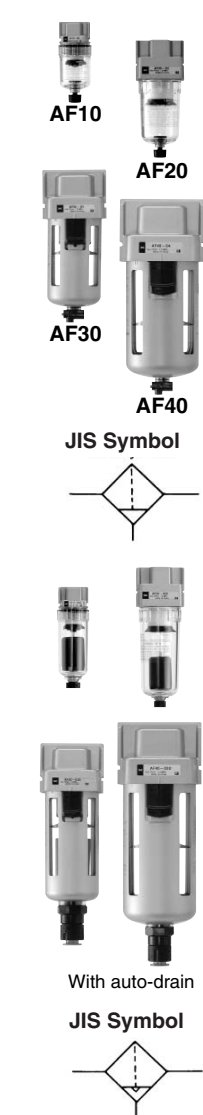

Accessory/Optional Specifications Combinations

⊙ : Combination available ⊠ : Combination not available
 ○ : Varies depending on the model △ : Available only with NPT thread

Accessory/Optional specifications	Combination	Symbol	Accessory			Optional specifications							Applicable filter			
			B	C	D	2	6	8	C	J	R	W	Z	AF10	AF20	AF30 to 60
Accessory	With bracket	B	⊙	○	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Float type auto-drain (N.C.)	C	○	⊙	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Float type auto-drain (N.O.)	D	⊙	○	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
Optional specifications	Metal bowl	-2	○	⊙	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Nylon bowl	-6	○	⊙	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Metal bowl with level gauge	-8	⊙	⊙	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	With bowl guard	-C	⊙	⊙	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Drain guide 1/4	-J	⊙	○	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Flow direction: Right → Left	-R	○	⊙	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Drain cock with barb fitting: ø6 x ø4 nylon tubing	-W	⊙	○	○	⊙	⊙	○	○	○	○	○	△	⊙	⊙	⊙
	Name plate and caution plate for bowl in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△	△	△

Standard Specifications

Model	AF10	AF20	AF30	AF40	AF40-06	AF50	AF60
Port size	M5 x 0.8	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1
Fluid	Air						
Proof pressure	1.5 MPa						
Maximum operating pressure	1.0 MPa						
Ambient and fluid temperature	-5 to 60°C (With no freezing)						
Nominal filtration rating	5 µm						
Bowl material	Polycarbonate						
Bowl guard	—	Option	Standard				
Drain capacity (cm ³)	2.5	8	25	45	45	45	45
Weight (kg)	0.06	0.18	0.22	0.45	0.49	0.99	1.05

Accessory Part No.

Applicable model		AF10	AF20	AF30	AF40	AF40-06	AF50	AF60
Accessory								
Bracket assembly (1)		—	AF20P-050AS	AF30P-050AS	AF40P-050AS	AF40P-070AS	AF50P-050AS	AF50P-050AS
Float type (2) auto-drain	N.O.	—	—	AD38 AD38N(3)	AD48 AD48N(3)	AD48 AD48N(3)	AD48 AD48N(3)	AD48 AD48N(3)
	N.C.	AD17	AD27	AD37 AD37N(3)	AD47 AD47N(3)	AD47 AD47N(3)	AD47 AD47N(3)	AD47 AD47N(3)



Note 1) Assembly includes a bracket and 2 mounting screws.

Note 2) Minimum operating pressure: N.O. type—0.1 MPa; N.C. type—0.1 MPa (AD17/27) and 0.15 MPa (AD37/47).

Note 3) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".




P. 14-2-39


Air Filter Series AF10 to 60

Flow Characteristics (Representative values)


AF10 M5

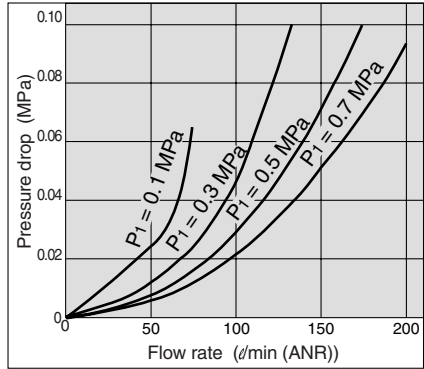


AF40-06 Rc 3/4

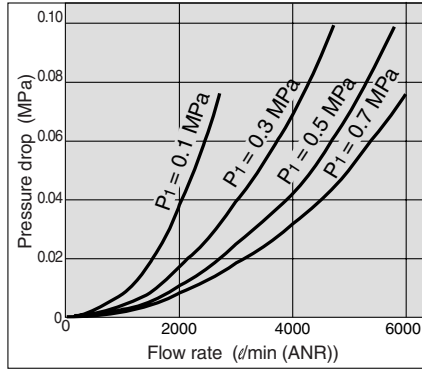


AF20 Rc 1/4

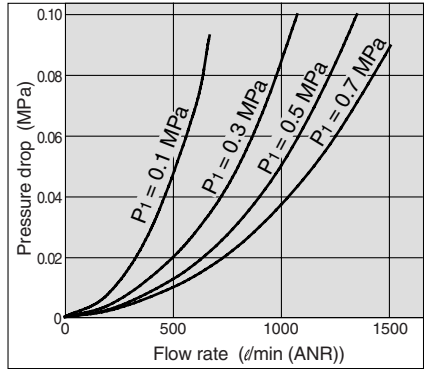


AF50 Rc 1

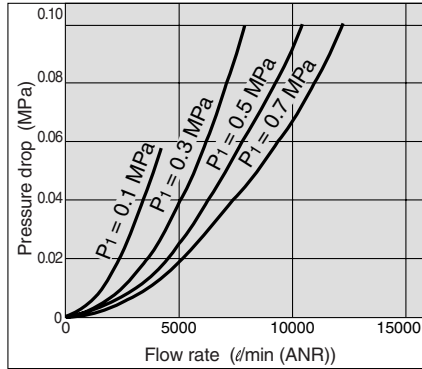


AF30 Rc 3/8

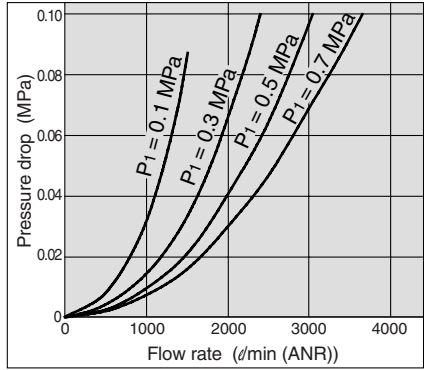

AF60 Rc 1

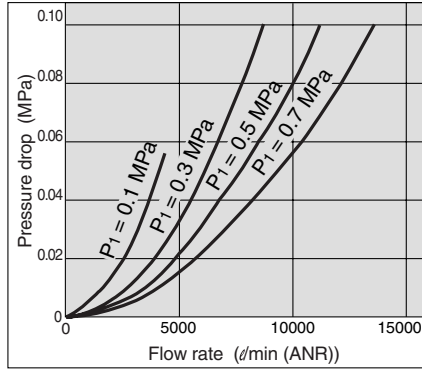

AF40 Rc 1/2

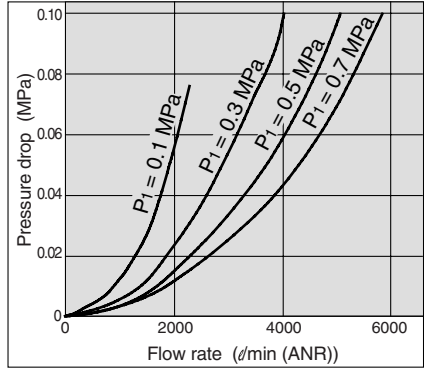

⚠ Precautions

Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Maintenance

⚠ Warning

1. Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE □

VY1

G


PPA

AL


Series AF10 to 60

Working Principle: Float Type Auto Drain


N.O. type: AD38/48

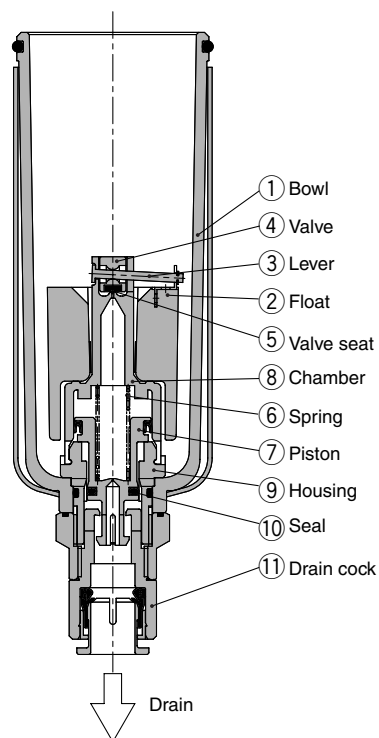

N.C. type: AD37/47

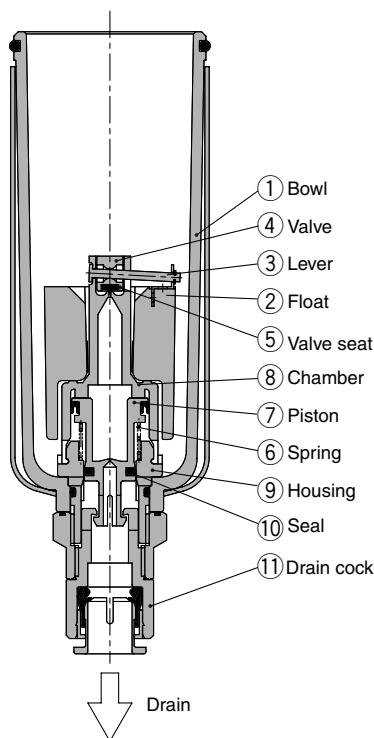

Compact auto-drain
N.C. type: AD17/27

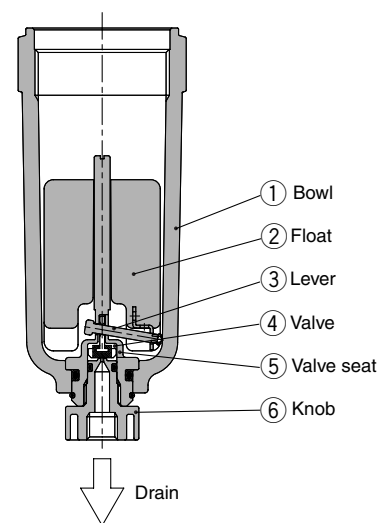

- **When the pressure inside the bowl is released:**

When pressure is released from the bowl ①, piston ⑦ is lowered by spring ⑥.

The sealing action of seal ⑩ is interrupted, and the outside air flows inside the bowl ①, through housing hole ⑨ and drain cock ⑪.

Therefore, if there is an accumulation of condensate in the bowl ①, it will drain out through the drain cock.

- **When pressure is applied inside the bowl:**

When the pressure exceeds 0.1 MPa, the force of piston ⑦ surpasses the force of spring ⑥, and the piston goes up.

This pushes seal ⑩ up so that the it creates a seal and the inside of the bowl ①, is shut off from the outside air.

If there is no accumulation of condensate in the bowl ①, at this time float ② will be pulled down by its own weight, causing valve ④, which is connected to lever ③, to seal valve seat ⑤.

- **When there is an accumulation of condensate in the bowl:**

Float ② rises due to its own buoyancy and pushes open the seal created by the valve seat, ⑤.

This allows the pressure inside the bowl ①, to enter the chamber ⑧. The result is that the combined pressure inside chamber ⑧ and the force of the spring ⑥, lower the piston ⑦.

This causes the sealing action of seal ⑩ to be interrupted, and the accumulated condensate in the bowl ①, drains out through the drain cock ⑪.

Turning drain cock ⑪ manually counterclockwise lowers piston ⑦, which pushes open the seal created by seal ⑩, thus allowing the condensate to drain out.

- **When the pressure inside the bowl is released:**

Even when pressure inside the bowl ①, is released, spring ⑥ keeps piston ⑦ in its upward position.

This keeps the seal created by the seal ⑩, in place, thus shutting the outside air from inside the bowl ①.

Therefore, even if there should be some condensate accumulation inside the bowl ①, it will not drain out.

- **When pressure is applied inside the bowl:**

Even when pressure is applied inside the bowl ①, the combined force of spring ⑥ and the pressure inside the bowl ①, keeps piston ⑦ in its upward position.

This maintains the seal created by the seal ⑩, in place, thus shutting the outside air from inside the bowl ①.

If there is no accumulation of condensate in the bowl ①, at this time float ② will be pulled down by its own weight, causing valve ④, which is connected to lever ③, to seal valve seat ⑤.

- **When there is an accumulation of condensate in the bowl:**

Float ② rises due to its own buoyancy and pushes open the seal created by the valve seat ⑤. Pressure passes from the bowl to chamber ⑧.

The result is that the pressure inside chamber ⑧ surpasses the force of the spring ⑥, and pushes piston ⑦ downwards.

This causes the sealing action of seal ⑩ to be interrupted and the accumulated condensate in the bowl ①, drains out through the drain cock ⑪.

Turning drain cock ⑪ manually counterclockwise lowers piston ⑦, which pushes open the seal created by seal ⑩, thus allowing the condensate to drain out.

- **When the pressure inside the bowl is released:**

Even when pressure inside the bowl ①, is released, the weight of the float ② causes valve ④, which is connected to lever ③, to seal valve seat ⑤. As a result, the inside of the bowl ①, is shut off from the outside air.

Therefore, even if there is an accumulation of condensate in the bowl ①, it will not drain out.

- **When pressure is applied inside the bowl:**

Even when pressure is applied inside the bowl ①, the weight of the float ②, and the differential pressure that is applied to valve ④ cause valve ④ to seal valve seat ⑤, and the outside air is shut off from the inside of the bowl ①.

- **When the drain is accumulated in the bowl:**


Float ② rises due to its own buoyancy and the seal at valve seat ⑤ is interrupted.

The condensate inside the bowl ① drains out through the knob, ⑥.

Turning knob ⑥ manually counterclockwise lowers it and causes the sealing action of valve seat ⑤ to be interrupted, thus allowing the condensate to drain out.

Air Filter Series AF10 to 60

Construction

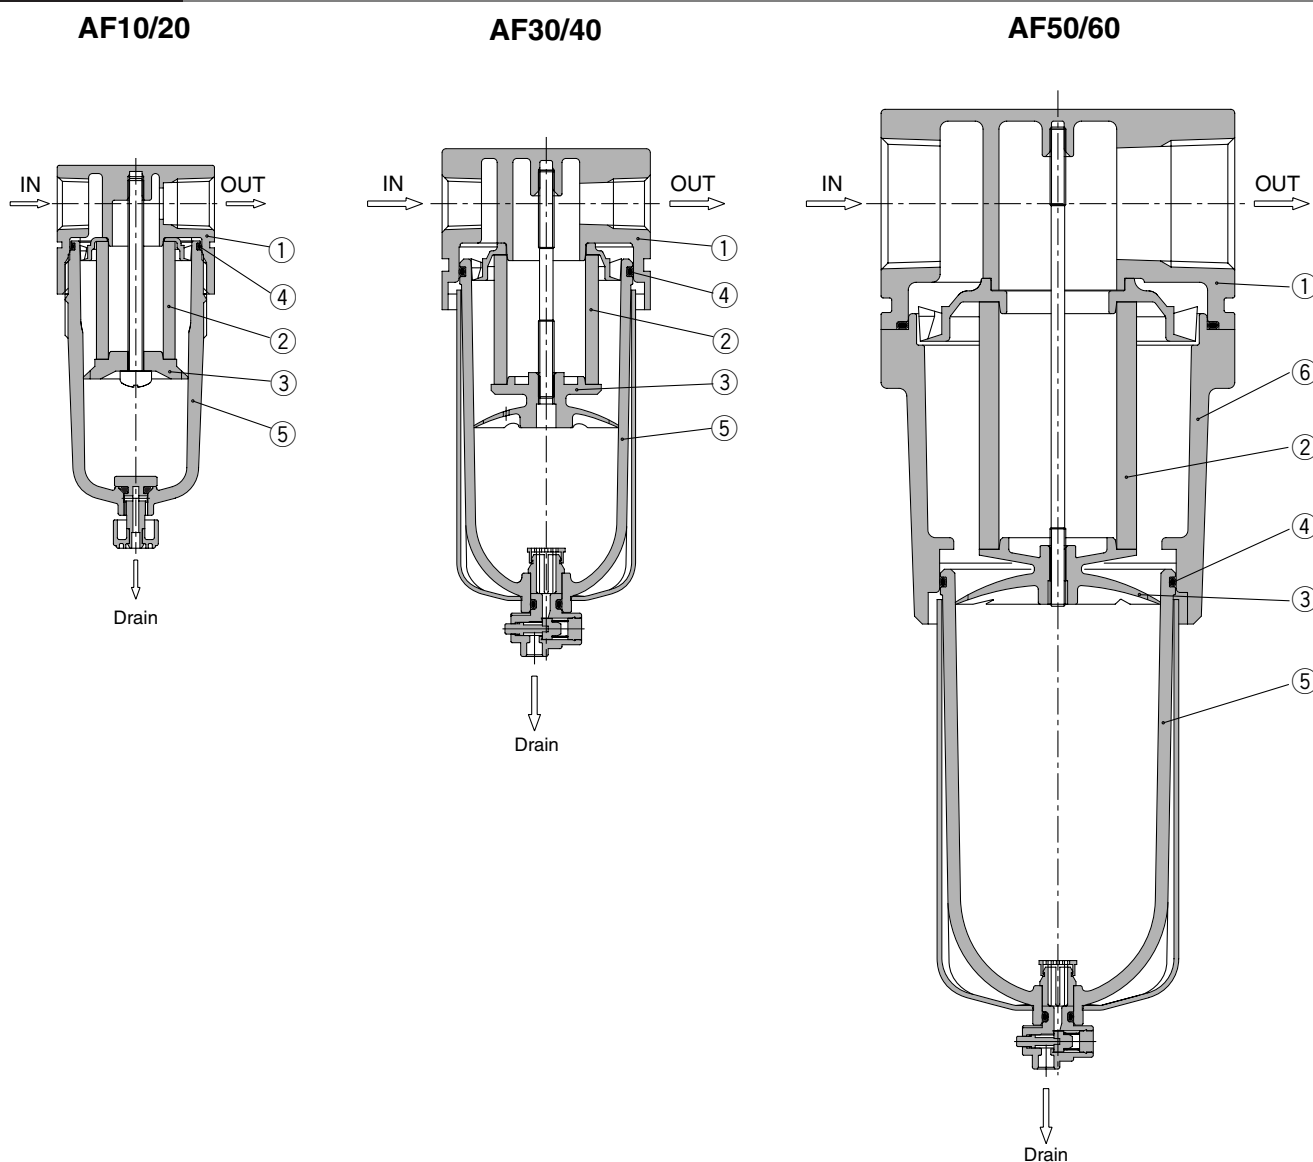

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Component Parts

No.	Description	Material			Color
		AF10/20	AF30/40/40-06	AF50/60	
①	Body	Zinc die-casted	Aluminum die-casted		Platinum silver
⑥	Housing	—		Aluminum die-casted	Platinum silver

Air Filter Replacement Parts

No.	Description	Material	Part no.						
			AF10	AF20	AF30	AF40	AF40-06	AF50	AF60
②	Filter element	Non-woven fabric	AF10P-060S	AF20P-060S	AF30P-060S	AF40P-060S	AF40P-060S	AF50P-060S	AF60P-060S
③	Baffle	PBT	AF10P-040S ⁽¹⁾	AF20P-040S	AF30P-040S	AF40P-040S	AF40P-040S	AF50P-040S	AF60P-040S
④	Bowl O-ring	NBR	C1SFP-260S	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S	C4SFP-260S	C4SFP-260S
⑤	Bowl assembly ⁽²⁾	PC	C1SF	C2SF	C3SF ⁽³⁾	C4SF ⁽³⁾	C4SF ⁽³⁾	C4SF ⁽³⁾	C4SF ⁽³⁾



Note 1) The material of the baffle for AF10 (AF10P-040S) only is POM.


Note 2) Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.

Note 3) Bowl assembly for AF30 to 60 models comes with a bowl guard (steel band material).


Series AF10 to 60

Dimensions


AF10/20

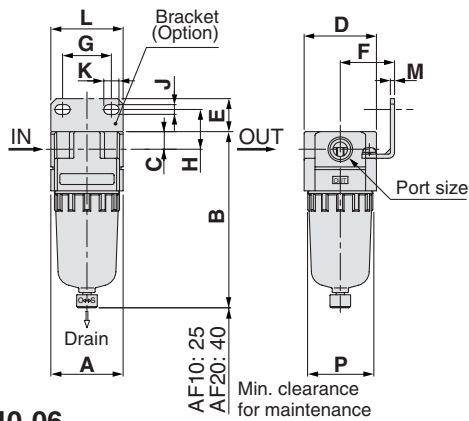

AF50/60

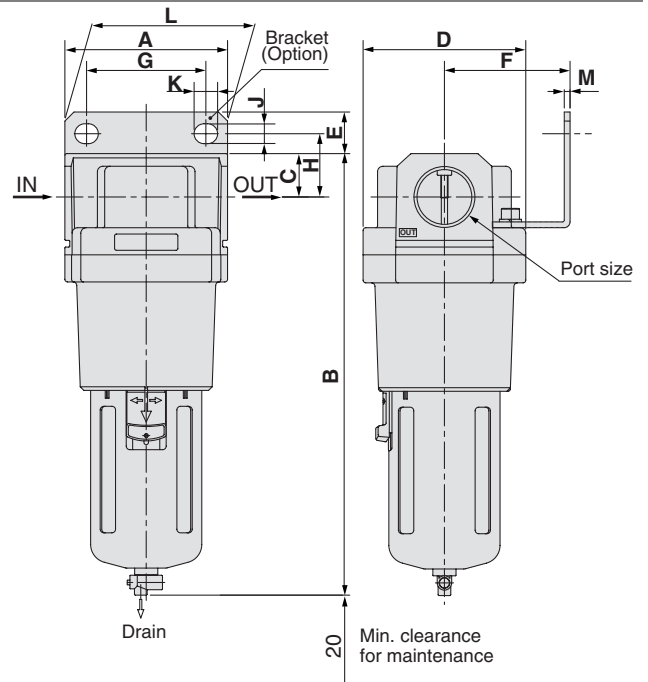

AF30/40/40-06

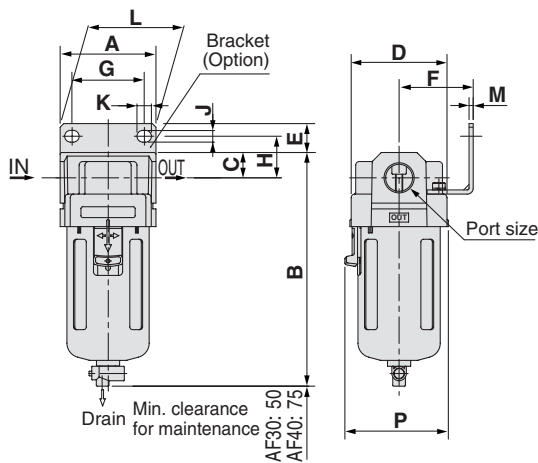

Applicable model	AF10, AF20		AF30, AF40, AF40-06, AF50, AF60				
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications							
	M5 x 0.8		N.O.: Black N.C.: Gray ø10 One-touch fitting			1/4 Width across flats 17	Barb fitting Applicable tubing: T0604

(mm)

Model	Port size	Standard specifications					Accessory specifications								
		A	B	C	D	P	Bracket mounting size								
		A	B	C	D	P	E	F	G	H	J	K	L	M	B
AF10	M5 x 0.8	25	67	7	25	28	—	—	—	—	—	—	—	—	85
AF20	1/8, 1/4	40	97	10	40	—	18	30	27	22	5.4	8.4	40	2.3	115
AF30	1/4, 3/8	53	129	14	53	57	16	41	40	23	6.5	8	53	2.3	170
AF40	1/4, 3/8, 1/2	70	165	18	70	73	17	50	54	26	8.5	10.5	70	2.3	204
AF40-06	3/4	75	169	20	70	73	14	50	54	25	8.5	10.5	70	2.3	208
AF50	3/4, 1	90	245	24	90	—	23	70	66	35	11	13	90	3.2	284
AF60	1	95	258	24	95	—	23	70	66	35	11	13	90	3.2	297

Model	Optional specifications			
	With drain guide	With barb fitting	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AF10	—	—	66	—
AF20	—	—	97	—
AF30	136	137	142	162
AF40	172	173	178	198
AF40-06	176	177	182	202
AF50	252	253	258	278
AF60	265	266	271	291

Air Filter Series AF20 to 60

Made to Order Specifications:

Please contact SMC for detailed dimensions, specifications, and lead times.

1. Special Temperature Environment

Special materials are used in the manufacturing of seals and resin parts to allow them to withstand various temperature conditions in cold or tropical (hot) climates.

Specifications

Part no.	-X430	-X440
Environment	Low temperature	High temperature
Ambient temperature	-30 to 60°C	-5 to 80°C
Fluid temperature	-5 to 60°C (With no freezing)	
Material	Rubber parts	Special NBR
	Main parts	FPM
	Metal (Aluminum die-casted)	

Applicable Model

Model	AF30	AF40	AF40-06	AF50	AF60
Port size	1/4 3/8	1/4 3/8 1/2	3/4	3/4 1	1

How to Order

AF 30 F 03 B 2 R X430

Air filter | Body size | Thread type | Option | Bowl | Port size

Body size
30 40 50 60

Thread type
Nil Rc
N (2) NPT
F (3) G

Note 1) Drain guide is NPT 1/4 (applicable to AC30 to 60)
Note 2) Drain guide is G 1/4 (applicable to AF30 to 60).

Option

Symbol	Description	Applicable model
J (5)	Drain guide 1/4	AF30 to 60
R	Flow direction: Rightt → Left	AF30 to 60
Z (6)	Name plate and caution plate for bowl in imperial units (PSI, °F)	AF30 to 60

* When more than one specification is required, indicate in ascending alphanumeric order.
Note 5) Without a valve function.
Note 6) For thread type NPT.

Bowl

Symbol	Description	Applicable model
2 (4)	Metal bowl	AF30 to 60

Note 4) Only metal bowl available.

Option

Symbol	Description	Applicable model
Nil	—	—
B (3)	With bracket	AF30 to 60

Note 3) Bracket is not assembled and is supplied loose at the time of shipment.

Port size

Symbol	Port size	Body size			
		30	40	50	60
02	1/4	●	●	—	—
03	3/8	●	●	—	—
04	1/2	●	●	—	—
06	3/4	—	●	●	—
10	1	—	—	●	●

2. High Pressure

Strong materials are used in the manufacturing of air filters intended for high pressure operation.

Specifications

Part no.	-X425
Proof pressure	3.0 MPa
Maximum operating pressure	2.0 MPa
Ambient and fluid temperature	-5 to 60°C (With no freezing)

Applicable Model

Model	AF20	AF30	AF40	AF40-06	AF50	AF60
Port sizes	1/8 1/4	1/4 3/8	1/4 3/8 1/2	3/4	3/4 1	1

How to Order

AF 30 F 03 B 2 R X425

Air filter | Body size | Thread type | Option | Bowl | Port size

Body size
20 30 40 50 60

Thread type
Nil Rc
N (1) NPT
F (2) G

Note 1) Drain guide is NPT 1/4 (applicable to AF30 to 60)
Note 2) Drain guide is G 1/4 (applicable to AF30 to 60).

Option

Symbol	Description	Applicable model
J (5)	Drain guide 1/4	AF30 to 60
R	Flow direction: Right → Left	AF20 to 60
Z (6)	Name plate and caution plate for bowl in imperial units (PSI, °F)	AF20 to 60

* When more than one specification is required, indicate in ascending alphanumeric order.
Note 5) Without a valve function.
Note 6) For thread type NPT.

Bowl

Symbol	Description	Applicable model
2 (4)	Metal bowl	AF20 to 60
8 (3)	Metal bowl with level gauge	AF30 to 60

Note 4) Only metal bowl or metal bowl with level gauge available.

Option

Symbol	Description	Applicable model
Nil	—	—
B (3)	With bracket	AF20 to 60

Note 3) Bracket is not assembled and is supplied loose at the time of shipment.

Port size

Symbol	Port size	Body size				
		20	30	40	50	60
01	1/8	●	—	—	—	—
02	1/4	●	●	—	—	—
03	3/8	—	●	●	—	—
04	1/2	—	—	●	—	—
06	3/4	—	—	●	●	—
10	1	—	—	—	●	●

Note) Please contact SMC regarding the detailed dimensions and optional availability.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Mist Separator

Series **AFM20/30/40**

How to Order

AFM 30 F 03 BD 2R

Mist separator: AFM, Body size: 30, Thread type: F, Port size: 03, Accessory: BD, Option: 2R

Body size
20 30 40

Thread type

Nil	Rc
N (1)	NPT
F (2)	G

Note 1) Drain guide is NPT 1/4 (applicable to AFM30 and 40), and the exhaust port for auto-drain comes with $\phi 3/8$ " One-touch fitting (applicable to AFM30 and 40).

Note 2) Drain guide is G 1/4 (applicable to AFM30 and 40).

Accessory

Symbol	Description	Applicable model
Nil	—	—
B (3)	With bracket	AFM20 to 40
C	Float type (4) auto-drain (N.C.)	AFM20 to 40
D	Float type (4) auto-drain (N.O.)	AFM30/40

Note 3) Bracket is not assembled and is supplied loose at the time of shipment.

Note 4) Applicable tubing O.D. for auto-drain connection should be $\phi 3/8$ " in case NPT thread port is chosen.

Option

Symbol	Description	Applicable model
2	Metal bowl	AFM20 to 40
6	Nylon bowl	AFM20 to 40
8	Metal bowl with level gauge	AFM30/40
C	With bowl guard	AFM20
J (5)	Drain guide 1/4	AFM30/40
R	Flow direction: Right → Left	AFM20 to 40
W	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	AFM30/40
Z (6)	Name plate and caution plate for bowl in imperial units (PSI, °F)	AFM20 to 40

* When more than one specification is required, indicate in ascending alphanumeric order.

Note 5) Without a valve function.

Note 6) For NPT thread type. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Accessory/Optional Specifications Combinations

Combination	Symbol	Accessory			Optional specifications							Applicable mist separator		
		B	C	D	2	6	8	C	J	R	W	Z	AFM20	AFM30 to 40
Accessory/Optional specifications														
Accessory	With bracket	B	○	○	○	○	○	○	○	○	○	△	○	○
	Float type auto-drain (N.C.)	C	○	○	○	○	○	○	○	○	○	△	○	○
	Float type auto-drain (N.O.)	D	○	○	○	○	○	○	○	○	○	△	○	○
Optional specifications	Metal bowl	-2	○	○	○	○	○	○	○	○	○	△	○	○
	Nylon bowl	-6	○	○	○	○	○	○	○	○	○	△	○	○
	Metal bowl with level gauge	-8	○	○	○	○	○	○	○	○	○	△	○	○
	With bowl guard	-C	○	○	○	○	○	○	○	○	○	△	○	○
	Drain guide 1/4	-J	○	○	○	○	○	○	○	○	○	△	○	○
	Flow direction: Right → Left	-R	○	○	○	○	○	○	○	○	○	△	○	○
	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	-W	○	○	○	○	○	○	○	○	○	△	○	○
	Name plate and caution plate for bowl in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△

○ : Combination available
○ : Varies depending on the model
□ : Combination not available
△ : Available only with NPT thread

Standard Specifications

Model	AFM20	AFM30	AFM40	AFM40-06
Port size	1/8 1/4	1/4 3/8	1/4 3/8 1/2	3/4
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.05 MPa			
Ambient and fluid temperature	-5 to 60°C (With no freezing)			
Rated flow (l/min (ANR)) (1)	200	450	1100	1100
Nominal filtration rating	0.3 μ m (95% filtered particle size)			
Outlet side oil mist concentration	Maximum 1.0 mg/m ³ (ANR) (approx. 0.8 ppm) (2)			
Bowl material	Polycarbonate			
Bowl guard	Option	Standard		
Drain capacity (cm ³)	8	25	45	45
Weight (kg)	0.18	0.22	0.44	0.49

Note 1) When the inlet pressure is 0.7 MPa. Flow rate varies depending on the inlet pressure.

Note 2) When the compressor oil mist discharge concentration is 30 mgf/m³ (ANR).

Accessory Part No.

Applicable model	AFM20	AFM30	AFM40	AFM40-06
Accessory				
Bracket assembly (1)	AF20P-050AS	AF30P-050AS	AF40P-050AS	AF40P-070AS
Float type auto-drain (2)	N.O.	AD38	AD48	AD48
	N.C.	AD27	AD47	AD47


Note 1) Assembly includes a bracket and 2 mounting screws.

Note 2) Minimum operating pressure: N.O. type-0.1 MPa; N.C. type-0.1 MPa (AD17/27) and 0.15 MPa (AD37/47).

Note 3) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D. should be $\phi 3/8$ ".



JIS Symbol




Mist Separator Series AFM20/30/40


Flow Characteristics (Representative values)

— : When saturated with oil
 - - - : Initial state


AFM20

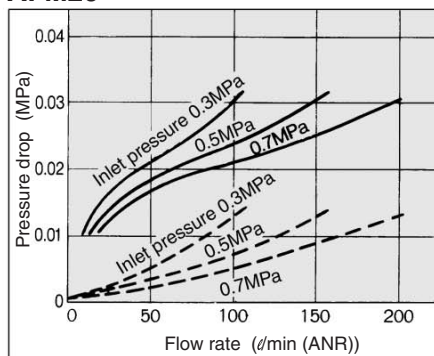

AFM30

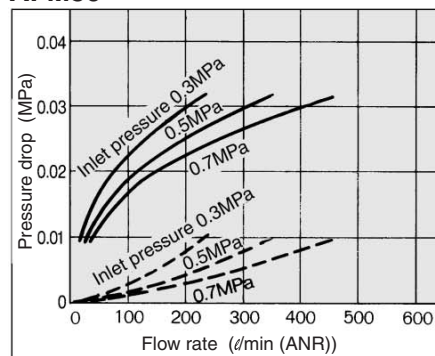


AFM40

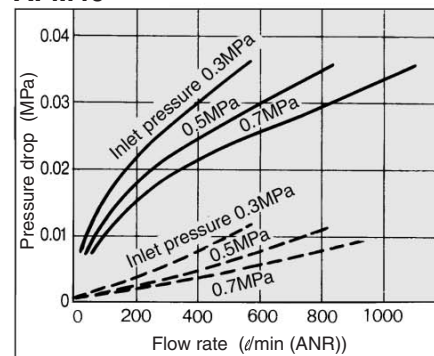


Construction

AFM20

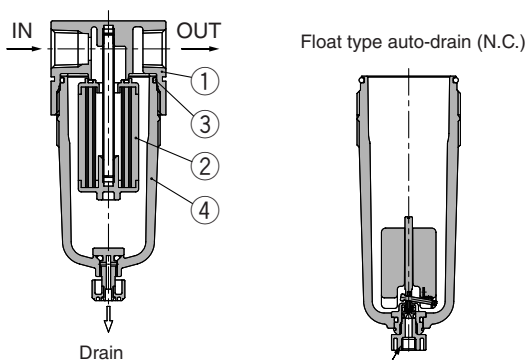

AFM30/40

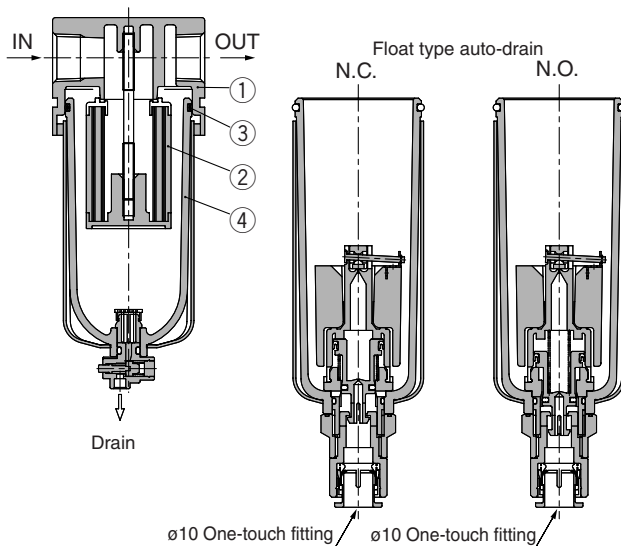

Component Parts

No.	Description	Material		Note
		AFM20	AFM30, AFM40, AFM40-06	
①	Body	Zinc die-casted	Aluminum die-casted	Platinum silver

Replacement Parts

No.	Description	Material	Part no.			
			AFM20	AFM30	AFM40	AFM40-06
②	Element assembly	—	AFM20P-060AS	AFM30P-060AS	AFM40P-060AS	AFM40P-060AS
③	Bowl O-ring	NBR	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S
④	Bowl assembly (1)	PC	C2SF	C3SF (2)	C4SF (2)	C4SF (2)

Note 1) Including O-Ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.
 Note 2) Bowl assembly for AFM30 to AFM40-06 includes a bowl guard (steel band material).

⚠ Precautions

Be sure to read before handling.
 Refer to pages 14-21-3 to 14-21-4
 for Safety Instructions and
 Common Precautions.

Air Supply

⚠ Caution

1. Install an air filter (Series AF) as a preliminary filter on the inlet side of the mist separator to prevent premature clogging.
2. Do not install on the inlet side of the dryer as this can cause premature clogging of the element.

Maintenance

⚠ Warning

1. Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.

Design

⚠ Caution

1. Design the system so that the mist separator is installed in a pulsation-free location. The difference between internal and external pressure inside the element should be kept within 0.1 MPa, as exceeding this value could cause damage.

Selection

⚠ Caution

1. Do not allow air flow that exceeds the rated flow. If the air flow is allowed outside the range of the rated flow even momentarily, drainage and lubricant may splash at the outlet side or cause damage to the component.
2. Do not use in a low pressure application (such as a blower). F.R.L. unit has its own minimum operating pressure depending on the equipment and is designed specifically to function with compressed air. If used below the minimum operating pressure, a loss of performance and malfunction can occur. Please contact SMC if an application under such conditions cannot be avoided.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G


PPA

AL


Series AFM20/30/40

Dimensions

AFM20

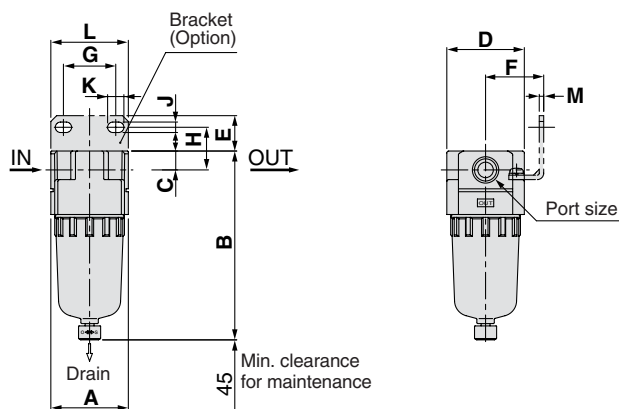

AFM30/40/40-06

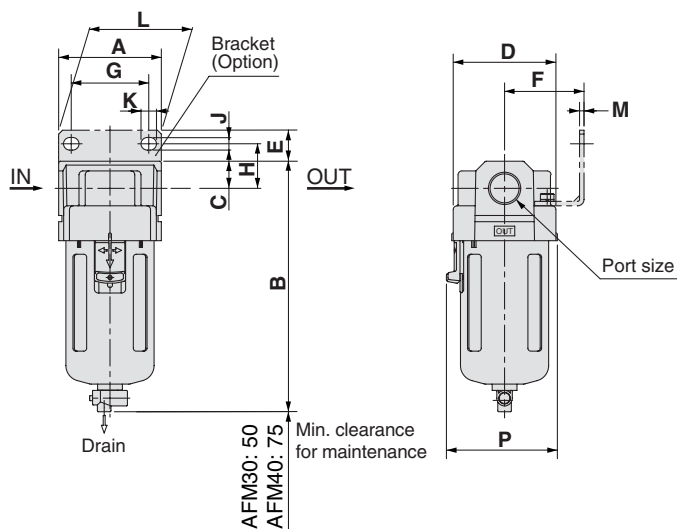

Applicable model	AFM20		AFM30, AFM40, AFM40-06				
Optional specifications	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting

(mm)

Model	Port size	Standard specifications					Accessory specifications									
		A	B	C	D	P	With bracket									
							E	F	G	H	J	K	L	M	B	
AFM20	1/8, 1/4	40	97	10	40	—	18	30	27	22	5.4	8.4	40	2.3	115	
AFM30	1/4, 3/8	53	129	14	53	57	16	41	40	23	6.5	8	53	2.3	170	
AFM40	1/4, 3/8, 1/2	70	165	18	70	73	17	50	54	26	8.5	10.5	70	2.3	204	
AFM40-06	3/4	75	169	20	70	73	14	50	54	25	8.5	10.5	70	2.3	208	

Model	Optional specifications			
	With drain guide	With barb fitting	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AFM20	—	—	97	—
AFM30	136	137	142	162
AFM40	172	173	178	198
AFM40-06	176	177	182	202

Micro Mist Separator

Series AFD20/30/40

How to Order

AFD 30 — **F 03** **BD** — **2R** — Option

Micro mist separator

Body size: 20 30 40

Thread type:

Nil	Rc
N ⁽¹⁾	NPT
F ⁽²⁾	G

Port size:

Symbol	Port size	Body size		
01	1/8	20	30	40
02	1/4	●	●	—
03	3/8	—	●	●
04	1/2	—	—	●
06	3/4	—	—	●

Accessory:

Symbol	Description	Applicable model
Nil	—	—
B ⁽³⁾	With bracket	AFD20 to 40
C	Float type ⁽⁴⁾ auto-drain (N.C.)	AFD20 to 40
D	Float type ⁽⁴⁾ auto-drain (N.O.)	AFD30/40

Option:

Symbol	Description	Applicable model
2	Metal bowl	AFD20 to 40
6	Nylon bowl	AFD20 to 40
8	Metal bowl with level gauge	AFD30/40
C	With bowl guard	AFD20
J ⁽⁵⁾	Drain guide 1/4	AFD30/40
R	Flow direction: Right → Left	AFD20 to 40
W	Drain cock with barb fitting: ø6 x ø4 nylon tubing	AFD30/40
Z ⁽⁶⁾	Name plate and caution plate for bowl in imperial units (PSI, °F)	AFD20 to 40

Note 1) Drain guide is NPT 1/4 (applicable to AFD30 and 40), and the exhaust port for auto drain comes with ø3/8" One-touch fitting (applicable to AFD30 and 40).

Note 2) Drain guide is G 1/4 (applicable to AFD30 and 40).

Note 3) Bracket is not assembled and is supplied loose at the time of shipment.

Note 4) Applicable tubing O.D for auto-drain connection should be ø3/8" in case NPT thread port is chosen.

Note 5) Without a valve function.

Note 6) For NPT thread type.

⊙: Combination available
○: Varies depending on the model
◻: Combination not available
△: Available only with NPT thread

Accessory/Optional Specifications Combinations

Combination	Symbol	Accessory			Optional specifications								Applicable micro mist separator			
		B	C	D	2	6	8	C	J	R	W	Z	AFD20	AFD30 to 40		
Accessory/Optional specifications																
Accessory	With bracket	B	⊙	○	⊙	⊙	○	○	○	⊙	○	△	⊙	⊙		
	Float type auto-drain (N.C.)	C	⊙	○	⊙	⊙	○	○	○	⊙	○	△	⊙	⊙		
	Float type auto-drain (N.O.)	D	⊙	○	⊙	⊙	○	○	○	⊙	○	△	⊙	⊙		
Optional specifications	Metal bowl	-2	⊙	⊙	○	○	○	○	○	⊙	○	△	⊙	⊙		
	Nylon bowl	-6	⊙	⊙	○	○	○	○	○	⊙	○	△	⊙	⊙		
	Metal bowl with level gauge	-8	⊙	⊙	○	○	○	○	○	⊙	○	△	⊙	⊙		
	With bowl guard	-C	⊙	⊙	○	○	○	○	○	⊙	○	△	⊙	⊙		
	Drain guide 1/4	-J	⊙	○	○	○	○	○	○	⊙	○	△	⊙	⊙		
	Flow direction: Right → Left	-R	⊙	⊙	○	⊙	⊙	○	○	⊙	○	△	⊙	⊙		
	Drain cock with barb fitting: ø6 x ø4 nylon tubing	-W	⊙	○	○	○	○	○	○	⊙	○	△	⊙	⊙		
	Name plate and caution plate for bowl in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△		

Standard Specifications

Model	AFD20	AFD30	AFD40	AFD40-06
Port size	1/8 1/4	1/4 3/8	1/4 3/8 1/2	3/4
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Minimum operating pressure	0.05 MPa			
Ambient and fluid temperature	-5 to 60°C (With no freezing)			
Rated flow (l/min (ANR)) ⁽¹⁾	120	240	600	600
Nominal filtration rating	0.01 µm (95% filtered particle size)			
Outlet side oil mist concentration	Max. 0.1 mg/m ³ (ANR) (Before saturated with oil: 0.01 mg/m ³ (ANR) or less, approx. 0.008 ppm) ⁽²⁾			
Bowl material	Polycarbonate			
Bowl guard	Option	Standard		
Drain capacity (cm ³)	8	25	45	45
Weight (kg)	0.18	0.22	0.44	0.49

Note 1) When the inlet pressure is 0.7 MPa. The flow rate varies depending on the inlet pressure.

Note 2) When the compressor oil mist discharge concentration is 30 mg/m³ (ANR).

Accessory Part No.

Applicable model	AFD20	AFD30	AFD40	AFD40-06	
Accessory					
Bracket assembly ⁽¹⁾	AF20P-050AS	AF30P-050AS	AF40P-050AS	AF40P-070AS	
Float type auto-drain ⁽²⁾	N.O.	AD38	AD38N ⁽³⁾	AD48	AD48N ⁽³⁾
	N.C.	AD27	AD37	AD37N ⁽³⁾	AD47

Note 1) Assembly includes a bracket and 2 mounting screws.

Note 2) Minimum operating pressure: N.O. type—0.1 MPa; N.C. type—0.1 MPa (AD27) and 0.15 MPa (AD37/47).

Note 3) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".




- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL

Series AFD20/30/40


Flow Characteristics (Representative values)

— : When saturated with oil
 - - - : Initial state


AFD20

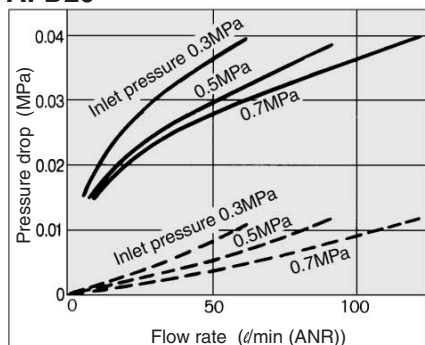

AFD30

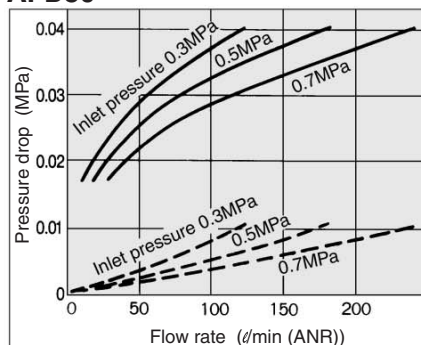


AFD40

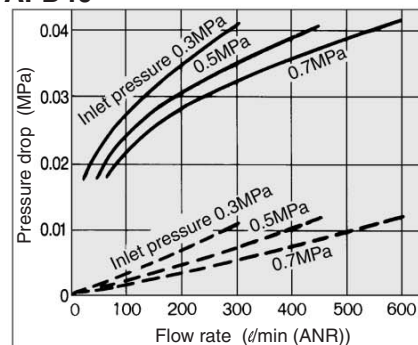


Construction

AFD20

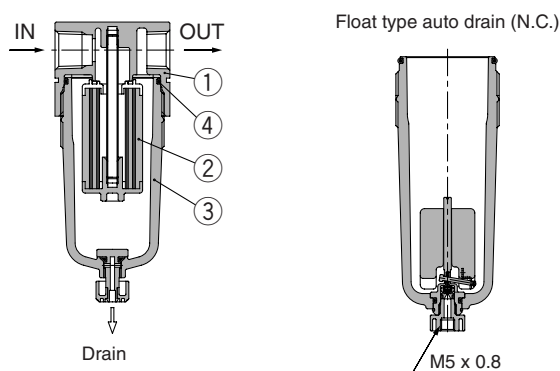

AFD30/40

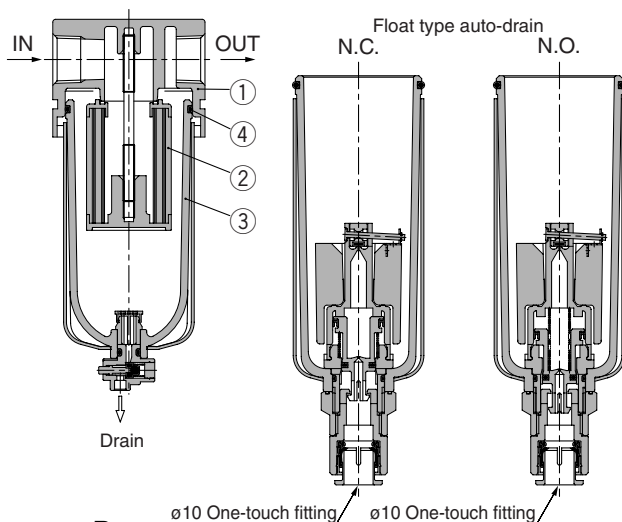

Component Parts

No.	Description	Material		Note
		AFD20	AFD30, AFD40, AFD40-06	
①	Body	Zinc die-casted	Aluminum die-casted	Platinum silver

Replacement Parts

No.	Description	Material	Part no.			
			AFD20	AFD30	AFD40	AFD40-06
②	Element assembly	—	AFD20P-060AS	AFD30P-060AS	AFD40P-060AS	AFD40P-060AS
③	Bowl assembly (1)	PC	C2SF	C3SF (2)	C4SF (2)	C4SF (2)
④	Bowl O-ring	NBR	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S

Note 1) Including O-ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.

Note 2) Bowl assembly for AFD30 to AFD40-06 includes a bowl guard (steel band material).

Precautions

Be sure to read before handling.
 Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Air Supply

Caution

1. Install a mist separator (Series AFM) as a preliminary filter on the inlet side of the micro mist separator to prevent premature clogging.
2. Do not install on the inlet side of the dryer as this can cause premature clogging of the element.

Maintenance

Warning

1. Replace the element every 2 years or when the pressure drops becomes 0.1 MPa, whichever comes first, to prevent damage to the element.

Design

Caution

1. Design the system so that the mist separator is installed in a pulsation-free location. The difference between internal and external pressure inside the element should be kept within 0.1 MPa, as exceeding this value could cause damage.

Selection


Caution

1. Do not allow air flow that exceeds the rated flow. If the air flow is allowed outside the range of the rated flow even momentarily, drainage and lubricant may splash at the outlet side or cause damage to the component.
2. Do not use in a low pressure application (such as a blower). F.R.L. unit has its own minimum operating pressure depending on the equipment and is designed specifically to function with compressed air. If used below the minimum operating pressure, a loss of performance and malfunction can occur. Please contact SMC if an application under such conditions cannot be avoided.


Micro Mist Separator Series AFD20/30/40








Dimensions

AFD20

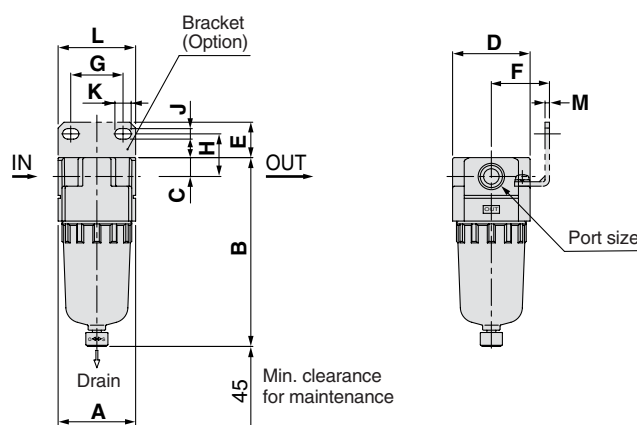

AFD30/40/40-06

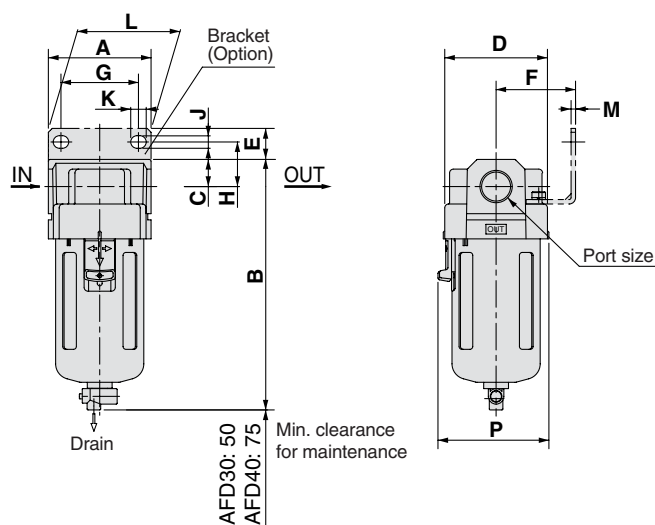

Applicable model	AFD20		AFD30, AFD40, AFD40-06				
	With compact auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications			 N.O.: Black N.C.: Gray ø10 One-touch fitting			 Width across flats 17	 Barb fitting Applicable tubing: T0604

(mm)

Model	Port size	Standard specifications					Accessory specifications								
							With bracket						With auto-drain		
		A	B	C	D	P	E	F	G	H	J	K		L	M
AFD20	1/8, 1/4	40	97	10	40	—	18	30	27	22	5.4	8.4	40	2.3	115
AFD30	1/4, 3/8	53	129	14	53	57	16	41	40	23	6.5	8	53	2.3	170
AFD40	1/4, 3/8, 1/2	70	165	18	70	73	17	50	54	26	8.5	10.5	70	2.3	204
AFD40-06	3/4	75	169	20	70	73	14	50	54	25	8.5	10.5	70	2.3	208

Model	Optional specifications			
	With drain guide	With barb fitting	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AFD20	—	—	97	—
AFD30	136	137	142	162
AFD40	172	173	178	198
AFD40-06	176	177	182	202

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□



VY1

G

PPA

AL

Modular Style Regulator *Series AR*

Regulator Series <i>AR</i>	Model	Port size	Accessory
 <p data-bbox="288 927 571 958">Pages 14-2-47 to 14-2-53</p>	AR10	M5 x 0.8	
	AR20	1/8, 1/4	
	AR25	1/4, 3/8	
	AR30	1/4, 3/8	
	AR40	1/4, 3/8, 1/2	
	AR40-06	3/4	
 <p data-bbox="288 1352 571 1384">Pages 14-2-54 to 14-2-59</p>	AR50	3/4, 1	Bracket Square embedded type pressure gauge (Except AR10) Round pressure gauge Panel mount
	AR60	1	
	AR20K	1/8, 1/4	
	AR25K	1/4, 3/8	
	AR30K	1/4, 3/8	
	AR40K	1/4, 3/8, 1/2	
AR40K-06	3/4		
AR50K	3/4, 1		
AR60K	1		

Regulator

Series AR10 to 60

How to Order



AR20



AR40

AR 30 F 03 BE 1N

Regulator

Body size

10 20 25 30 40 50 60

Thread type

Nil	Metric thread (M5)
N	Rc
F	NPT
	G

Port size

Symbol	Port size	Body size						
		10	20	25	30	40	50	60
M5	M5	●	—	—	—	—	—	—
01	1/8	—	●	—	—	—	—	—
02	1/4	—	●	—	—	●	—	—
03	3/8	—	—	●	●	—	—	—
04	1/2	—	—	—	—	●	—	—
06	3/4	—	—	—	—	●	●	—
10	1	—	—	—	—	—	●	●

Option

Symbol	Description	Applicable model
1 ⁽²⁾	0.02 to 0.2 MPa setting	AR10 to 60
N	Non-relieving	AR10 to 60
R	Flow direction: Right → Left	AR10 to 60
Y	Upward handle	AR10 to 60
Z ⁽³⁾	Name plate and pressure gauge in imperial units (PSI, °F)	AR10 to 60



* When more than one specification is required, indicate in ascending alphanumeric order.

Note 1) This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Note 2) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.


Accessory

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AR10 to 60
E	With square embedded type pressure gauge (With limit indicator)	AR20 to 60
G	With round pressure gauge (Without limit indicator)	AR10
	With round pressure gauge (With limit indicator)	AR20 to 60
H	With set nut (For panel mount)	AR10 to 40



Note) Optional parts are not assembled and are supplied loose at the time of shipment (except option E).

JIS Symbol



P. 14-2-52/53

Accessory/Optional Specifications Combinations

Combination	Symbol	Accessory					Optional specifications					Applicable regulator		
		B	E	G	H	1	N	R	Y	Z	AR10	AR20 to 40	AR50 to 60	
Accessory/Optional specifications														
With bracket (With set nut)	B	○	○	○	○	○	○	○	○	△	○	○	○	
Square embedded type pressure gauge	E	○	○	○	○	○	○	○	○	△	○	○	○	
Round pressure gauge	G	○	○	○	○	○	○	○	○	△	○	○	○	
With set nut (For panel mount)	H	○	○	○	○	○	○	○	○	△	○	○	○	
Optional specifications														
0.02 to 0.2 MPa setting	-1	○	○	○	○	○	○	○	○	△	○	○	○	
Non-relieving type	-N	○	○	○	○	○	○	○	○	△	○	○	○	
Flow direction: Right → Left	-R	○	○	○	○	○	○	○	○	△	○	○	○	
Upward handle	-Y	○	○	○	○	○	○	○	○	△	○	○	○	
Name plate and pressure gauge in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△	

○ : Combination available

□ : Combination not available

○ : Varies depending on the model △ : Available only with NPT thread

Standard Specifications

Model	AR10	AR20	AR25	AR30	AR40	AR40-06	AR50	AR60
Port size	M5 x 0.8	1/8, 1/4	1/4, 3/8	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1
Fluid	Air							
Proof pressure	1.5 MPa							
Maximum operating pressure	1.0 MPa							
Set pressure range	0.05 to 0.85 MPa							
Pressure gauge port size ⁽¹⁾	Rc 1/16 ⁽²⁾	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/4	Rc, NPT, G 1/4	Rc, NPT, G 1/4	Rc, NPT, G 1/4
Relief pressure	Set pressure + 0.05 MPa ⁽³⁾ (at relief flow rate of 0.1 l/min (ANR))							
Ambient and fluid temperature	-5 to 60°C (With no freezing)							
Construction	Relieving type							
Weight (kg)	0.06	0.26	0.21	0.29	0.44	0.47	1.17	1.22

Note 1) Pressure gauge connection threads are not required for regulator with a square embedded type pressure gauge (AR20 to AR60).

Note 2) Use a bushing (part no: 131368) when connecting the R 1/8 pressure gauge to the R 1/16 gauge port.

Note 3) Except AR10.

Accessory Part No.

Applicable model		AR10	AR20	AR25	AR30	AR40	AR40-06	AR50	AR60
Accessory									
Bracket assembly ⁽¹⁾		AR10P-270AS	AR20P-270AS	AR25P-270AS	AR30P-270AS	AR40P-270AS	AR40P-270AS	AR50P-270AS ⁽⁵⁾	AR50P-270AS ⁽⁵⁾
Set nut		AR10P-260S	AR20P-260S	AR25P-260S	AR30P-260S	AR40P-260S	AR40P-260S	— ⁽⁶⁾	— ⁽⁶⁾
Pressure gauge ⁽²⁾	1 MPa	Round type	G27-10-R1	G36-10-□01	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02	G46-10-□02
		Square embedded type ⁽⁴⁾	—	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS
	0.2 MPa	Round type	G27-10-R1 ⁽³⁾	G36-2-□01	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02	G46-2-□02
		Square embedded type ⁽⁴⁾	—	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS

Note 1) Assembly includes a bracket and set nuts.

Note 2) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT.

Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 3) For 1.0 MPa.

Note 4) Includes one O-ring and 2 mounting screws.

Note 5) Assembly includes a bracket and 2 mounting screws.

Note 6) Please contact SMC regarding the set nuts for AR50 and AR60.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Series AR10 to 60

⚠ Precautions

Be sure to read before handling.
Refer to pages 14-21-3 to 14-21-4
for Safety Instructions and Common
Precautions.

Mounting & Adjustment

⚠ Warning


1. Set the regulator while verifying the displayed values of the inlet and outlet pressure gauges. Turning the knob excessively can cause damage to the internal parts.
2. The pressure gauge included with regulators for 0.02 to 0.2 MPa setting is for up to 0.2 MPa use only. Exceeding 0.2 MPa of pressure can damage the gauge. Nevertheless, the gauge for the AR10 regulator with 0.02 to 0.2 MPa setting is for up to 1.0 MPa use.
3. Do not use tools on the pressure regulator knob as this may cause damage. It must be operated manually.

⚠ Caution

1. Be sure to unlock the knob before adjusting the pressure and lock it after setting the pressure.

Failure to follow this procedure can cause damage to the knob and the outlet pressure may fluctuate.


- Pull the pressure regulator knob to unlock. (You can visually verify this with the "orange mark" that appears in the gap.)
- Push the pressure regulator knob to lock. When the knob is not easily locked, turn it left and right a little and then push it (when the knob is locked, the "orange mark", i.e., the gap will disappear).



2. A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 for details.
3. Please contact SMC when using the regulator between a solenoid valve and an actuator.

Flow Characteristics (Representative values)

Condition: Inlet pressure 0.7 MPa

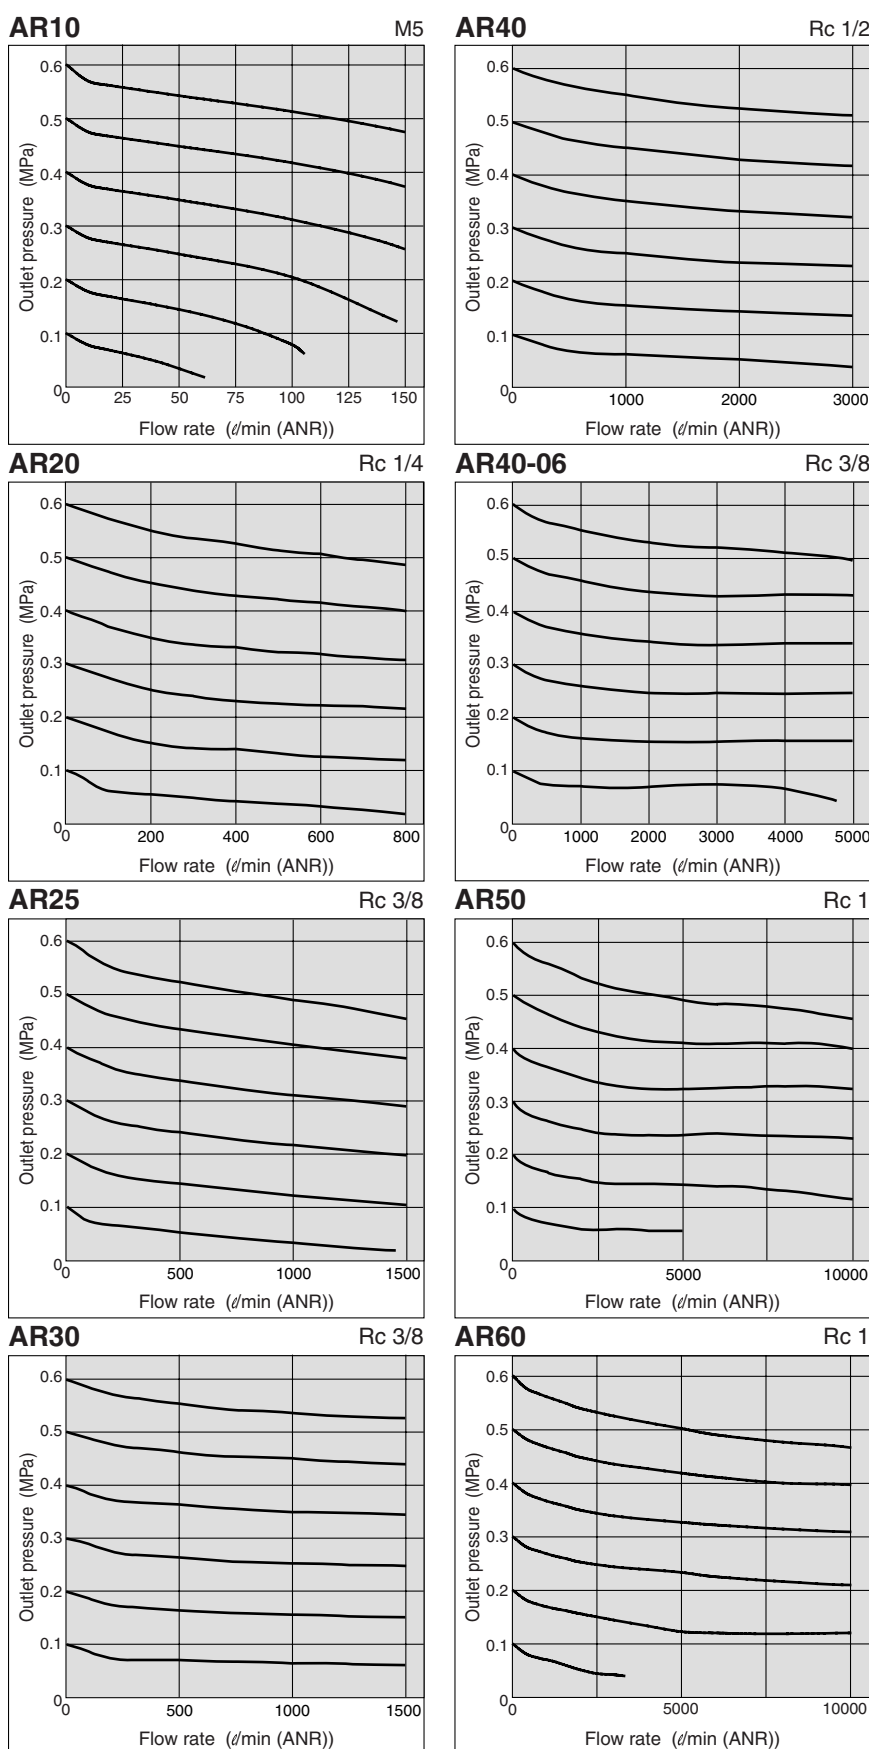


Regulator Series AR10 to 60


Conditions:
 Inlet pressure 0.7 MPa
 Outlet pressure 0.2 MPa
 Flow rate 20 l/min (ANR)

Pressure Characteristics (Representative values)


AR10

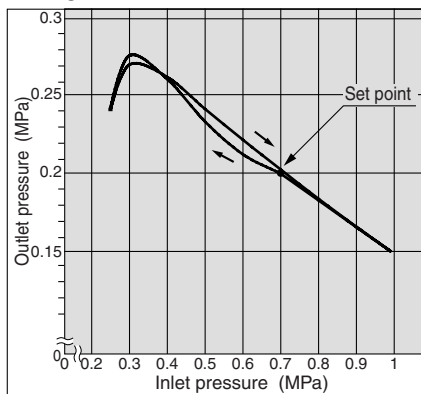


AR40

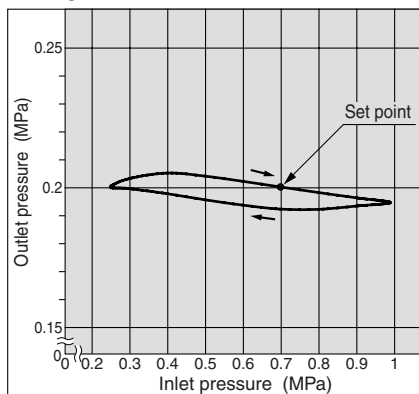


AR20

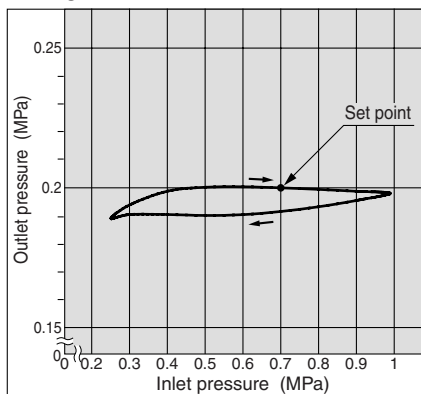


AR40-06

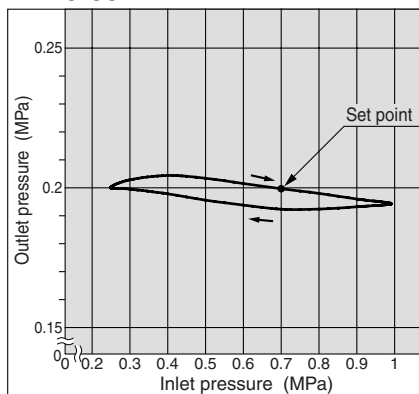


AR25

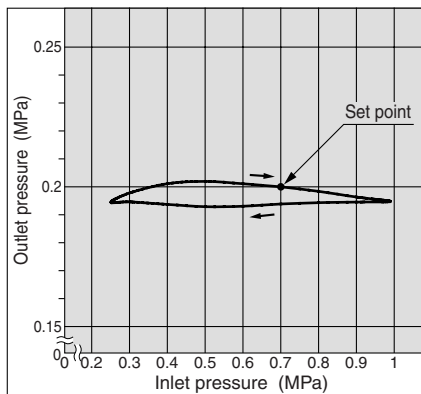


AR50

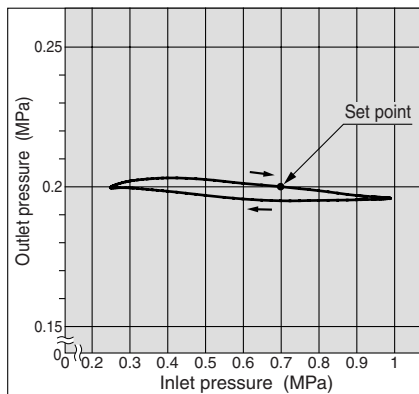

AR30

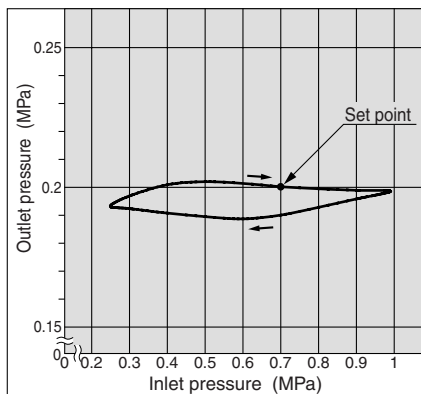

AR60

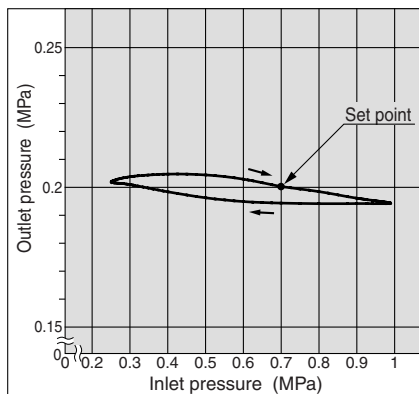

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1





G

PPA

AL

Series AR10 to 60

Construction

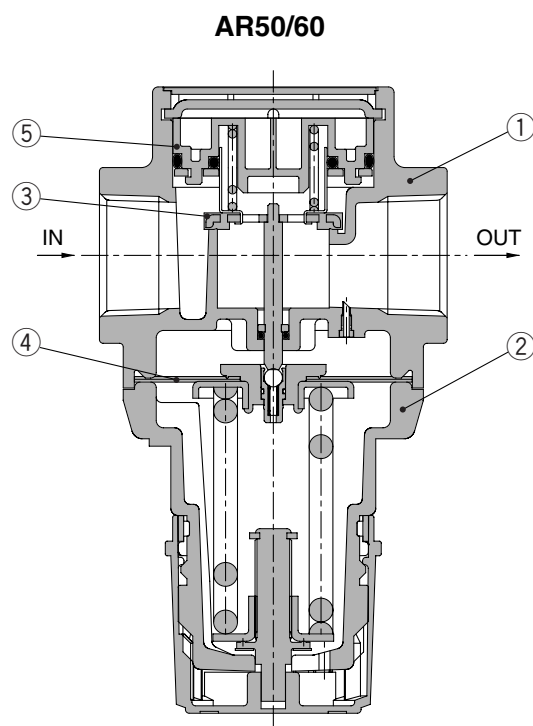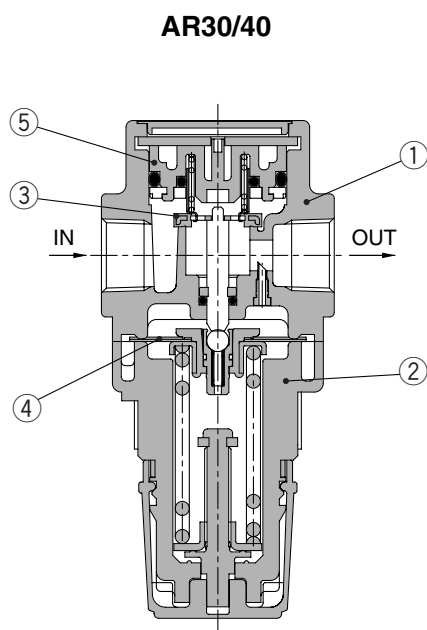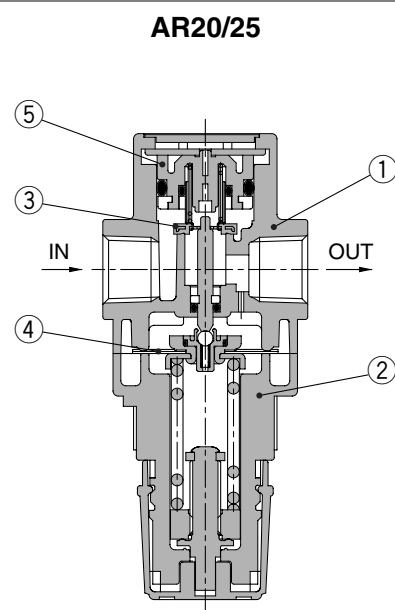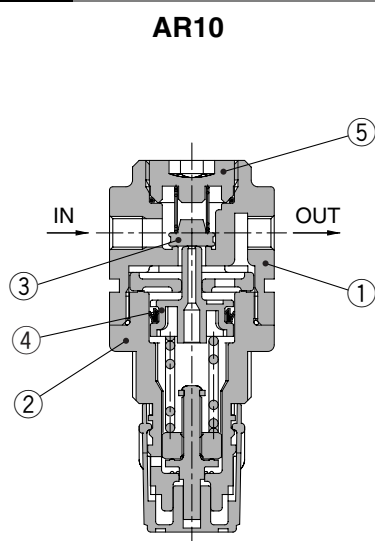

Component Parts

No.	Description	Material			Note
		AR10/20	AR25 to 40(-60)	AR50/60	
①	Body	Zinc die-casted	Aluminum die-casted	Platinum silver	
②	Bonnet	Polyacetal		Aluminum die-casted	Black

Replacement Parts


No.	Description	Materials	Part no.							
			AR10	AR20	AR25	AR30	AR40	AR40-06	AR50	AR60
③	Valve assembly	Stainless steel Brass, HNBR	AR10P-090S	AR20P-410AS ⁽²⁾	AR25P-410AS ⁽²⁾	AR30P-410AS ⁽²⁾	AR40P-410AS ⁽²⁾	AR40P-410AS ⁽²⁾	AR50P-410AS ⁽²⁾	AR60P-410AS ⁽²⁾
④	Diaphragm assembly	Weatherability NBR	AR10P-150AS ⁽¹⁾	AR20P-150AS	AR25P-150AS	AR30P-150AS	AR40P-150AS	AR40P-150AS	AR50P-150AS	AR50P-150AS
⑤	Valve guide assembly	POM	131329	AR20P-050AS	AR25P-050AS	AR30P-050AS	AR40P-050AS	AR40P-050AS	AR50P-050AS	AR60P-050AS

ⓘ Note 1) AR10 is a piston and gasket (KSYP-13) type assembly.
 ⓘ Note 2) Assembly includes valve, valve spring and stem assembly.


Regulator Series AR10 to 60

Dimensions

AR10 to 40

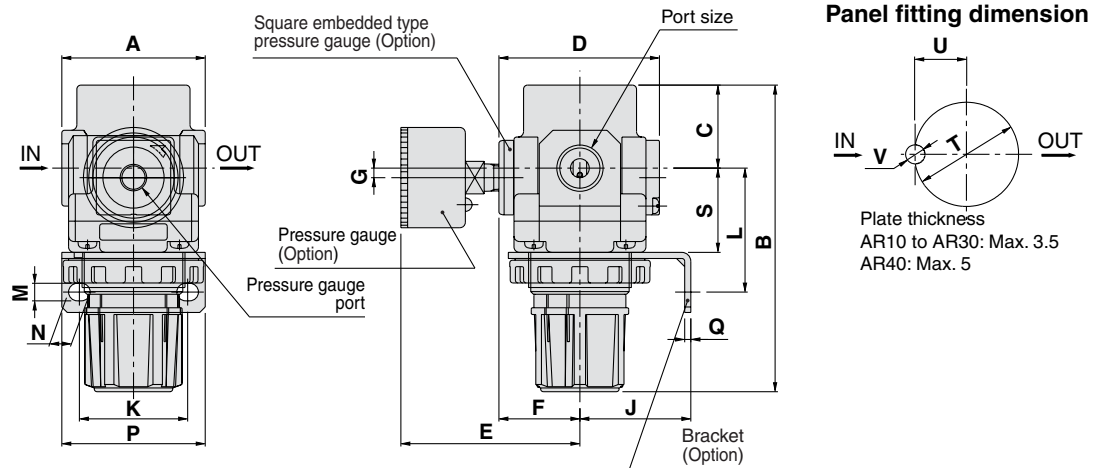

AR50/60

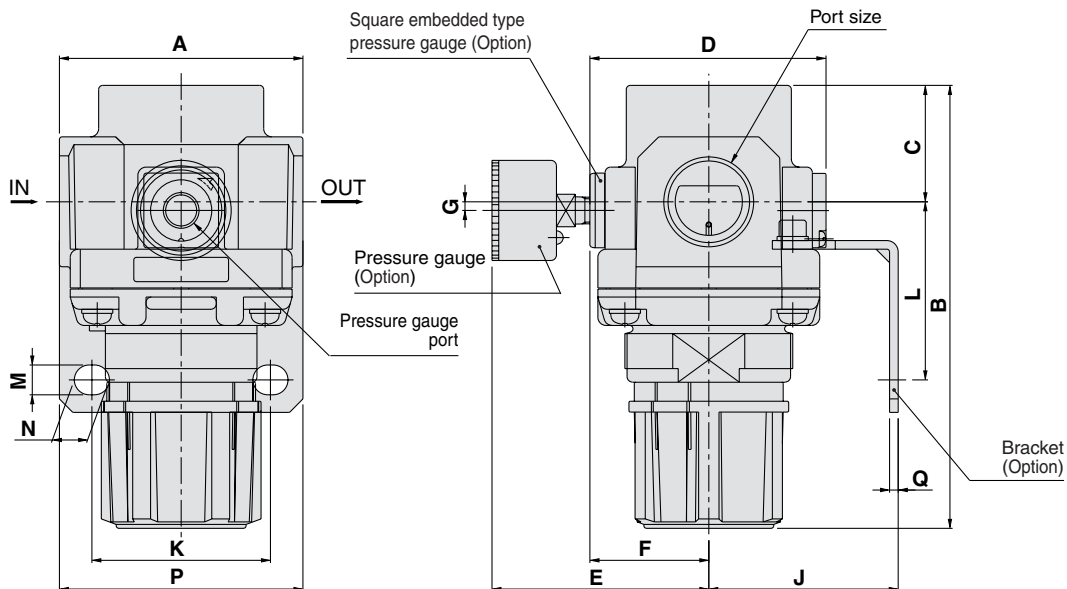

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

(mm)

Model	Port size	Standard specifications				Accessory specifications													
						With pressure gauge			Bracket mounting size							Panel mount			
		A	C	B	D	E	F	G	J	K	L	M	N	P	Q	S	T	U	V
AR10	M5 x 0.8	25	11	58	25	26	—	0	25	28	30	4.5	6.5	40	2	18	18.5	—	—
AR20	1/8, 1/4	40	26.5	94	57	65	29.5	2 Note)	30	34	44	5.4	15.4	55	2.3	25	28.5	14	6
AR25	1/4, 3/8	53	28	101	55	64	28.5	0	30	34	44	5.4	15.4	55	2.3	26	32.5	16	6
AR30	1/4, 3/8	53	31	116	59	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7
AR40	1/4, 3/8, 1/2	70	36	128	68	74	35	3.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7
AR40-06	3/4	75	36	129	68	74	35	3	50	54	56	8.5	10.5	70	2.3	37	42.5	21	7
AR50	3/4, 1	90	43	169	87	84	44.5	3.3	70	66	65.8	11	13	90	3.2	—	—	—	—
AR60	1	95	46	176	87	84	44.5	3.3	70	66	65.8	11	13	90	3.2	—	—	—	—



Note) For AR20 only, the position of the pressure gauge is above the center of the piping.

Regulator Series AR20 to 60

Made to Order Specifications:

Please contact SMC for detailed dimensions, specifications, and lead times.

1. Special Temperature Environment

Special materials are used in the manufacturing of seals and resin parts to allow them to withstand various temperature conditions in cold or tropical (hot) regions.


Specifications

Part no.		-X430	-X440
Environment		Low temperature	High temperature
Ambient temperature		-30 to 60°C	-5 to 80°C
Fluid temperature		-5 to 60°C (With no freezing)	
Material	Rubber parts	Special NBR	FPM
	Main metal parts	Metal (Aluminum die-casted)	

Applicable Model

Model	AR25	AR30	AR40	AR40-06	AR50	AR60
Port size	1/4, 3/8	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1

How to Order

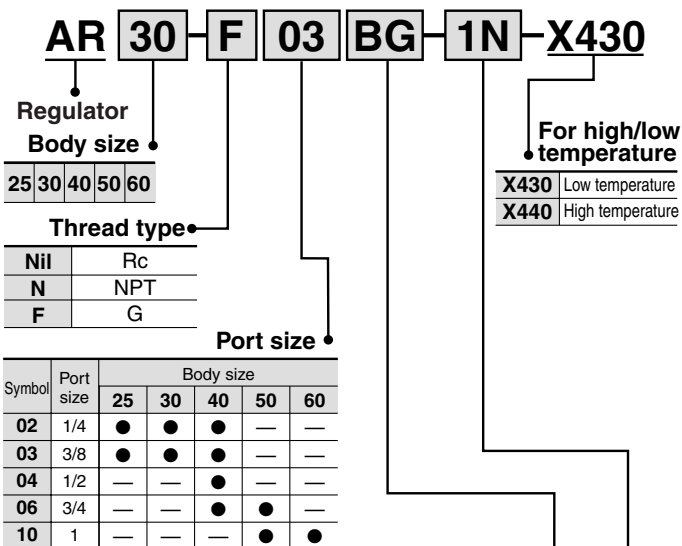

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AR25 to 60
G ⁽²⁾	With round pressure gauge (With limit indicator)	AR25 to 60
H	With set nut (For panel mount)	AR25 to 40

- Note 1) Optional parts are not assembled and are supplied loose at the time of shipment.
 Note 2) Mounting thread for pressure gauge: 1/8 for AR25 to 30; 1/4 for AR40 to 60
 Pressure gauge type: G43

Symbol	Description	Applicable model
1 ⁽³⁾	0.02 to 0.2 MPa setting	AR25 to 60
N	Non-relieving type	AR25 to 60
R	Flow direction: Right → Left	AR25 to 60
Y	Upward handle	AR25 to 60
Z ⁽⁴⁾	Name plate and pressure gauge in imperial units (PSI, °F)	AR25 to 60

- * When more than one specification is required, indicate in ascending alphanumeric order.
 Note 3) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.
 Note 4) For thread type NPT.
 This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Note 5) Please consult with SMC for detailed dimensions and available attachments and options.
 Note 6) Comes with type T handle.

2. High Pressure

Strong materials are used in the manufacturing of air filters intended for high pressure operation. Also construction modification allows a wider regulating pressure range.

Specifications


Part no.	-X425
Proof pressure	3.0 MPa
Max. operating pressure	2.0 MPa
Set pressure range	0.1 to 1.6 MPa
Ambient and fluid temperature	-5 to 60°C (With no freezing)



Applicable Model

Model	AR20	AR25	AR30	AR40	AR40-06	AR50	AR60
Port size	1/8, 1/4	1/4, 3/8	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1

How to Order

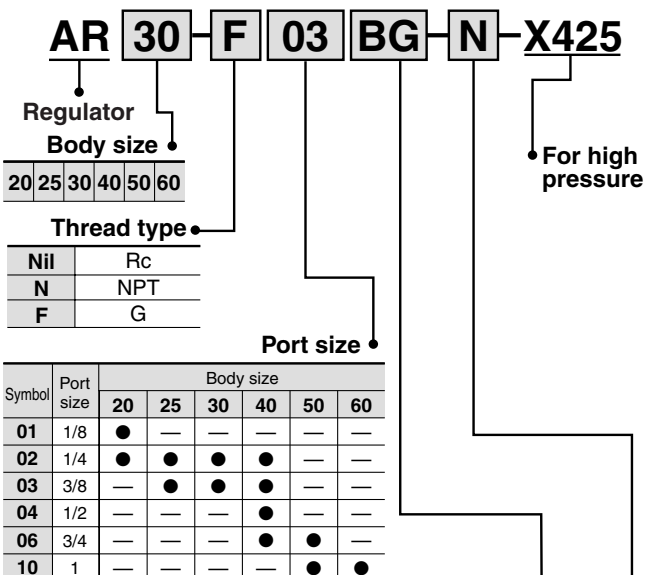

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AR20 to 60
G ⁽²⁾	With round pressure gauge (With limit indicator)	AR20 to 60
H	With set nut (For panel mount)	AR20 to 40

- Note 1) Optional parts are not assembled and are supplied loose at the time of shipment.
 Note 2) Mounting thread for pressure gauge: 1/8 for AR20 to 30; 1/4 for AR40 to 60

Symbol	Description	Applicable model
N	Non-relieving	AR20 to 60
R	Flow direction: Right → Left	AR20 to 60
Y	Upward handle	AR20 to 60
Z ⁽³⁾	Name plate and pressure gauge in imperial units (PSI, °F)	AR20 to 60

- * When more than one specification is required, indicate in ascending alphanumeric order.
 Note 3) For thread type NPT.
 This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Regulator *Series AR20(K) to AR60(K)* Made to Order Specifications:

Please contact SMC for detailed dimensions, specifications, and lead times.

3. With Digital Pressure Switch

Digital pressure switch (ISE30-□□-□□-□L) is supplied loose for mounting on pressure gauge connection port.

Specifications

Part no.		-X465
Pressure switch	Model	ISE30-□□-□□-□L
	Set pressure range (MPa)	-0.1 to 1
	Set and display resolution (MPa)	0.001
	Power supply voltage	12 to 24 VDC ± 10%, Ripple (p-p) 10% or less (With power supply polarity protection)
	Power consumption	45 mA or less (70 mA or less for current output)

* Pressure gauge port size: 1/8

Applicable Model

Model	AR20(K)	AR25(K)	AR30(K)	AR40(K)	AR40(K)-06	AR50(K)	AR60(K)
Port size	1/8, 1/4	1/4, 3/8	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1



F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□


VY1

G

PPA

AL

How to Order

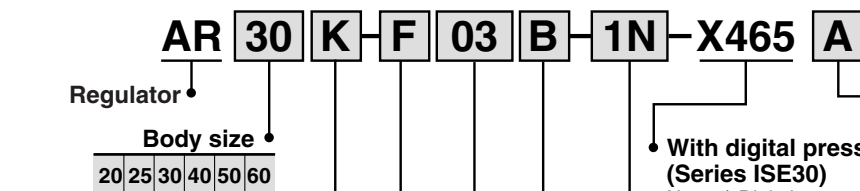

Back flow mechanism

Nil	Without back flow mechanism
K	With back flow mechanism

Thread type

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Body size					
		20	25	30	40	50	60
01	1/8	●	—	—	—	—	—
02	1/4	●	●	●	●	—	—
03	3/8	—	●	●	●	—	—
04	1/2	—	—	—	●	—	—
06	3/4	—	—	—	●	●	—
10	1	—	—	—	—	●	●

Switch specifications

Symbol	Output specifications
A	NPN output
B	PNP output
C	1 to 5 V output
D	4 to 20 mA output

With digital pressure switch (Series ISE30)

Note 4) Digital pressure switch is not assembled and are supplied loose at the time of shipment.

Note 5) Please consult with SMC for detailed dimensions and available attachments and options.

Note 6) Refer to SMC catalog CAT.ES100-42 for detailed specifications and instructions of digital pressure switch.

Option

Symbol	Description	Applicable model
1 ⁽²⁾	0.02 to 0.2 MPa setting	AR20(K) to 60(K)
N	Non-relieving type	AR20(K) to 60(K)
R	Flow direction: Right → Left	AR20(K) to 60(K)
Y	Upward handle	AR20(K) to 60(K)
Z ⁽³⁾	Name plate and pressure gauge in imperial units (PSI, °F)	AR20(K) to 60(K)



* When more than one specification is required, indicate in ascending alphanumeric order.

Note 2) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 3) For thread type NPT.

This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Option (1)

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AR20(K) to 60(K)
H	With set nut (For panel mount)	AR20(K) to 40(K)



Note 1) Optional parts are not assembled and are supplied loose at the time of shipment.

Regulator with Back Flow Mechanism

Series AR20K to 60K

How to Order

Regulator with a built-in mechanism that ensures a quick release of the outlet air pressure (built-in check valve with back flow mechanism).




AR20K



AR40K


Example 1)
When the pressure in the rear and the front of the cylinder differs:

Circuit diagram



Example 2)
When the air supply is cut off and releasing the inlet pressure to the atmosphere, the residual pressure release of the outlet side can be ensured for a safety purpose.

Circuit diagram



AR 30 K — F 03 BE — 1N

Regulator

Body size

20 25 30 40 50 60

With back flow mechanism

Note) AR10 comes with a back flow mechanism as a standard feature. If the set pressure is below 0.15 MPa, back flow may not occur. When a backflow mechanism is required with a set pressure of less than 0.15 MPa, please contact SMC.


Thread type

Nil	Rc
N	NPT
F	G

Port size

Symbol	Port size	Body size					
		20	25	30	40	50	60
01	1/8	●	—	—	—	—	—
02	1/4	●	●	—	—	—	—
03	3/8	—	●	●	—	—	—
04	1/2	—	—	●	—	—	—
06	3/4	—	—	—	●	●	—
10	1	—	—	—	—	●	●

JIS Symbol



Option

Symbol	Description	Applicable model
1 ⁽²⁾	0.02 to 0.2 MPa setting	AR20K to 60K
N	Non-relieving	AR20K to 60K
R	Flow direction: Right → Left	AR20K to 60K
Y	Upward handle	AR20K to 60K
Z ⁽³⁾	Name plate and pressure gauge in imperial units (PSI, °F)	AR20K to 60K

* When more than one specification is required, indicate in alphanumeric order.

Note 2) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 3) For NPT thread type.

This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Accessory⁽¹⁾

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AR20K to 60K
E	With square embedded type pressure gauge (With limit indicator)	AR20K to 60K
G	With round pressure gauge (With limit indicator)	AR20K to 60K
H	With set nut (For panel mount)	AR20K to 40K

Note 1) Optional parts are not assembled and are supplied loose at the time of shipment (except option E).

Standard Specifications

Model	AR20K	AR25K	AR30K	AR40K	AR40K-06	AR50K	AR60K
Port size	1/8, 1/4	1/4, 3/8	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1
Fluid	Air						
Proof pressure	1.5 MPa						
Maximum operating pressure	1.0 MPa						
Set pressure range ⁽¹⁾	0.05 to 0.85 MPa						
Pressure gauge port size ⁽²⁾	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/4	Rc, NPT, G 1/4	Rc, NPT, G 1/4	Rc, NPT, G 1/4
Relief pressure	Set pressure + 0.05 MPa (at relief flow rate of 0.1 ℓ/min (ANR))						
Ambient and fluid temperature	-5° to 60°C (With no freezing)						
Construction	Relieving type						
Weight (kg)	0.26	0.21	0.30	0.45	0.48	1.17	1.22

* AR10 comes with a back flow mechanism as a standard feature.

Note 1) Set the inlet pressure 0.05 MPa or higher than the set pressure.

Note 2) Pressure gauge connection threads are not required for regulators with a square embedded type pressure gauge (AR20K to AR60K).

Accessory Part No.

Accessory	Applicable model	AR20K	AR25K	AR30K	AR40K	AR40K-06	AR50K	AR60K	
Bracket assembly ⁽¹⁾		AR20P-270AS	AR25P-270AS	AR30P-270AS	AR40P-270AS	AR40P-270AS	AR50P-270AS ⁽³⁾	AR50P-270AS ⁽³⁾	
Set nut		AR20P-260S	AR25P-260S	AR30P-260S	AR40P-260S	AR40P-260S	— ⁽⁵⁾	— ⁽⁵⁾	
Pressure gauge ⁽²⁾	1.0 MPa	Round type	G36-10-□01	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02	G46-10-□02	
		Square embedded type ⁽⁴⁾	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS
	0.2 MPa	Round type	G36-2-□01	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02	G46-2-□02	G46-2-□02
		Square embedded type ⁽⁴⁾	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS

Note 1) Assembly includes a bracket and set nuts.

Note 2) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT. Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.


Note 3) Assembly includes a bracket and 2 mounting screws.

Note 4) Includes one O-ring and 2 mounting screws.

Note 5) Please contact SMC regarding the set nut for AR50K and 60K.

Regulator with Back Flow Mechanism Series AR20K to 60K

Working Principle

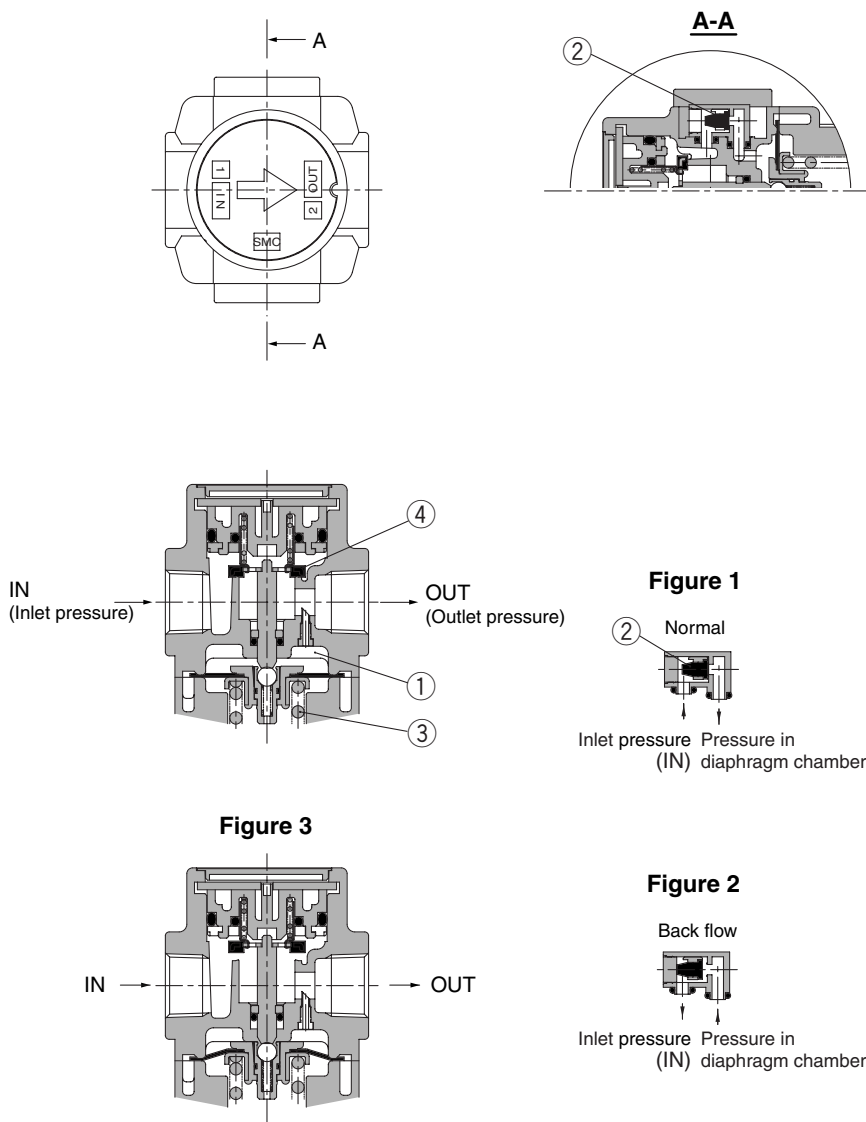

When the inlet pressure (P_1) is higher than the regulating pressure, the check valve ② closes and operates as a normal regulator (Figure 1).

When the inlet pressure (P_1) is shut off and released, the check valve ② opens and the pressure in the diaphragm chamber ① is released into the inlet side (Figure 2).

This lowers the pressure in the diaphragm chamber ① and the force generated by the pressure regulator spring ③ lifts the diaphragm. Valve ④ opens through the stem, and the outlet pressure is released to the inlet side (Figure 3).

⚠ Precautions

Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Mounting & Adjustment

⚠ Warning

1. Set the regulator while verifying the displayed values of the inlet and outlet pressure gauges. Turning the regulator knob excessively can cause damage to the internal parts.
2. Do not use tools on the pressure regulator knob as this may cause damage. It must be operated manually.

⚠ Caution

1. Be sure to unlock the knob before adjusting the pressure and lock it after setting the pressure.

Failure to follow this procedure can cause damage to the knob and the outlet pressure may fluctuate.



- Pull the pressure regulator knob to unlock. (You can visually verify this with the "orange mark" that appears in the gap.)
 - Push the pressure regulator knob to lock. When the knob is not easily locked, turn it left and right a little and then push it (when the knob is locked, the "orange mark", i.e., the gap will disappear).
2. A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 for details.

Maintenance

⚠ Warning

1. When using the regulator between a solenoid valve and an actuator, check the pressure gauge periodically. Sudden pressure fluctuations may shorten the durability of the pressure gauge. A digital pressure gauge is recommended for such situation or as deemed necessary.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL


Series AR20K to 60K

Flow Characteristics (Representative values)

Condition: Inlet pressure 0.7 MPa


AR20K

Rc 1/4

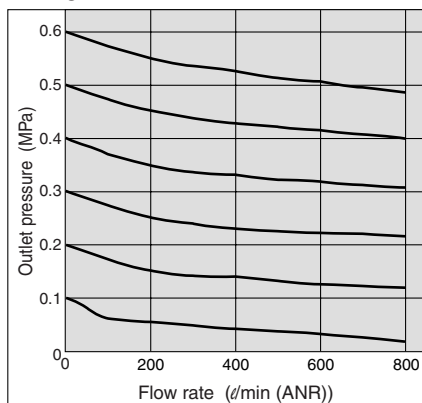


AR40K-06

Rc 3/8

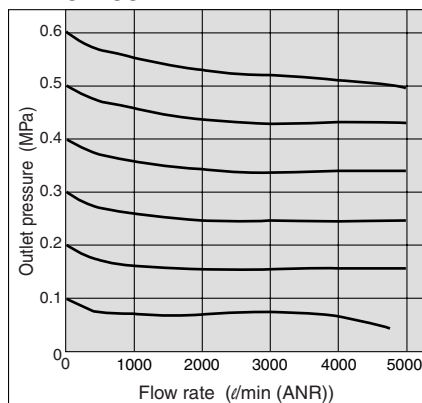


AR25K

Rc 3/8

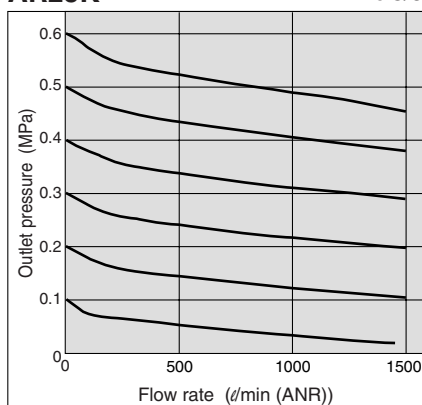


AR50K

Rc 1

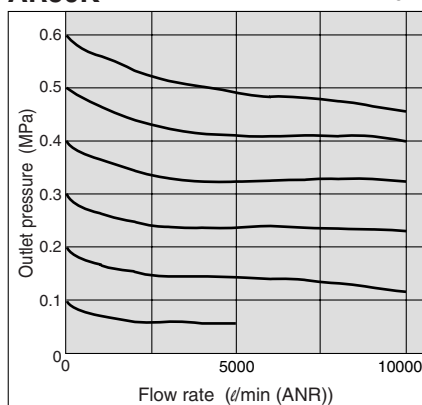


AR30K

Rc 3/8

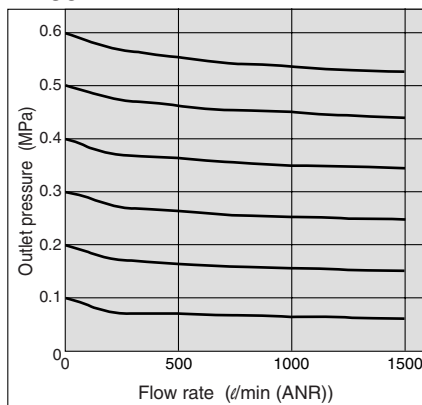


AR60K

Rc 1

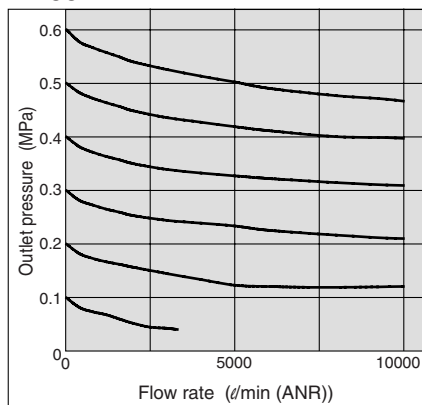

AR40K

Rc 1/2

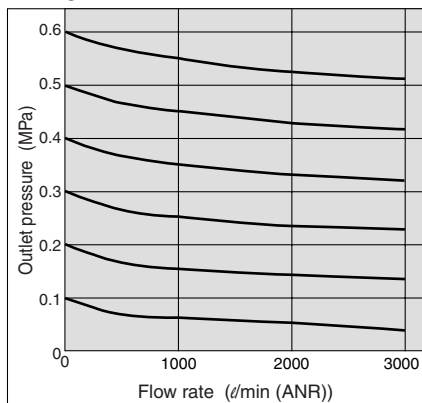


Regulator with Back Flow Mechanism Series AR20K to 60K


Pressure Characteristics (Representative values)

Conditions:
 Inlet pressure 0.7 MPa
 Outlet pressure 0.2 MPa
 Flow rate 20 l/min (ANR)


AR20K

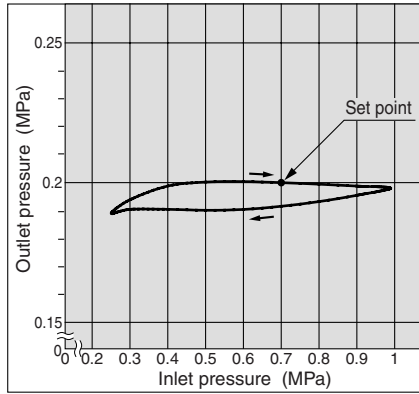


AR40K-06

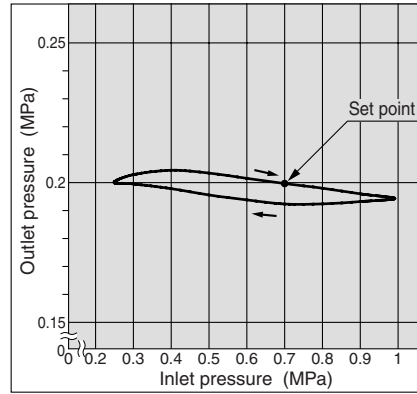


AR25K

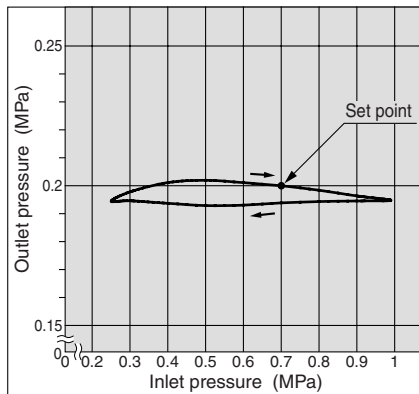


AR50K

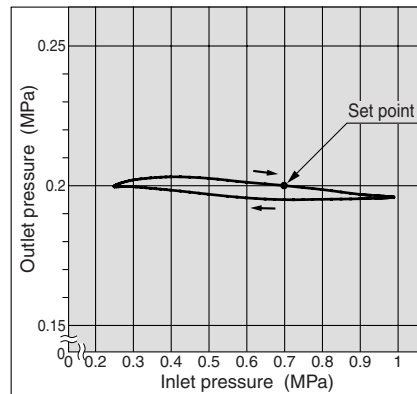


AR30K

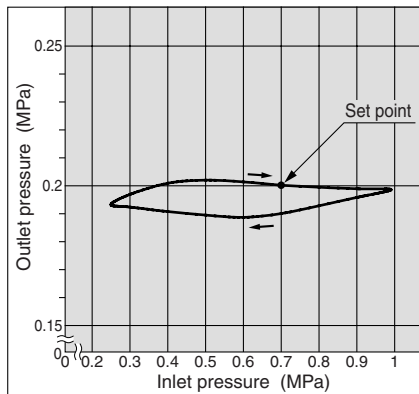

AR60K

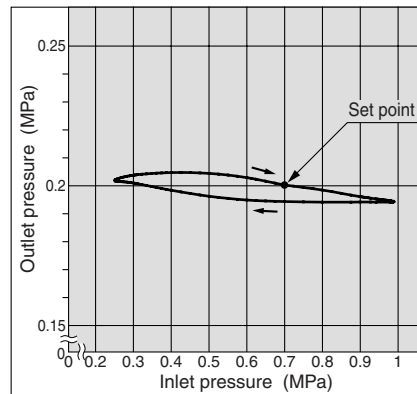

AR40K

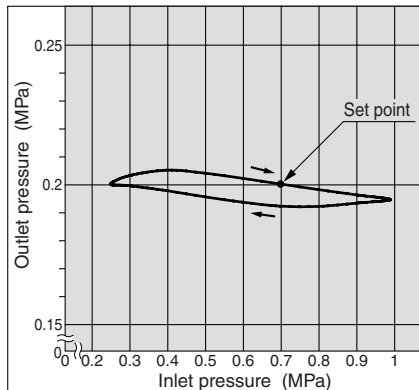

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G


PPA

AL

Series AR20K to 60K

Construction

AR20K to 60K

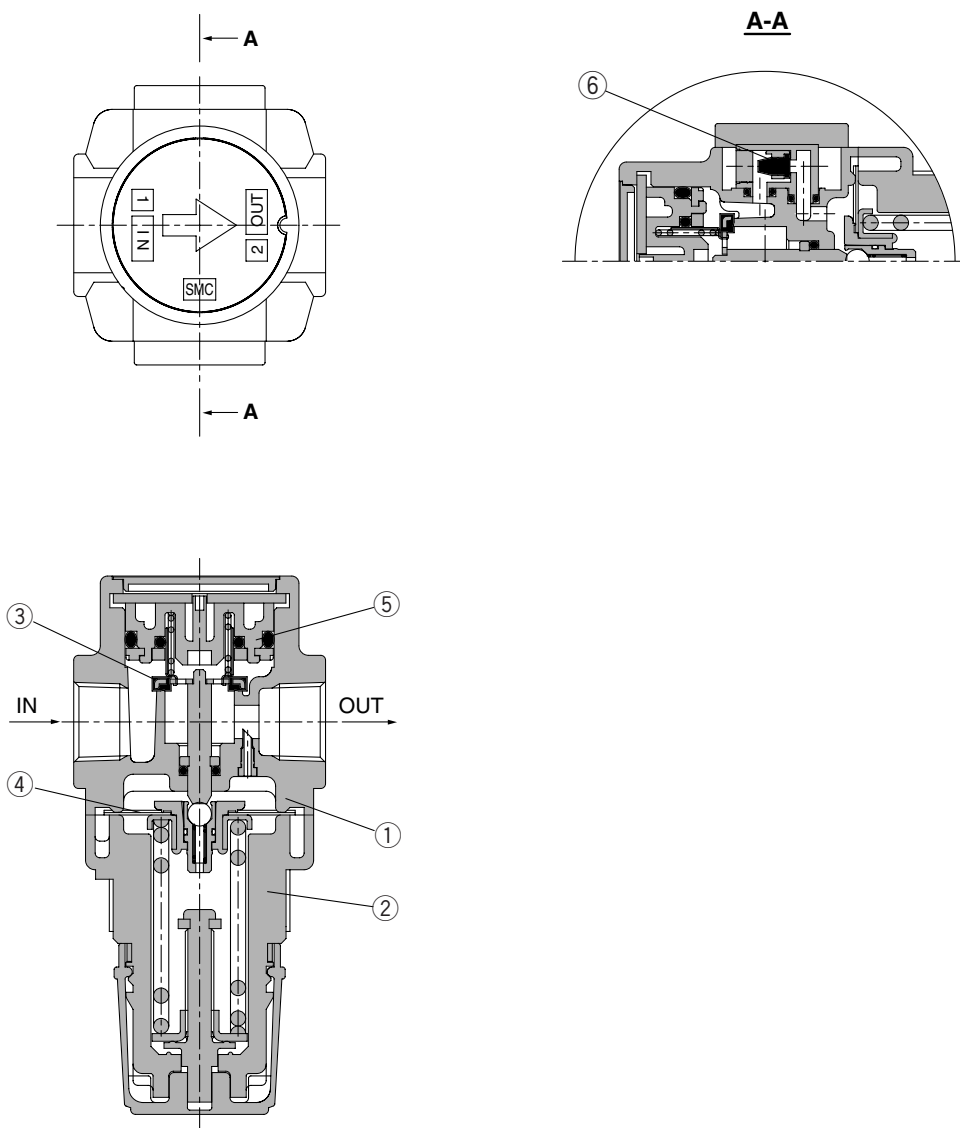

Component Parts

No.	Description	Material			Note
		AR20K	AR25K to 40K(-06)	AR50K/60K	
①	Body	Zinc die-casted	Aluminum die-casted		Platinum silver
②	Bonnet	Polyacetal		Aluminum die-casted	Black

Replacement Parts

No.	Description	Material	Part no.						
			AR20K	AR25K	AR30K	AR40K	AR40K-06	AR50K	AR60K
③	Valve assembly	Stainless steel Brass, HNBR	AR20P-410AS ⁽²⁾	AR25P-410AS ⁽²⁾	AR30P-410AS ⁽²⁾	AR40P-410AS ⁽²⁾	AR40P-410AS ⁽²⁾	AR50P-410AS ⁽²⁾	AR60P-410AS ⁽²⁾
④	Diaphragm assembly	Weatherability NBR	AR20P-150AS	AR25P-150AS	AR30P-150AS	AR40P-150AS	AR40P-150AS	AR50P-150AS	AR50P-150AS
⑤	Valve guide assembly	POM	AR20P-050AS	AR25P-050AS	AR30P-050AS	AR40P-050AS	AR40P-050AS	AR50P-050AS	AR60P-050AS
⑥	Check valve assembly ⁽¹⁾	—	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS

Note 1) Check valve construction includes a check valve cover and 2 screws.


Note 2) Assembly includes valve, valve spring and stem assembly.



Regulator with Back Flow Mechanism Series AR20K to 60K


Dimensions

AR20K to 40K

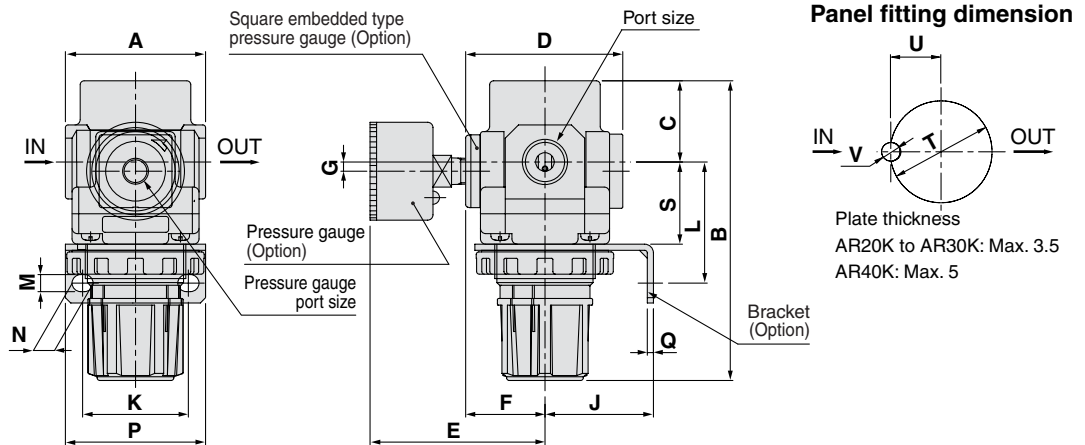

Panel fitting dimension
 IN V
 OUT
 Plate thickness
 AR20K to AR30K: Max. 3.5
 AR40K: Max. 5

AR50K/60K

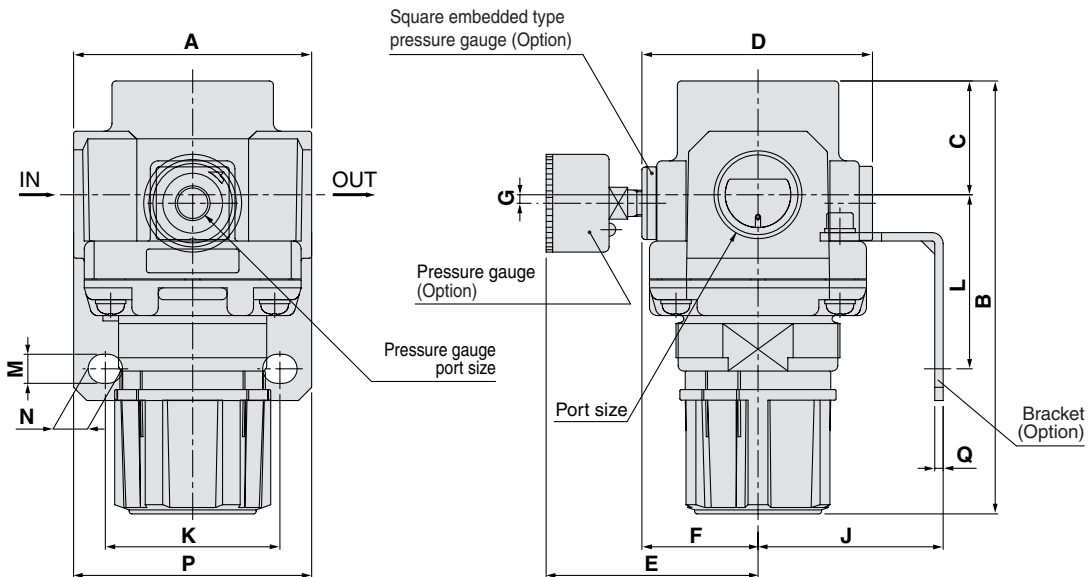


- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE □
- VY1
- G
- PPA
- AL

(mm)

Model	Port size	Standard specifications			Accessory specifications														
					With pressure gauge			Bracket mounting size								Panel mount			
		A	B	C	D	E	F	G	J	K	L	M	N	P	Q	S	T	U	V
AR20K	1/8, 1/4	40	94	26.5	57	65	29.5	2 ^{Note)}	30	34	44	5.4	15.4	55	2.3	25	28.5	14	6
AR25K	1/4, 3/8	53	101	28	55	64	28.5	0	30	34	44	5.4	15.4	55	2.3	26	32.5	16	6
AR30K	1/4, 3/8	53	116	31	59	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7
AR40K	1/4, 3/8, 1/2	70	128	36	68	74	35	3.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7
AR40K-06	3/4	75	129	36	68	74	35	3	50	54	56	8.5	10.5	70	2.3	37	42.5	21	7
AR50K	3/4, 1	90	169	43	87	84	44.5	3.3	70	66	65.8	11	13	90	3.2	—	—	—	—
AR60K	1	95	176	46	87	84	44.5	3.3	70	66	65.8	11	13	90	3.2	—	—	—	—

Note) For AR20K only, the position of the pressure gauge is above the center of the piping.

Modular Style Lubricator *Series AL*

Lubricator <i>Series AL</i>	Model	Port size	Accessory
 <p data-bbox="113 898 400 922">Pages 14-2-61 to 14-2-65</p>	AL10	M5 x 0.8	Bracket
	AL20	1/8, 1/4	
	AL30	1/4, 3/8	
	AL40	1/4, 3/8, 1/2	
	AL40-06	3/4	
	AL50	3/4, 1	
	AL60	1	

Lubricator

Series AL10 to 60

How to Order

Lubricator		Body size						Thread type		Port size		Option	
AL		30						F		03		B-2R	
Symbol		Description						Applicable model					
1		1000 cm ³ tank						AL30 to 60					
10		1000 cm ³ tank with level switch (Lowest limit ON)						AL30 to 60					
11		1000 cm ³ tank with level switch (Lowest limit OFF)						AL30 to 60					
2		Metal bowl						AL10 to 60					
3		With drain cock						AL10 to 60					
6		Nylon bowl (Including sight dome)						AL10 to 60					
8		Metal bowl with level gauge						AL30 to 60					
C		With bowl guard						AL20					
R		Flow direction: Right → Left						AL10 to 60					
3W		Drain cock with barb fitting: ø6 x ø4 nylon tubing						AL30 to 60					
Z ⁽²⁾		Name plate and caution plate for bowl in imperial units (PSI, °F)						AL10 to 60					

Nil		Metric thread (M5)					
N		Rc					
F		NPT					
		G					

Symbol		Port size		Body size					
M5		M5		10 20 30 40 50 60					
01		1/8		● — — — — —					
02		1/4		— ● — — — — —					
03		3/8		— — ● — — — —					
04		1/2		— — — ● — — —					
06		3/4		— — — — — ● —					
10		1		— — — — — — ●					

Symbol		Description		Applicable model	
Nil		—		—	
B ⁽¹⁾		With bracket		AL20 to AL60	

Note 1) Bracket is not assembled and is supplied loose at the time of shipment.


Note 2) For M5 and NPT thread types. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

AL20



AL40

JIS Symbol



Accessory/Optional Specifications Combinations

Accessory/Optional specifications	Combination	Symbol	Optional specifications											Applicable lubricator				
			B	1	10	11	2	3	6	8	C	R	3W	Z	AL10	AL20	AL30 to 60	
Accessory	With bracket	B	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Optional specifications	1000 cm ³ tank	-1	◎													△		◎
	1000 cm ³ tank with level switch (Lowest limit ON)	-10	◎													△		◎
	1000 cm ³ tank with level switch (Lowest limit OFF)	-11	◎													△		◎
	Metal bowl	-2	◎					◎								△		◎
	With drain cock	-3	◎					◎								△		◎
	Nylon bowl (Including sight dome)	-6	◎					◎								△		◎
	Metal bowl with level gauge	-8	◎					◎								△		◎
	With bowl guard	-C	◎					◎								△		◎
	Flow direction: Right → Left	-R	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	△	◎	◎
	Drain cock with barb fitting: ø6 x ø4 nylon tubing	-3W	◎						◎							△		◎
Name plate and caution plate for bowl in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	

Note) -1, -10, -11 are for a metal bowl with level gauge that comes with drain cock.

Standard Specifications

Model	AL10	AL20	AL30	AL40	AL40-06	AL50	AL60
Port size	M5 x 0.8	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2	3/4	3/4, 1	1
Fluid	Air						
Proof pressure	1.5 MPa						
Maximum operating pressure	1.0 MPa						
Minimum dripping flow rate (d/min (ANR))	4	15	1/4: 30 3/8: 40	1/4: 30 3/8: 40 1/2: 50	50	190	220
Oil capacity (cm ³)	7	25	55	135	135	135	135
Recommended lubricant	Class 1 turbine oil (ISO VG32)						
Ambient and fluid temperature	-5 to 60°C (With no freezing)						
Bowl material	Polycarbonate						
Bowl guard	—	Option	Standard				
Weight (kg)	0.07	0.20	0.24	0.47	0.52	1.06	1.13

Note 1) • The flow rate is 5 drips/min under the following conditions: Inlet pressure of 0.5 MPa; Class 1 turbine oil (ISO VG32); Temperature at 20°C; Oil adjustment valve fully open.
• Use air consumption flow rate for minimum dripping flow rate.

Accessory Part No.

Accessory	Applicable model	AL10	AL20	AL30	AL40	AL40-06	AL50	AL60
Bracket assembly	Note)	—	AF20P-050AS	AF30P-050AS	AF40P-050AS	AF40P-070AS	AF50P-050AS	AF50P-050AS

* The part number for bracket assembly for 1000 cm³ is AF50P-050AS (applicable to AL30 to AL60).
Note) Assembly includes a bracket and 2 mounting screws.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA


AL

Series AL10 to 60


Flow Characteristics (Representative values)

Condition: Inlet pressure 0.7 MPa


AL10 M 5

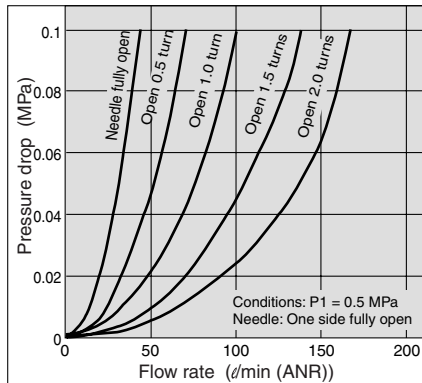


AL40-06 Rc 3/4

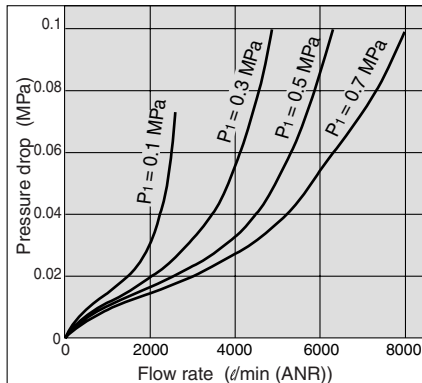


AL20 Rc 1/4

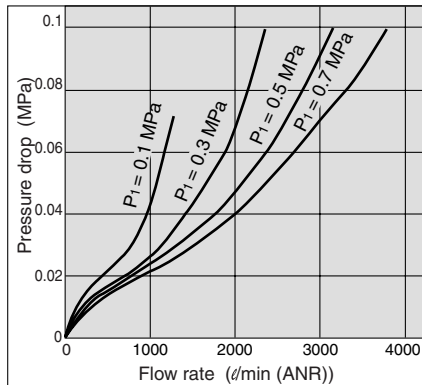


AL50 Rc 1

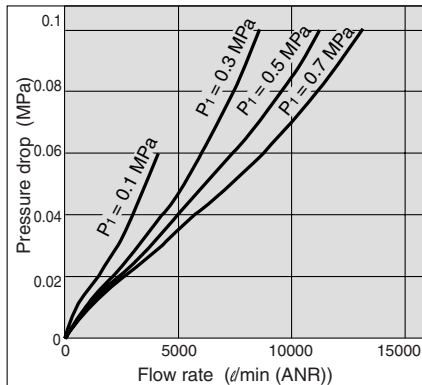


AL30 Rc 3/8

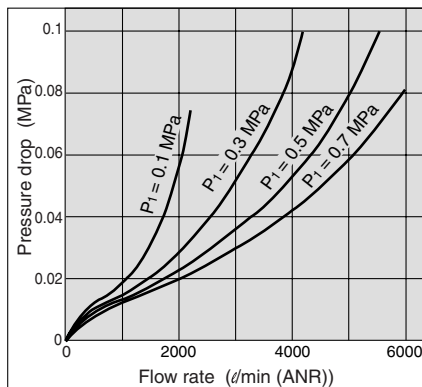


AL60 Rc 1

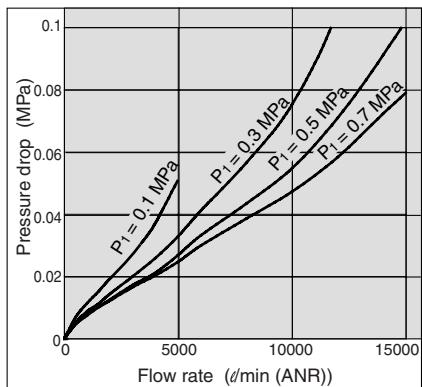

AL40 Rc 1/2

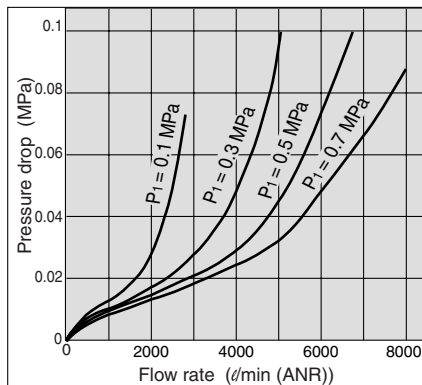

Working Principle: Type AL10

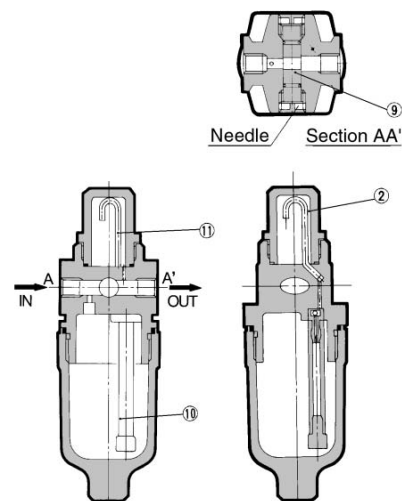

A portion of the air introduced from the IN side pressurizes the lubricant inside the bowl. The remainder of the air passes through the needles (9), and flows to the OUT side. The pressure differential between the inside of the bowl and the inside of the sight dome (2), causes the lubricant inside the bowl into the oil passage (10). The lubricant drips from the dripping tube (11), and lubricate the OUT side. The amount of lubricant is adjusted by the needle (9), on the front face. Turning the needle clockwise increases the amount of the lubricant, and turning it counterclockwise until fully opened shuts off the lubricant. The needle on the side that is not used should be left fully opened.

Note) The operating principle for AL20 to 60 types is different from that of AL10

⚠ Precautions

Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Selection

⚠ Warning

- Do not introduce air from the outlet side as this can damage the damper.

⚠ Caution

- Use a check valve (Series AKM) to prevent back flow of the lubricant when redirecting the air flow before the lubricator.

Maintenance

⚠ Warning

- For AL 10 and AC20 type, replenish the lubricant after releasing the inlet pressure. Lubrication cannot take place under a pressurized condition.

⚠ Caution

- Check the dripping amount once a day. Drip failure can cause damage to the components that need lubrication.


Lubricator Series AL10 to 60

Construction


JIS Symbol




AL10




AL20

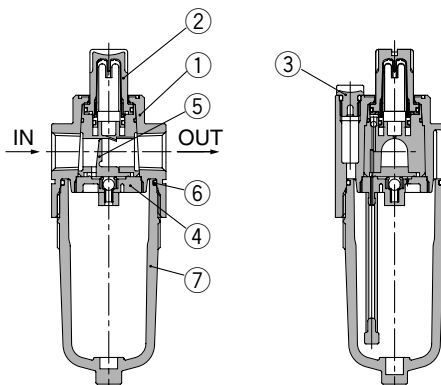

AL30/40

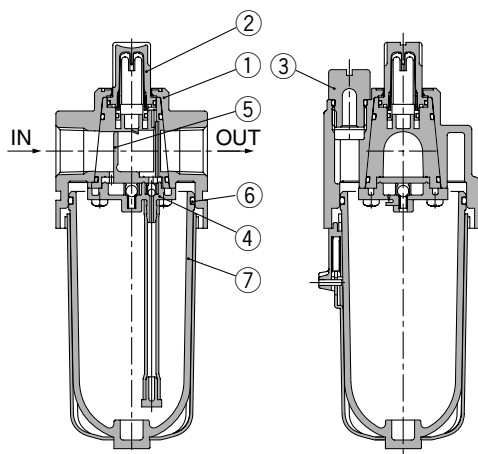

AL50/60

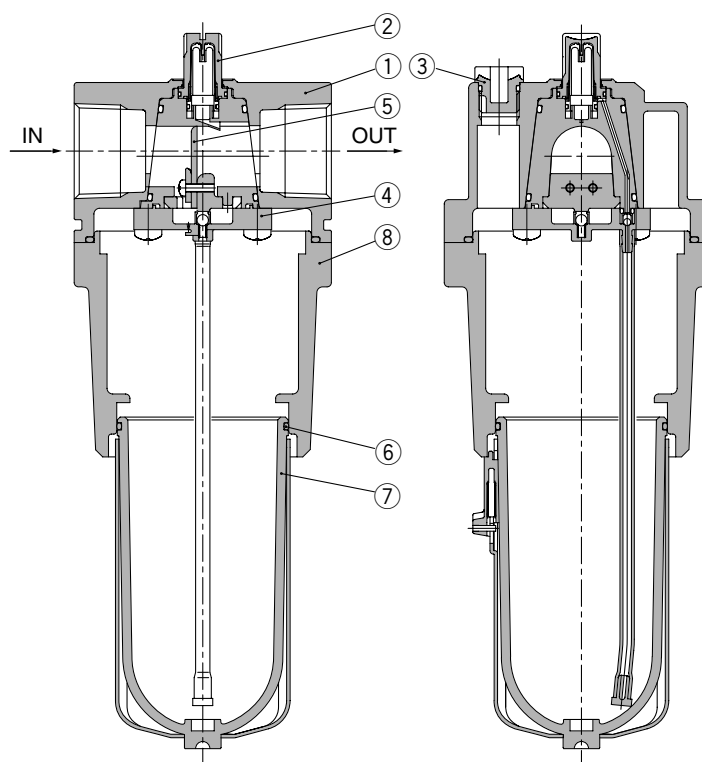

Component Parts

No.	Description	Material			Note
		AL10/20	AL30/40/40-06	AL50/60	
①	Body	Zinc die-casted	Aluminum die-casted		Platinum silver
⑧	Housing	—		Aluminum die-casted	Platinum silver

Replacement Parts

No.	Description	Material	Part no.						
			AL10	AL20	AL30	AL40	AL40-06	AL50	AL60
②	Sight dome assembly	PC	AL10P-080AS	AL20P-080AS	AL20P-080AS	AL20P-080AS	AL20P-080AS	AL20P-080AS	AL20P-080AS
③	Lubrication plug assembly	—	—	AL20P-060AS	AL30P-060AS	AL40P-060AS	AL40P-060AS	AL40P-060AS	AL40P-060AS
④	Damper retainer assembly ⁽¹⁾	—	—	AL20P-030AS	AL30P-030AS	AL40P-030AS	AL40P-030AS	AL50P-030AS	AL60P-030AS
⑤	Damper assembly	Synthetic resin	—	AL20P-040S	AL30P-040S	AL40P-040S	AL40P-040S	AL50P-040AS	AL60P-040AS
⑥	Bowl O-ring	NBR	C1SFP-260S	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S	C4SFP-260S	C4SFP-260S
⑦	Bowl assembly ⁽²⁾	PC	C1SL	C2SL	C3SL ⁽³⁾	C4SL ⁽³⁾	C4SL ⁽³⁾	C4SL ⁽³⁾	C4SL ⁽³⁾

Note 1) Add "-1" at the end of the part number when ordering a damper retainer assembly for 1000 cm³.

Example) AL30P-030AS-1

Note 2) Including O-ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.

Note 3) Bowl assembly for AL30 to AL60 comes with a bowl guard (steel band material).

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1


G

PPA

AL

Series AL10 to 60

Dimensions

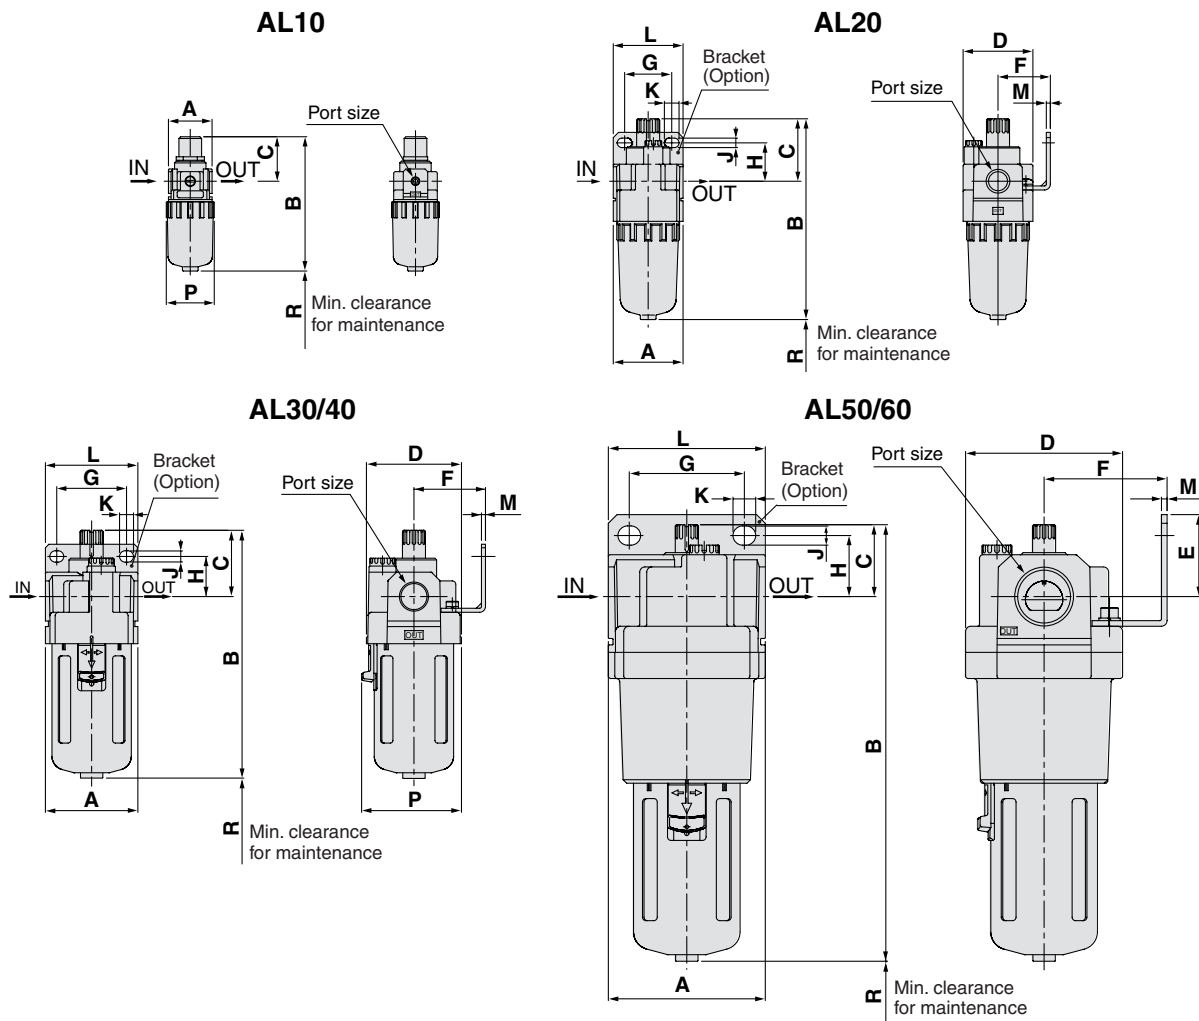

Applicable model	AL10, AL20		AL30, AL40, AL40-06, AL50, AL60					
	With drain cock	Metal bowl with drain cock	Metal bowl	With drain cock	Metal bowl with level gauge	Metal bowl with drain cock	Metal bowl with drain cock & level gauge	Drain cock with barb fitting
Optional specifications								

(mm)


Model	Port size	Standard specifications						Accessory specifications							
		A	B	C	D	P	R	Bracket mounting size							
		E	F	G	H	J	K	L	M						
AL10	M5 x 0.8	25	77	26	25	28	35	—	—	—	—	—	—	—	—
AL20	1/8, 1/4	40	115	36	40	—	60	—	30	27	22	5.4	8.4	40	2.3
AL30	1/4, 3/8	53	142	38	53	57	80	—	41	40	23	6.5	8	53	2.3
AL40	1/4, 3/8, 1/2	70	176	40	70	73	110	—	50	54	26	8.5	10.5	70	2.3
AL40-06	3/4	75	176	38	70	73	110	—	50	54	25	8.5	10.5	70	2.3
AL50	3/4, 1	90	250	41	90	—	110	47	70	66	35	11	13	90	3.2
AL60	1	95	268	45	95	—	110	47	70	66	35	11	13	90	3.2

Model	Optional specifications					
	With drain cock	With barb fitting	Metal bowl	Metal bowl with drain cock	Metal bowl with level gauge	Metal bowl with drain cock & level gauge
	B	B	B	B	B	B
AL10	85	—	82	85	—	—
AL20	123	—	121	124	—	—
AL30	153	161	142	166	162	186
AL40	187	195	176	200	196	220
AL40-06	187	195	176	200	196	220
AL50	261	269	250	274	270	294
AL60	279	287	268	292	288	312

Lubricator Series AL10 to 60

Dimensions

Option: 1000 cm³ tank

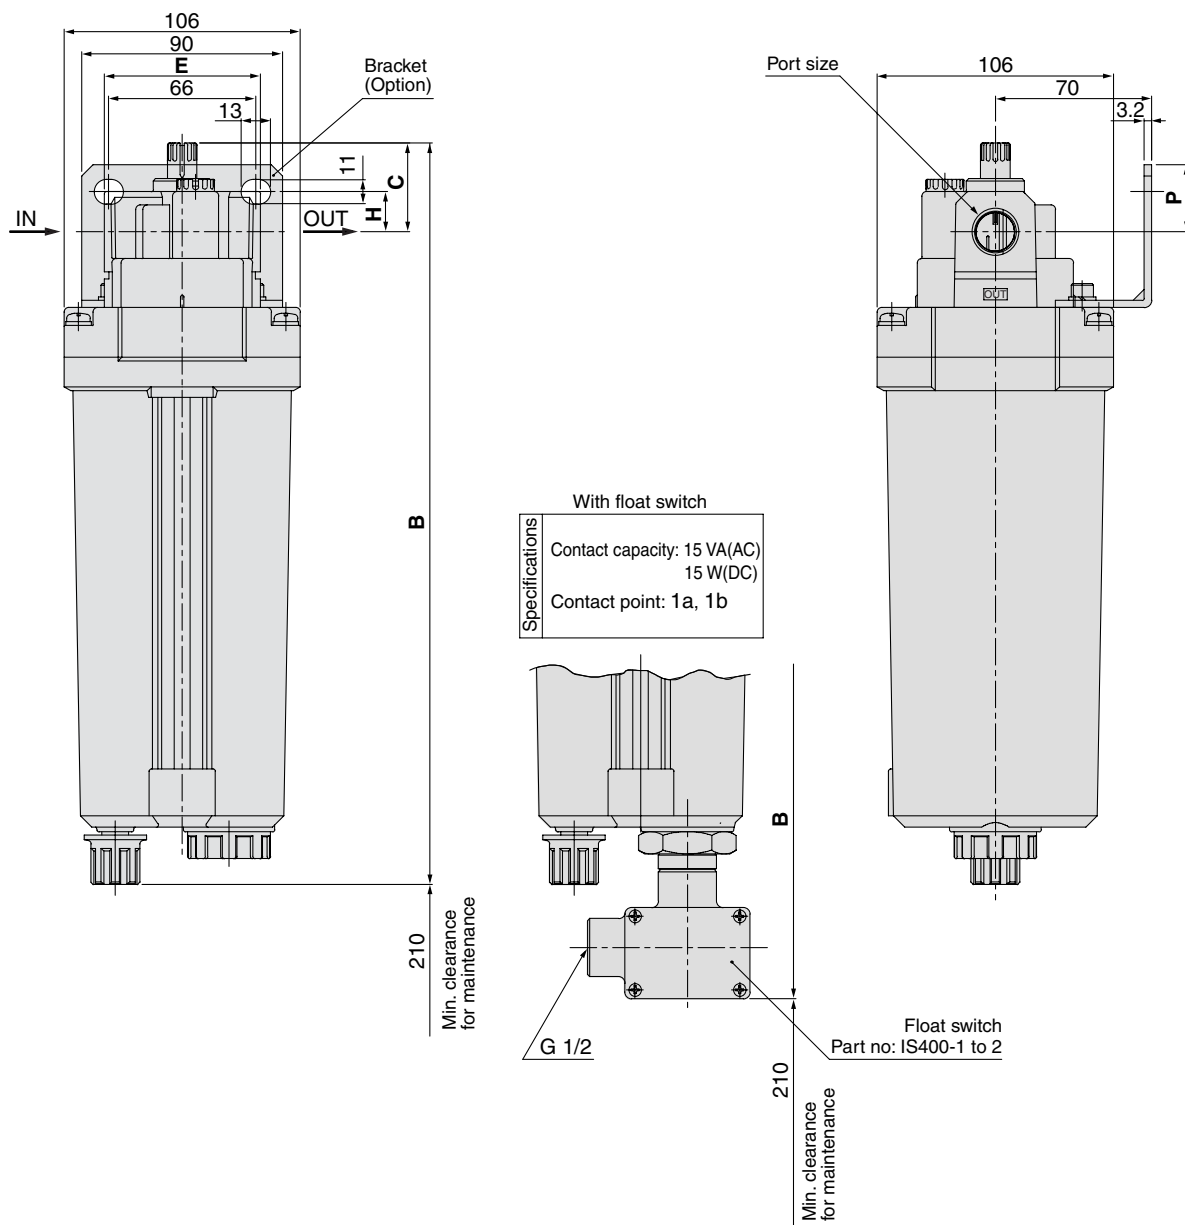

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G





PPA

AL

(mm)

Model	Port size	B	C	E	With bracket		With float switch
					H	P	B
AL30	1/4, 3/8	324	38	53	25	—	374
AL40	1/4, 3/8, 1/2	333	40	70	18	—	383
AL40-06	3/4	333	38	75	16	—	383
AL50	3/4, 1	332	41	90	35	47	382
AL60	1	335	45	95	35	47	385

Modular Style Filter Regulator Series AW

Filter regulator Series AW	Model	Port size	Filtration	Accessory
 Pages 14-2-67 to 14-2-73	AW10	M5 x 0.8	5 μm	
	AW20	1/8, 1/4		
	AW30	1/4, 3/8		
	AW40	1/4, 3/8, 1/2		
	AW40-06	3/4		
	 Pages 14-2-74 to 14-2-77	AW20K		
AW30K		1/4, 3/8		
AW40K		1/4, 3/8, 1/2		
AW40K-06		3/4		
 Pages 14-2-78 to 14-2-81	AWM20	1/8, 1/4	0.3 μm (95% filtered particle size)	Round pressure gauge Panel mount
	AWM30	1/4, 3/8		
	AWM40	1/4, 3/8, 1/2		
 Pages 14-2-82 to 14-2-85	AWD20	1/8, 1/4	0.01 μm (95% filtered particle size)	
	AWD30	1/4, 3/8		
	AWD40	1/4, 3/8, 1/2		


Filter Regulator

Series AW10 to 40

Integrated filter and regulator units save space and require less piping.

Direct operated, relieving type

JIS Symbol



P. 14-2-72



AW20



AW40

How to Order

AW 30 F 03 BE 1N

Filter regulator

Body size

10 20 30 40

Thread type

Nil	Metric thread (M5)
N (1)	Rc
F (2)	NPT
	G



Note 1) Drain guide is NPT 1/4 (applicable to AW30 and 40), and the exhaust port for auto-drain comes with $\phi 3/8$ " One-touch fitting (applicable to AW30 and AW40).

Note 2) Drain guide is G 1/4 (applicable to AW30 and AW40).

Port size

Symbol	Port size	Body size			
		10	20	30	40
M5	M5	●	—	—	—
01	1/8	—	●	—	—
02	1/4	—	●	●	●
03	3/8	—	—	●	●
04	1/2	—	—	—	●
06	3/4	—	—	—	●

Option

Symbol	Description	Applicable model
1 (5)	0.02 to 0.2 MPa setting	AW10 to 40
2	Metal bowl	AW10 to 40
6	Nylon bowl	AW10 to 40
8	Metal bowl with level gauge	AW30/40
C	With bowl guard	AW20
J (6)	Drain guide 1/4	AW30/40
N	Non-relieving	AW10 to 40
R	Flow direction: Right → Left	AW10 to 40
W	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	AW30/40
Z (7)	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	AW10 to 40



* When more than one specification is required, indicate in alphanumeric order.

Note 5) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 6) Without a valve function.

Note 7) For M5 and NPT thread types. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Accessory (3)

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AW10 to 40
C	Float type auto-drain (N.C.) (4)	AW10 to 40
D	Float type auto-drain (N.O.) (4)	AW30/40
E	With square embedded type pressure gauge (With limit indicator)	AW20 to 40
G	With round pressure gauge (Without limit indicator)	AW10
	With round pressure gauge (With limit indicator)	AW20 to 40
H	With set nut (For panel mount)	AW10 to 40



Note 3) Optional parts are not assembled and are supplied loose at the time of shipment (except options C, D and E).

Note 4) Applicable tubing O.D for auto drain connection should be $\phi 3/8$ " in case NPT thread port is chosen.

Accessory/Optional Specifications Combinations

⊙: Combination available

■: Combination not available

○: Varies depending on the model

△: Available only with NPT thread

Accessory/Optional specifications	Combination	Symbol	Accessory							Optional specifications							Applicable filter regulator				
			B	C	D	E	G	H	1	2	6	8	C	J	N	R	W	Z	AW10	AW20	AW30 to 40
Accessory	With bracket (With set nut)	B	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Float type auto-drain (N.C.)	C	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Float type auto-drain (N.O.)	D	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Square embedded type pressure gauge	E	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Round pressure gauge	G	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With set nut (For panel mount)	H	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Optional specifications	0.02 to 0.2 MPa setting	-1	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Metal bowl	-2	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Nylon bowl	-6	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Metal bowl with level gauge	-8	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	With bowl guard	-C	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Drain guide 1/4	-J	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Non-relieving type	-N	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Flow direction: Right → Left	-R	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	-W	⊙	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Series AW10 to 40

Standard Specifications

Model	AW10	AW20	AW30	AW40	AW40-06
Port sizes	M5 x 0.8	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2	3/4
Fluid	Air				
Proof pressure	1.5 MPa				
Maximum operating pressure	1.0 MPa				
Set pressure range	0.05 to 0.7 MPa	0.05 to 0.85 MPa			
Pressure gauge port size (1)	Rc 1/16 (2)	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/4	Rc, NPT, G 1/4
Relief pressure	Set pressure + 0.05 MPa (3) (at relief flow rate of 0.1 l/min (ANR))				
Ambient and fluid temperature	-5 to 60°C (With no freezing)				
Nominal filtration rating	5 µm				
Drain capacity (cm ³)	2.5	8	25	45	45
Bowl material	Polycarbonate				
Bowl guard	—	Option	Standard		
Construction	Relieving type				
Weight (kg)	0.09	0.32	0.40	0.72	0.75

Note 1) Pressure gauge connection threads are not required for regulators with a square embedded type pressure gauge (AW20 to AW40).

Note 2) Use a bushing (part no: 131368) when connecting R 1/8 pressure gauge to R 1/16 gauge port.

Note 3) Not applicable to AW10.

Accessory Part No.

Applicable model		AW10	AW20	AW30	AW40	AW40-06			
Accessory									
Bracket assembly (1)		AR10P-270AS	AW20P-270AS	AR30P-270AS	AR40P-270AS	AR40P-270AS			
Set nut		AR10P-260S	AR20P-260S	AR30P-260S	AR40P-260S	AR40P-260S			
Pressure gauge (2)	1.0 MPa	Round Type	G27-10-R1	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02		
		Square embedded type (4)	—	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS		
	0.2 MPa	Round Type	G27-10-R1 (3)	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02		
		Square embedded type (4)	—	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS		
Float type auto-drain (5)	N.O.	—	—	AD38	AD38N(6)	AD48	AD48N(6)	AD48	AD48N(6)
	N.C.	AD17	AD27	AD37	AD37N(6)	AD47	AD47N(6)	AD47	AD47N(6)

Note 1) Assembly includes a bracket and set nuts.

Note 2) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT. Please contact SMC regarding the connection thread NPT and supply of the pressure gauge for PSI unit specifications.

Note 3) For 1 MPa.

Note 4) Includes one O-ring and 2 mounting screws.

Note 5) Minimum operating pressure: N.O. type—0.1 MPa; N.C. type—0.1 MPa (AD17/27) and 0.15 MPa (AD37/47). Please contact SMC regarding the specifications for PSI unit and °F.

Note 6) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".

⚠ Precautions

Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Selection

⚠ Warning

- Residual pressure release (outlet pressure release) is not completed by releasing inlet pressure. To release residual pressure, use a filter regulator with a back flow mechanism.

Maintenance

⚠ Warning

- Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.

Mounting & Adjustment

⚠ Warning

- Set the regulator while checking the displayed values of the inlet and outlet pressure gauges. Turning the knob excessively can cause damage to the internal parts.
- The pressure gauge indicated with regulators for 0.02 to 0.2 MPa setting is for 0.2 MPa use only. Exceeding 0.2 MPa of pressure can damage the gauge.
- Do not use tools on the pressure regulator knob as this may cause damage. It must be operated manually.

⚠ Caution

- Be sure to unlock the knob before adjusting the pressure and lock it after setting the pressure. Failure to follow this procedure can cause damage to the knob and the outlet pressure may fluctuate.

- Pull the pressure regulator knob to unlock. (You can visually verify this with the "orange mark" that appears in the gap.)
- Push the pressure regulator knob to lock. When the knob is not easily locked, turn it left and right a little and then push it (when the knob is locked, the "orange mark" will disappear).




- A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 for details.

Filter Regulator Series AW10 to 40


Flow Characteristics (Representative values)

Condition: Inlet pressure 0.7 MPa


AW10 M5

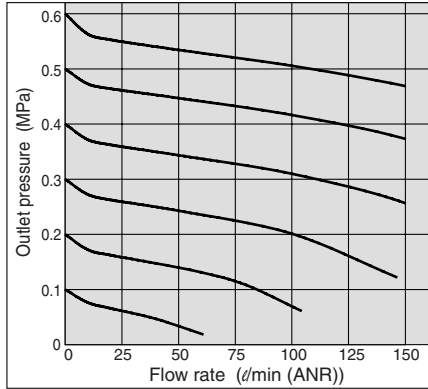


AW30 Rc 3/8

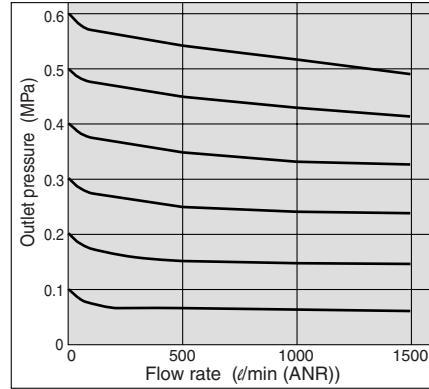


AW40-06 Rc 3/4

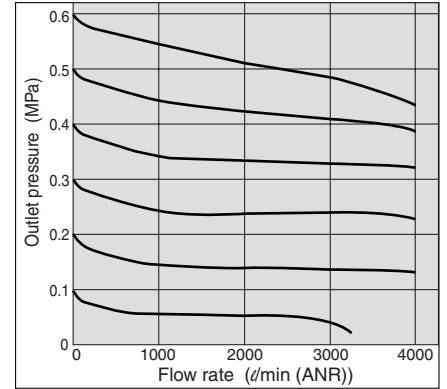

AW20 Rc 1/4

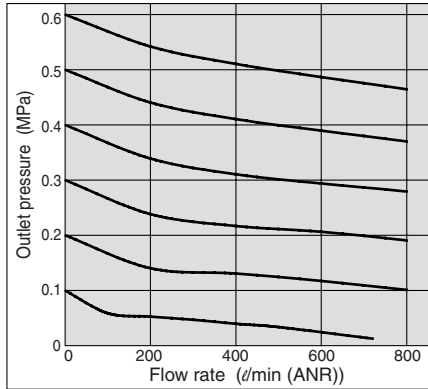


AW40 Rc 1/2

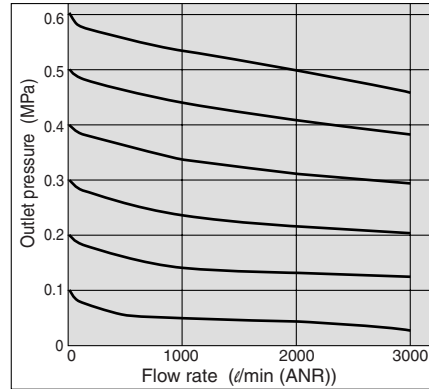


Pressure Characteristics (Representative value)

Conditions: Inlet pressure 0.7 MPa; Outlet pressure 0.2 MPa; Flow rate 20 l/min (ANR)


AW10

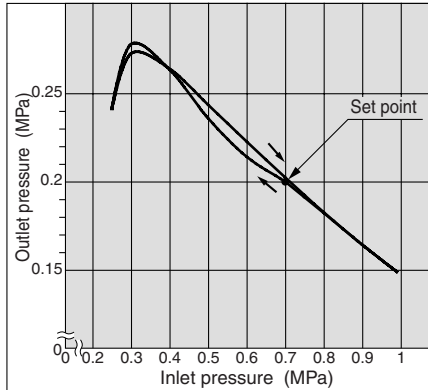


AW30

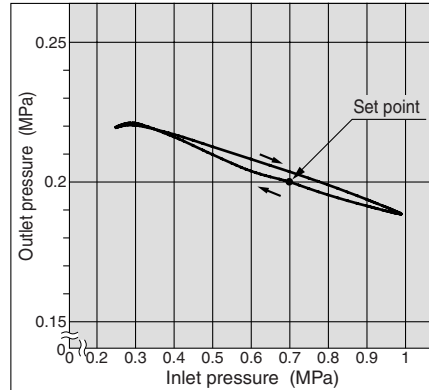


AW40-06

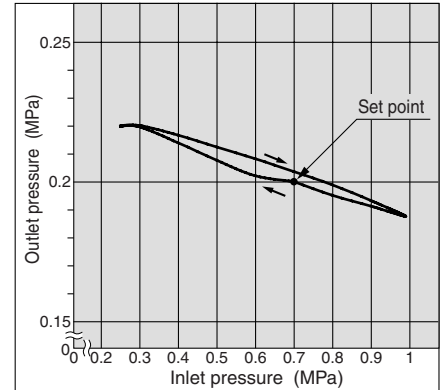

AW20

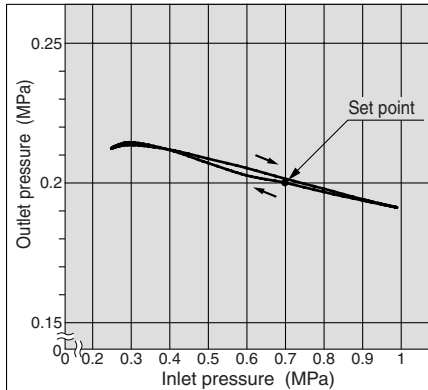

AW40

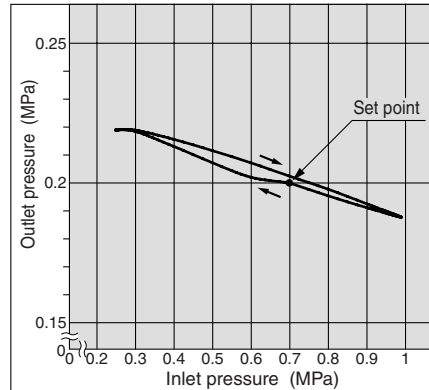

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE □

VY1

G


PPA

AL


Series AW10 to 40

Construction


JIS Symbol




AW10

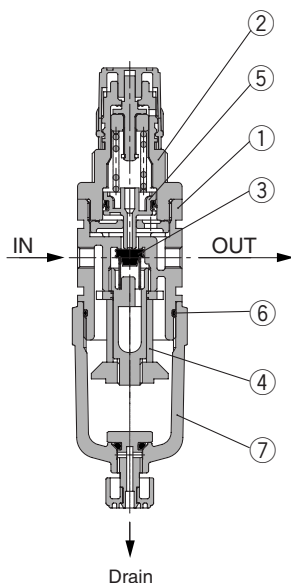

AW20

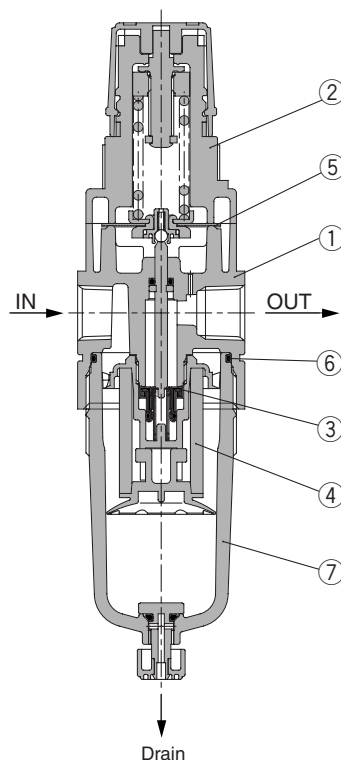

AW30/40

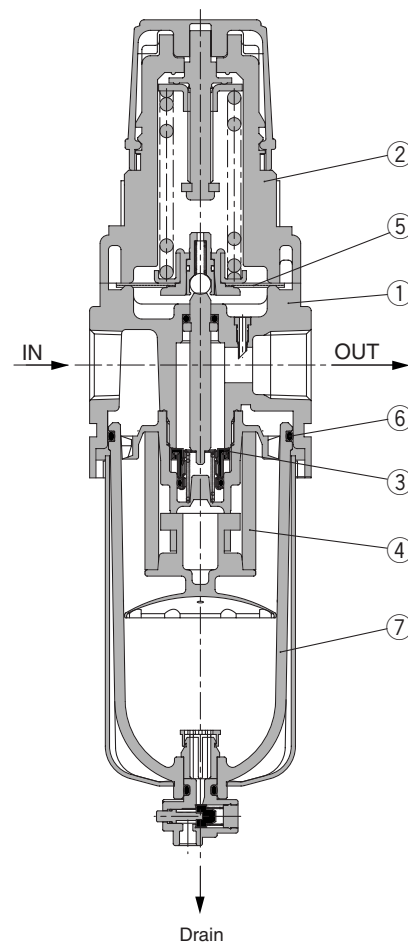

Component Parts

No.	Description	Material			Note
		AW10/20	AW30	AW40/40-06	
①	Body	Zinc die-casted	Aluminum die-casted		Platinum silver
②	Bonnet	Polyacetal			Black

Replacement Parts

No.	Description	Material	Part no.				
			AW10	AW20	AW30	AW40	AW40-06
③	Valve assembly	Stainless steel Brass, HNBR	AR10P-090S	AW20P-360AS ⁽⁴⁾	AW30P-360AS ⁽⁴⁾	AW40P-360AS ⁽⁴⁾	AW40P-380AS ⁽⁴⁾
④	Filter element	Non-woven fabric	AF10P-060S	AF20P-060S	AF30P-060S	AF40P-060S	AF40P-060S
⑤	Diaphragm assembly	Weatherability NBR	AR10P-150AS ⁽¹⁾	AR20P-150AS	AR30P-150AS	AR40P-150AS	AR40P-150AS
⑥	Bowl O-ring	NBR	C1SFP-260S	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S
⑦	Bowl assembly ⁽²⁾	PC	C1SF	C2SF	C3SF ⁽³⁾	C4SF ⁽³⁾	C4SF ⁽³⁾



Note 1) AW10 is a piston and a gasket (KSYP-13) type assembly.

Note 2) Including O-ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.


Note 3) Bowl assembly includes a bowl guard (steel band material).

Note 4) Assembly includes valve assembly, valve spring and stem assembly.

Filter Regulator Series AW10 to 40

Dimensions

AW10/20

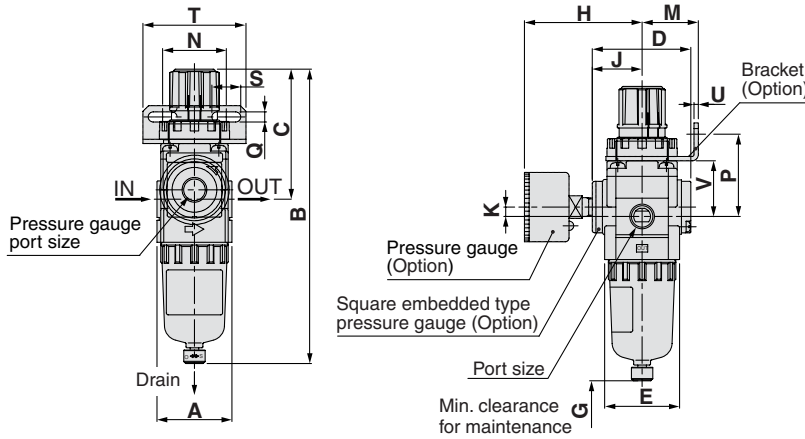

Panel fitting dimension





Plate thickness
AW10, AW20: Max. 3.5

AW30/40

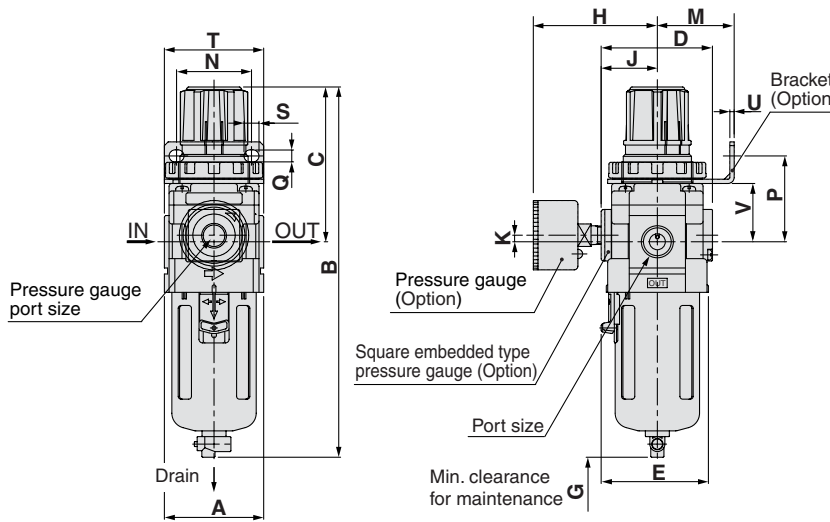

Panel fitting dimension




Plate thickness
AW30: Max. 3.5
AW40: 5

Applicable model	AW10, AW20		AW30, AW40, AW40-06				
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications			 N.O.: Black N.C.: Gray ø10 One-touch fitting			 Width across flats 17	 Barb fitting Applicable tubing: T0604

(mm)

Model	Port size	Standard specifications					Accessory specifications															
		A	B	C	D	E	G	With pressure gauge			Bracket mounting size					Panel mount				With auto-drain		
								H	J	K	M	N	P	Q	S	T	U	V	W	Y	Z	B
AW10	M5 x 0.8	25	108	48	25	28	25	26	—	0	25	28	30	4.5	6.5	40	2	18	18.5	—	—	125
AW20	1/8, 1/4	40	160	73	52	40	40	63	27	5	30	34	44	5.4	15.4	55	2.3	30	28.5	14	6	177
AW30	1/4, 3/8	53	201	86	59	57	55	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7	242
AW40	1/4, 3/8, 1/2	70	239	92	75	73	80	76	38.5	1.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7	278
AW40-06	3/4	75	242	93	75	73	80	76	38.5	1.2	50	54	56	8.5	10.5	70	2.3	37	42.5	21	7	281

Model	Optional specifications			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AW10	—	—	107	—
AW20	—	—	160	—
AW30	209	208	214	234
AW40	247	246	252	272
AW40-06	250	249	255	275

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL

Filter Regulator series AR20 to 40

Made to Order Specifications:

Please contact SMC for detailed dimensions, specifications, and lead times.

1. Special Temperature Environment

Special materials are used in the manufacturing of seals and resin parts to allow them to withstand various temperature conditions in cold or tropical (hot) regions.

Specifications

Part no.	-X430	-X440
Environment	Low temperature	High temperature
Ambient temperature	-30 to 60°C	-5 to 80°C
Fluid temperature	-5 to 60°C (With no freezing)	
Material	Rubber parts	Special NBR
	Main parts	Aluminum die-casted

Applicable Model

Model	AW30	AW40	AW40-06
Port size	1/4, 3/8	1/4, 3/8, 1/2	3/4

How to Order

AW 30 - F 03 BG - 2 N - X430

Filter regulator

Body size: 30 40

Thread type: Nil Rc, N (1) NPT, F (2) G

Port size: Symbol Port size Body size
02 1/4 ● ●
03 3/8 ● ●
04 1/2 — ●
06 3/4 — ●

Option (3):
Symbol Description Applicable model
Nil — —
B With bracket AW30/40
G (4) With round pressure gauge (With limit indicator) AW30/40
H With set nut (For panel mount) AW30/40

Bowl:
Symbol Description Applicable model
Nil (5) Metal bowl AW30/40

Option:
Symbol Description Applicable model
1 (6) 0.02 to 0.2 MPa setting AW30/40
J (7) Drain guide 1/4 AW30/40
N Non-relieving type AW30/40
R Flow direction: Right → Left AW30/40
z (8) Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F) AW30/40

* When more than one specification is required, indicate in ascending alphanumeric order.
 Note 6) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.
 Note 7) Without a valve function.
 Note 8) For thread type NPT. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Note 9) Please consult with SMC for detailed dimensions and available attachments and options.
 Note 10) Comes with type T handle.

2. High Pressure

Strong materials are used in the manufacturing of air filters intended for high pressure operation.

Specifications

Part no.	-X425
Proof pressure	3.0 MPa
Max. operating pressure	2.0 MPa
Set pressure range	0.1 to 1.6 MPa
Ambient and fluid temperature	-5 to 60°C (With no freezing)

Applicable Model

Model	AW20	AW30	AW40	AW40-06
Port size	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2	3/4



How to Order

AW 30 - F 03 BG - 2 N - X425

Filter regulator

Body size: 20 30 40

Thread type: Nil Rc, N (1) NPT, F (2) G

Port size: Symbol Port size Body size
01 1/8 ● — —
02 1/4 — ● ●
03 3/8 — ● ●
04 1/2 — — ●
06 3/4 — — ●

Option (3):
Symbol Description Applicable model
Nil — —
B With bracket AW20/40
G (4) With round pressure gauge (With limit indicator) AW20/40
H With set nut (For panel mount) AW20/40

Bowl:
Symbol Description Applicable model
2 (5) Metal bowl AW20 to 40
8 (5) Metal bowl with level gauge AW30/40

Optional specifications:
Symbol Description Applicable model
J (6) Drain guide 1/4 AW30/40
N Non-relieving type AW20 to 40
R Flow direction: Right → Left AW20 to 40
z (7) Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F) AW20 to 40

* When more than one specification is required, indicate in ascending alphanumeric order.
 Note 6) Without a valve function.
 Note 7) For thread type NPT.
 This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)



Filter Regulator *Series AW20(K) to AW40(K)*

Made to Order Specifications:

Please contact SMC for detailed dimensions, specifications, and lead times.

3. With Digital Pressure Switch

Digital pressure switch (ISE30-□□-□□-□L) is supplied loose for mounting on pressure gauge connection port.

Specifications

Part no. suffix	-X465
Model	ISE30-□□-□□-□L
Set pressure range (MPa)	-0.1 to 1
Set and display resolution (MPa)	0.001
Power supply voltage	12 to 24 VDC ± 10%, Ripple (p-p) 10% or less (With power supply polarity protection)
Power consumption	45 mA or less (70 mA or less for current output)

* Pressure gauge port size: 1/8

Applicable Model

Model	AW20(K)	AW30(K)	AW40(K)	AW40(K)-06
Port size	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2	3/4



F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

How to Order

AW 30 K - F 03 B - 1N - X465 A

Filter regulator

Body size

20	30	40
----	----	----

With back flow mechanism

Nil	—
K	With back flow mechanism

Thread type

Nil	Rc
N (1)	NPT
F (2)	G

Port size

Symbol	Port size	Body size		
		20	30	40
01	1/8	●	●	—
02	1/4	●	●	●
03	3/8	—	●	●
04	1/2	—	—	●
06	3/4	—	—	●

Switch specifications

Symbol	Output specifications
A	NPN output
B	PNP output
C	1 to 5 V output
D	4 to 20 mA output

With digital pressure switch (Series ISE30)⁽⁷⁾

Note 7) Optional parts are not assembled and are supplied loose at the time of shipment.

Option

Symbol	Description	Applicable model
1 (4)	0.02 to 0.2 MPa setting	AW20(K) to 40(K)
2	Metal bowl	AW20(K) to 40(K)
6	Nylon bowl	AW20(K) to 40(K)
8	Metal bowl with level gauge	AW30(K)/40(K)
C	With bowl guard	AW20(K)
J (5)	Drain guide 1/4	AW30(K)/40(K)
N	Non-relieving type	AW20(K) to 40(K)
R	Flow direction: Right → Left	AW20(K) to 40(K)
W	Drain cock with barb fitting: ø6 x ø4 nylon tubing	AW30(K)/40(K)
Z (6)	Name plate and caution plate for bowl in imperial units (PSI, °F)	AW20(K) to 40(K)

* When more than one specification is required, indicate in ascending alphanumeric order.

Note 4) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 5) Without a valve function.

Note 6) For thread type NPT. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Option (3)

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AW20(K) to 40(K)
C	Float type auto-drain (N.C.) (4)	AW20(K) to 40(K)
D	Float type auto-drain (N.O.) (4)	AW30(K)/40(K)
H	With set nut (For panel mount)	AW20(K) to 40(K)

Note 3) Optional parts are not assembled and are supplied loose at the time of shipment (except options C and D).

Note 4) Applicable tubing O.D for auto drain connection should be ø3/8" in case NPT thread port is chosen.

Note 8) Please consult with SMC for detailed dimensions and available attachments and options.

Note 9) Refer to SMC catalog CAT.ES100-42 for detailed specifications and instructions of digital pressure switch.

Filter Regulator with Back Flow Mechanism

Series AW20K/30K/40K

How to Order



AW40K



AW20K

AW 30 K F 03 BE 1N

Filter regulator

Body size

20 30 40

With back flow mechanism



Note) AW10 comes with a back flow mechanism as a standard feature. If the set pressure is not exceeding 0.15 MPa, back flow may not occur. When a back flow mechanism is required with a set pressure of less than 0.15 MPa, please contact SMC.

Thread type

Nil	Rc
N (1)	NPT
F (2)	G



Note 1) Drain guide is NPT 1/4 (applicable to AW30K and 40K), and the exhaust port for auto-drain comes with $\phi 3/8$ " One-touch fitting (applicable to AW30K and AW40K).

Note 2) Drain guide is G 1/4 (applicable to AW30K and AW40K).

Port size

Symbol	Port size	Body size		
		20	30	40
01	1/8	●	—	—
02	1/4	●	●	—
03	3/8	—	●	●
04	1/2	—	—	●
06	3/4	—	—	●

Option

Symbol	Description	Applicable model
1 (4)	0.02 to 0.2 MPa setting	AW20K to 40K
2	Metal bowl	AW20K to 40K
6	Nylon bowl	AW20K to 40K
8	Metal bowl with level gauge	AW30K/40K
C	With bowl guard	AW20K
J (5)	Drain guide 1/4	AW30K/40K
N	Non-relieving type	AW20K to 40K
R	Flow direction: Right → Left	AW20K to 40K
W	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	AW30K/40K
Z (6)	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	AW20K to 40K



* When more than one specification is required, indicate in alphanumeric order.

Note 4) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 5) Without a valve function.

Note 6) For NPT thread type. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Accessory (3)

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AW20K to 40K
C	Float type auto-drain (N.C.) (2)	AW20K to 40K
D	Float type auto-drain (N.O.) (2)	AW30K/40K
E	With square embedded type pressure gauge (With limit indicator)	AW20K to 40K
G	With round pressure gauge (With limit indicator)	AW20K to 40K
H	With set nut (For panel mount)	AW20K to 40K



Note 1) Optional parts are not assembled and are supplied loose at the time of shipment (except options C, D and E).

Note 2) Applicable tubing O.D for auto drain connection should be $\phi 3/8$ " in case NPT thread port is chosen.

Standard Specifications


Model	AW20K	AW30K	AW40K	AW40K-06
Port sizes	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2	3/4
Fluid	Air			
Proof pressure	1.5 MPa			
Maximum operating pressure	1.0 MPa			
Set pressure range (1)	0.05 to 0.85 MPa			
Pressure gauge port size (2)	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/4	Rc, NPT, G 1/4
Relief pressure	Set pressure + 0.05 MPa (at relief flow rate of 0.1/min (ANR))			
Ambient and fluid temperature	-5 to 60°C (With no freezing)			
Nominal filtration rating	5 μ m			
Drain capacity (cm ³)	8	25	45	45
Bowl material	Polycarbonate			
Bowl guard	Option	Standard		
Construction	Relieving type			
Weight (kg)	0.32	0.40	0.72	0.75



Note 1) Set the inlet pressure 0.05 MPa or higher than the set pressure.


Note 2) Pressure gauge connection threads are not required for regulators with a square embedded type pressure gauge (AW20K to AW40K).

JIS Symbol



Circuit Diagram

When the air supply is cut off and releasing the inlet pressure to the atmosphere, the residual pressure release of the outlet side can be ensured for a safety purpose.



Accessory Part No.

Applicable model		AW20K	AW30K	AW40K	AW40K-06			
Accessory								
Bracket assembly (1)		AW20P-270AS	AR30P-270AS	AR40P-270AS	AR40P-270AS			
Set nut		AR20P-260S	AR30P-260S	AR40P-260S	AR40P-260S			
Pressure gauge (2)	1.0 MPa	Round type	G36-10-□01	G36-10-□01	G46-10-□02	G46-10-□02		
		Square embedded type (3)	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS		
	0.2 MPa	Round type	G36-2-□01	G36-2-□01	G46-2-□02	G46-2-□02		
		Square embedded type (3)	GC3-2AS	GC3-2AS	GC3-2AS	GC3-2AS		
Float type auto-drain (4)	N.O.	—	AD38	AD38N(5)	AD48	AD48N(5)	AD48	AD48N(5)
	N.C.	AD27	AD37	AD37N(5)	AD47	AD47N(5)	AD47	AD47N(5)



Note 1) Assembly includes a bracket and set nuts.

Note 2) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT. Please contact SMC regarding the connection thread NPT and pressure gauge supply for PSI unit specifications.

Note 3) Includes one O-ring and 2 mounting screws.

Note 4) Minimum operating pressure: N.O. type-0.1 MPa; N.C. type-0.1 MPa (AD27) and 0.15 MPa (AD37/47). Please contact SMC regarding the specifications for PSI unit and °F.


Note 5) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be $\phi 3/8$ ".

Filter Regulator with Back Flow Mechanism Series AW20K/30K/40K


Flow Characteristics (Representative values)

Condition:
Inlet pressure 0.7 MPa


AW20K Rc 1/4

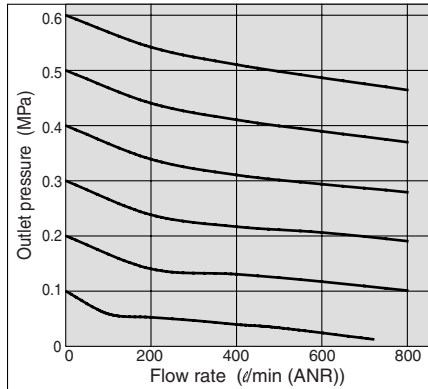


AW30K Rc 3/8

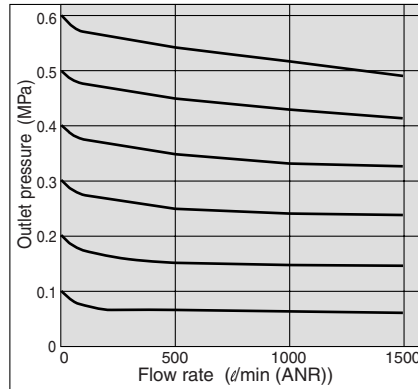

AW40K Rc 1/2

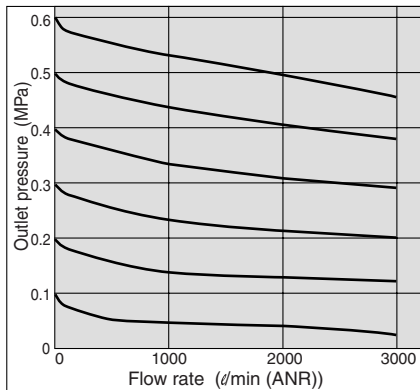


AW40K-06 Rc 3/4

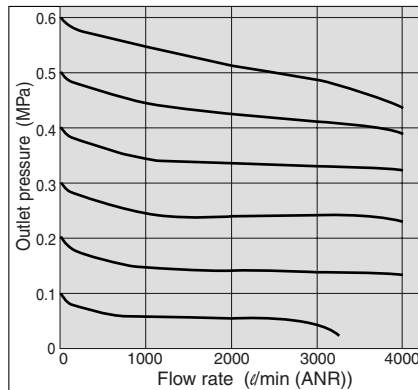


Conditions:
Inlet pressure 0.7 MPa
Outlet pressure 0.2 MPa
Flow rate 20 l/min (ANR)

Pressure Characteristics (Representative values)


AW20K

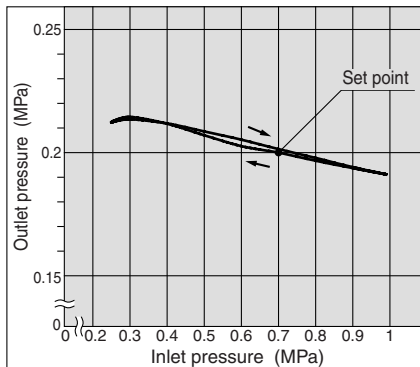


AW40K

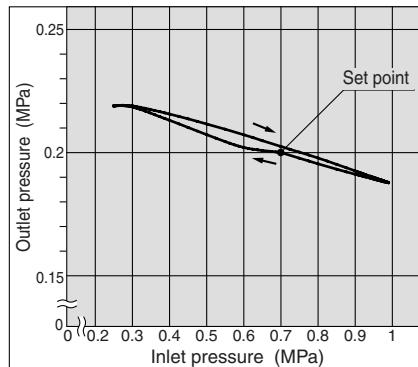

AW30K

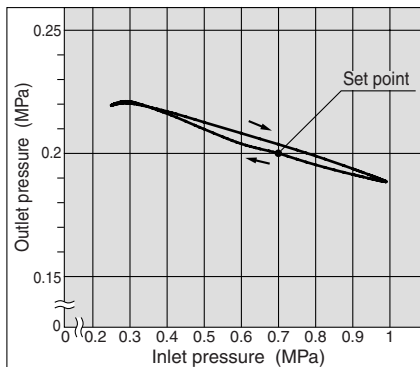

AW40K-06

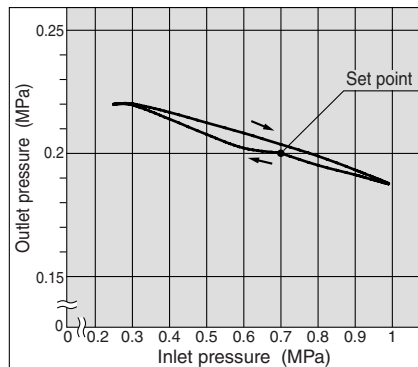

⚠ Precautions

Be sure to read before handling.
Refer to pages 14-21-3 to 14-21-4
for Safety Instructions and Common
Precautions.

Mounting & Adjustment

⚠ Warning

1. Set the regulator while checking the displayed values of the inlet and outlet pressure gauges. Turning the knob excessively can cause damage to the internal parts.
2. The pressure gauge included with regulators for 0.02 to 0.2 MPa setting is for up to 0.2 MPa use. Exceeding 0.2 MPa of pressure can damage the gauge.
3. Do not use tools on the pressure regulator knob as this may cause damage. It must be operated manually.

⚠ Caution

1. Be sure to unlock the knob before adjusting the pressure and lock it after setting the pressure.
Failure to follow this procedure can cause damage to the knob and the outlet pressure may fluctuate.
- Pull the pressure regulator knob to unlock. (You can visually verify this with the "orange mark" that appears in the gap.)
- Push the pressure regulator knob to lock. When the knob is not easily locked, turn it left and right a little and then push it (when the knob is locked, the "orange mark", i.e., the gap will disappear).



2. A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 for details.

Maintenance

⚠ Warning

1. Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first to prevent damage to the element.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1


G

PPA

AL

Series AW20K/30K/40K

Working Principle

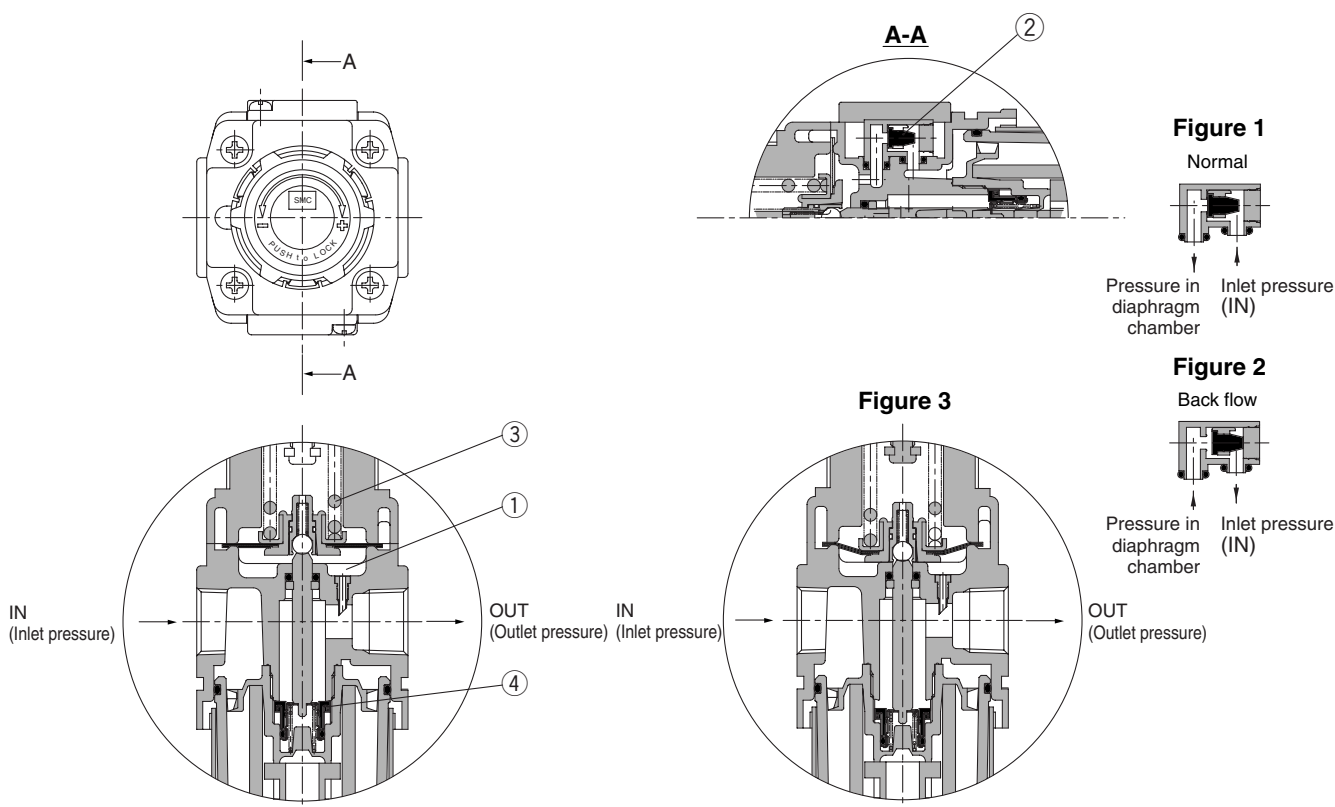


When the inlet pressure (P_1) is higher than the set pressure, the check valve ② closes and operates as a normal regulator (Figure 1).

When the inlet pressure (P_1) is shut off and released, the check valve ②, opens and the pressure in the diaphragm chamber ① is released into the inlet side (Figure 2).

This lowers the pressure in the diaphragm chamber ①, and the force generated by pressure regulator spring ③ lifts the diaphragm. Valve ④ opens through the stem, and the outlet pressure is released to the inlet side (Figure 3).

Construction

AW20K to 40K

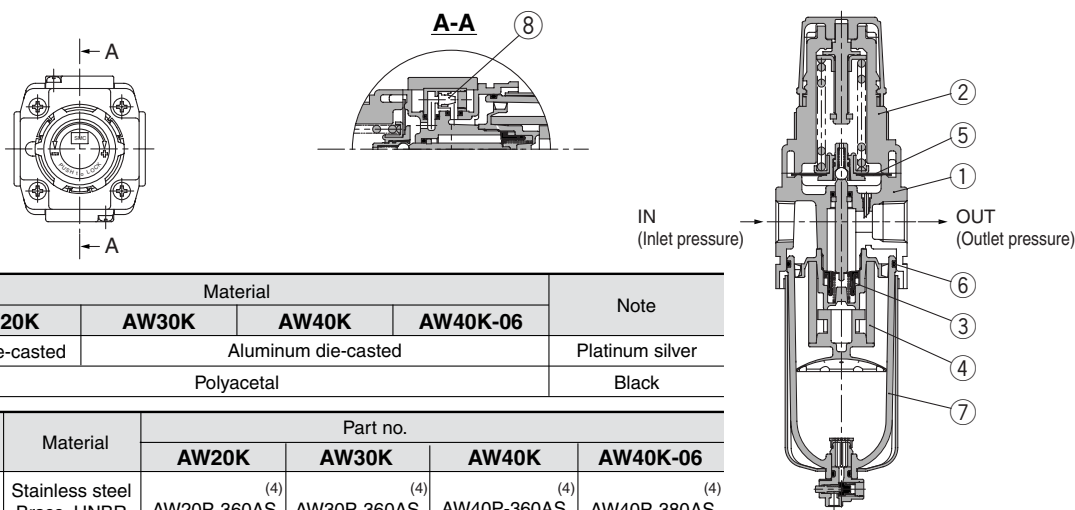

Component Parts

No.	Description	Material				Note
		AW20K	AW30K	AW40K	AW40K-06	
①	Body	Zinc die-casted	Aluminum die-casted			Platinum silver
②	Bonnet	Polyacetal				Black

No.	Description	Material	Part no.			
			AW20K	AW30K	AW40K	AW40K-06
③	Valve assembly	Stainless steel Brass, HNBR	AW20P-360AS ⁽⁴⁾	AW30P-360AS ⁽⁴⁾	AW40P-360AS ⁽⁴⁾	AW40P-380AS ⁽⁴⁾
④	Filter element	Non-woven fabric	AF20P-060S	AF30P-060S	AF40P-060S	AF40P-060S
⑤	Diaphragm assembly	Weatherability NBR	AR20P-150AS	AR30P-150AS	AR40P-150AS	AR40P-150AS
⑥	Bowl O-ring	NBR	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S
⑦	Bowl assembly ⁽¹⁾	PC	C2SF	C3SF ⁽²⁾	C4SF ⁽²⁾	C4SF ⁽²⁾
⑧	Check valve assembly ⁽³⁾	POM, PBT	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS	AR20KP-020AS

Note 1) Including O-ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.

Note 2) Bowl assembly includes a bowl guard (steel band material).

Note 3) Check valve assembly includes check valve cover, check valve body assembly and screws (2 pcs.).

Note 4) Assembly includes valve assembly, valve spring and stem assembly.

Filter Regulator with Back Flow Mechanism Series AW20K/30K/40K

Dimensions

AW20K/30K/40K

Panel fitting dimension





Plate thickness
AW20K, 30K: Max. 3.5
AW40K: Max. 5

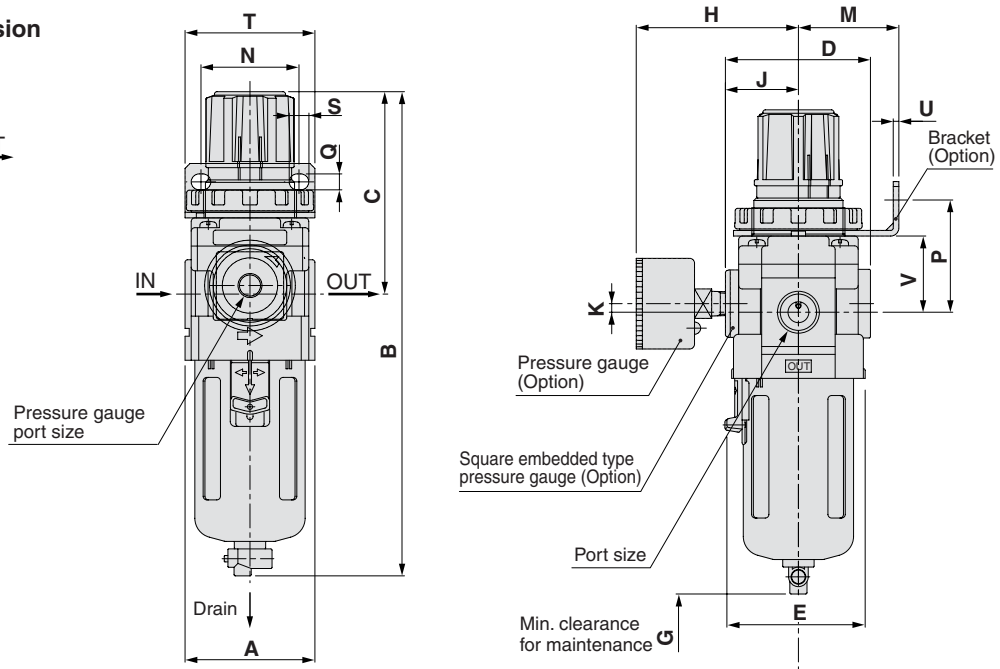

Applicable model	AW20K		AW30K, AW40K, AC40K-06				
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications	 M5 x 0.8		 N.O.: Black N.C.: Gray ø10 One-touch fitting			 Width across flats 17	 Barb fitting Applicable tubing: T0604

(mm)

Model	Port size	Standard specifications				Accessory specifications																
						With pressure gauge				Bracket mounting size								Panel mount				With auto-drain
		A	B	C	D	E	G	H	J	K	M	N	P	Q	S	T	U	V	W	Y	Z	B
AW20K	1/8, 1/4	40	160	73	52	40	40	63	27	5	30	34	44	5.4	15.4	55	2.3	30	28.5	14	6	177
AW30K	1/4, 3/8	53	201	86	59	57	55	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7	242
AW40K	1/4, 3/8, 1/2	70	239	92	75	73	80	76	38.5	1.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7	278
AW40K-06	3/4	75	242	93	75	73	80	76	38.5	1.2	50	54	56	8.5	10.5	70	2.3	37	42.5	21	7	281

Model	Port size	Optional specifications			
		With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
		B	B	B	B
AW20K	1/8, 1/4	—	—	160	—
AW30K	1/4, 3/8	209	208	214	234
AW40K	1/4, 3/8, 1/2	247	246	252	272
AW40K-06	3/4	250	249	255	275

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA

AL

Mist Separator Regulator

AWM20/30/40

Series AWM is a component made up of a regulator and a mist separator that are integrated to provide optimum results in applications such as clean-air blow operations.




AWM20



AWM40

JIS Symbol



Filtration: 0.3 μm

How to Order

AWM 30-F 03 BE-1N

Mist separator regulator

Body size

20 30 40

Thread type

Nil	Rc
N (1)	NPT
F (2)	G



Note 1) Drain guide is NPT 1/4 (applicable to AWM30 and 40), and the exhaust port for auto-drain comes with $\phi 3/8$ " One-touch fitting (applicable to AWM30 and AWM40).

Note 2) Drain guide is G 1/4 (applicable to AWM30 and AWM40).

Port size

Symbol	Port size	Body size		
		20	30	40
01	1/8	●	—	—
02	1/4	●	●	●
03	3/8	—	●	●
04	1/2	—	—	●

Option

Symbol	Description	Applicable model
1 (4)	0.05 to 0.2 MPa setting	AWM20 to 40
2	Metal bowl	AWM20 to 40
6	Nylon bowl	AWM20 to 40
8	Metal bowl with level gauge	AWM30/40
C	With bowl guard	AWM20
J (5)	Drain guide 1/4	AWM30/40
N	Non-relieving	AWM20 to 40
R	Flow direction: Right \rightarrow Left	AWM20 to 40
W	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	AWM30/40
Z (6)	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, $^{\circ}\text{F}$)	AWM20 to 40



* When more than one specification is required, indicate in alphanumeric order.

Note 4) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.

Note 5) Without a valve function.

Note 6) For NPT thread type. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Accessory (3)

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AWM20 to 40
C	Float type auto-drain (N.C.) (2)	AWM20 to 40
D	Float type auto-drain (N.O.) (2)	AWM30/40
E	With square embedded type pressure gauge (With limit indicator)	AWM20 to 40
G	With round pressure gauge (With limit indicator)	AWM20 to 40
H	With set nut (For panel mount)	AWM20 to 40



Note 1) Optional parts are not assembled and are supplied loose at the time of shipment (except options C, D and E).

Note 2) Applicable tubing O.D for auto-drain connection should be $\phi 3/8$ " in case NPT thread port is chosen.

Accessory/Optional Specifications Combinations

⊙: Combination available

■: Combination not available

○: Varies depending on the model

△: Available only with NPT thread

Combination	Symbol	Accessory						Optional specifications									Applicable mist separator regulator		
		B	C	D	E	G	H	1	2	6	8	C	J	N	R	W	Z	AWM20	AWM30 to 40
Accessory	With bracket (With set nut)	⊙	⊙	○	⊙	⊙	■	⊙	⊙	⊙	○	○	○	○	○	○	△	⊙	⊙
	Float type auto-drain (N.C.)	⊙	■	■	⊙	⊙	⊙	⊙	⊙	○	○	■	⊙	⊙	■	■	△	⊙	⊙
	Float type auto-drain (N.O.)	⊙	■	■	⊙	⊙	⊙	⊙	⊙	⊙	⊙	■	⊙	⊙	■	■	△	■	⊙
	Square embedded type pressure gauge	⊙	⊙	⊙	■	■	⊙	⊙	⊙	○	○	○	⊙	⊙	○	○	△	⊙	⊙
	Round pressure gauge	⊙	⊙	○	■	■	⊙	⊙	⊙	○	○	○	⊙	⊙	○	○	△	⊙	⊙
	With set nut (For panel mount)	■	⊙	○	⊙	⊙	■	⊙	⊙	○	○	○	⊙	⊙	○	○	△	⊙	⊙
Optional specifications	0.05 to 0.2 MPa setting	⊙	⊙	○	⊙	⊙	⊙	■	⊙	⊙	○	○	⊙	⊙	○	○	△	⊙	⊙
	Metal bowl	⊙	⊙	○	⊙	⊙	⊙	○	■	■	■	○	⊙	⊙	■	■	△	⊙	⊙
	Nylon bowl	⊙	⊙	○	⊙	⊙	⊙	○	■	■	■	○	⊙	⊙	○	○	△	⊙	⊙
	Metal bowl with level gauge	⊙	⊙	○	⊙	⊙	⊙	○	■	■	■	○	⊙	⊙	■	■	△	■	⊙
	With bowl guard	⊙	⊙	■	⊙	⊙	⊙	○	■	■	■	○	⊙	⊙	■	■	△	⊙	■
	Drain guide 1/4	⊙	■	■	⊙	⊙	⊙	⊙	⊙	⊙	⊙	■	⊙	⊙	■	■	△	■	⊙
	Non-relieving type	⊙	⊙	○	⊙	⊙	⊙	⊙	⊙	○	○	■	⊙	⊙	○	○	△	⊙	⊙
	Flow direction: Right \rightarrow Left	⊙	⊙	○	⊙	⊙	⊙	⊙	⊙	○	○	○	⊙	⊙	○	○	△	⊙	⊙
	Drain cock with barb fitting: $\phi 6 \times \phi 4$ nylon tubing	⊙	■	■	⊙	⊙	⊙	⊙	⊙	⊙	■	■	⊙	⊙	■	■	△	■	⊙
	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, $^{\circ}\text{F}$)	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	■	△	△

Mist Separator Regulator Series AWM20/30/40

Standard Specifications

Model	AWM20	AWM30	AWM40
Port sizes	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2
Fluid	Air		
Proof pressure	1.5 MPa		
Maximum operating pressure	1.0 MPa		
Set pressure range	0.05 to 0.85 MPa		
Pressure gauge port size ⁽¹⁾	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/4
Ambient and fluid temperature	-5 to 60°C (With no freezing)		
Nominal filtration rating	0.3 μm (95% filtered particle size)		
Outlet side oil mist concentration	Max. 1.0 mg/m ³ (ANR) (approx. 0.8 ppm) ^{(2) (3)}		
Rated flow (ℓ/min (ANR)) ⁽⁴⁾	150	330	820
Bowl material	Polycarbonate		
Bowl guard	Option	Standard	
Drain capacity (cm ³)	8	25	45
Construction	Relieving type		
Weight (kg)	0.44	0.59	1.25

Note) When "N" is specified in the end of part number of auto drain, applicable tubing O.D should be ø3/8".

Accessory Part No.

Applicable model		AWM20	AWM30	AWM40		
Accessory						
Bracket assembly ⁽¹⁾		AW20P-270AS	AR30P-270AS	AR40P-270AS		
Set nut		AR20P-260S	AR30P-260S	AR40P-260S		
Pressure gauge ⁽²⁾	1.0 MPa	Round type	G36-10-□01	G36-10-□01	G46-10-□02	
		Square embedded type ⁽³⁾	GC3-10AS	GC3-10AS	GC3-10AS	
	0.2 MPa	Round type	G36-2-□01	G36-2-□01	G46-2-□02	
		Square embedded type ⁽³⁾	GC3-2AS	GC3-2AS	GC3-2AS	
Float type auto-drain ⁽⁴⁾	N.O.	—	AD38	AD38N ^(Note)	AD48	AD48N ^(Note)
	N.C.	AD27	AD37	AD37N ^(Note)	AD47	AD47N ^(Note)

Note) When "N" is specified in the end of part number of auto-drain, applicable tubing O.D should be ø3/8".

Note 1) Pressure gauge connection threads are not required for the regulator with a square embedded type pressure gauge (AWM20 to 40).

Note 2) When the compressor oil mist discharge concentration is 30 mg/Nm³ (ANR).

Note 3) Bowl O-ring and other O-rings are slightly lubricated.

Note 4) When the outlet pressure is 0.5 MPa. (The rated flow varies depending on the set pressure.) Keep the air flow within the rated flow to prevent and outflow of a lubricant to the outlet side.

Note 1) Assembly includes a bracket and set nuts.

Note 2) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT. Please contact SMC regarding the NPT connection thread and pressure gauge supply for PSI unit specifications.

Note 3) Includes one O-ring and 2 mounting screws.

Note 4) Minimum operating pressure: N.O. type-0.1 MPa; N.C. type-0.1 MPa (AD27) and 0.15 MPa (AD37/47). Set the pressure to allow a pressure drop when the fluid flows. Please contact SMC regarding the specifications for PSI unit and °F.

⚠ Precautions

Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Selection

⚠ Warning

- Residual pressure release (outlet pressure release) is not complete by releasing inlet pressure. Please contact SMC regarding residual pressure release.

Air Supply

⚠ Caution

- Install an air filter (Series AF) as a preliminary filter on the inlet side of the mist separator regulator to prevent premature clogging.

Maintenance

⚠ Warning

- Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.

Mounting & Adjustment

⚠ Warning

- Set the regulator while checking the displayed values of the inlet and outlet pressure gauges. Turning the knob excessively can cause damage to the internal parts.
- The pressure gauge included with mist separator regulators for 0.05 to 0.2 MPa setting is for up to 0.2 MPa only. Exceeding 0.2 MPa of pressure can damage the gauge.
- Do not use tools on the pressure regulator knob as this may cause damage. It must be operated manually.

⚠ Caution

- Be sure to unlock the knob before adjusting the pressure and lock it after setting the pressure. Failure to follow this procedure can cause damage to the knob and the outlet pressure may fluctuate.

- Pull the pressure regulator knob to unlock. (You can visually verify this with the "orange mark" that appears in the gap.)
- Push the pressure regulator knob to lock. When the knob is not easily locked, turn it left and right a little and then push it (when the knob is locked, the "orange mark" i.e., the gap, will disappear).



- A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 for details.

F.R.L.

AV

AU

AF

AR

IR

VEX

AMR

ITV

IC

VBA

VE□

VY1

G

PPA


AL

Series AWM20/30/40


Flow Characteristics (Representative values)

Condition: Inlet pressure 0.7 MPa


AWM20 Rc 1/4

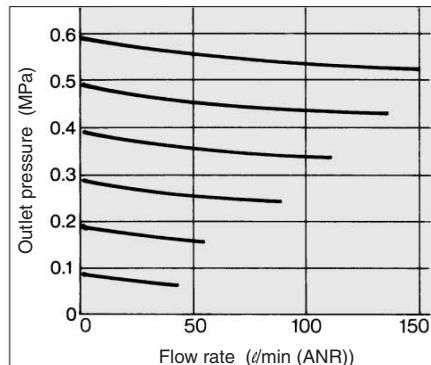

AWM30 Rc 3/8

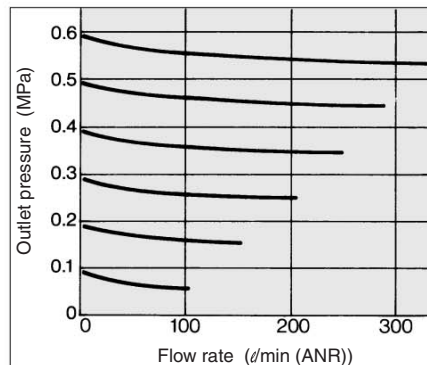


AWM40 Rc 1/2

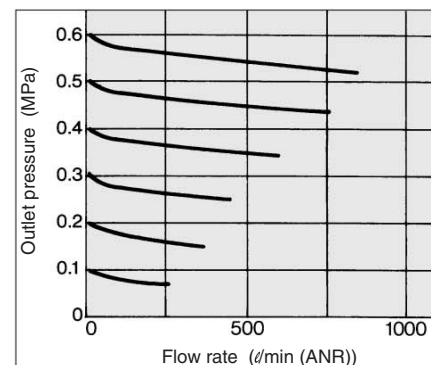


Pressure Characteristics

Conditions: Inlet pressure 0.7 MPa; Outlet pressure 0.2 MPa; Flow rate: 20 l/min (ANR)


AWM20

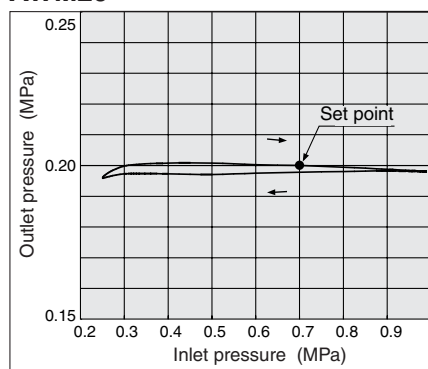

AWM30

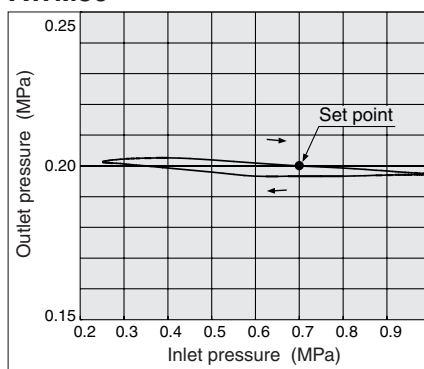


AWM40

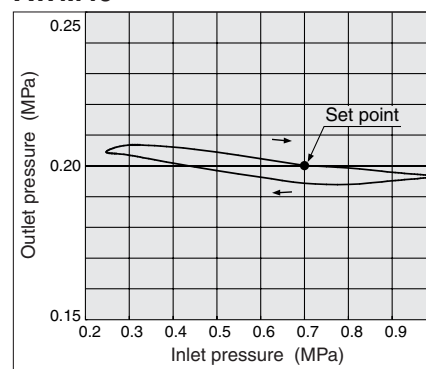


Construction


JIS Symbol



AWM20

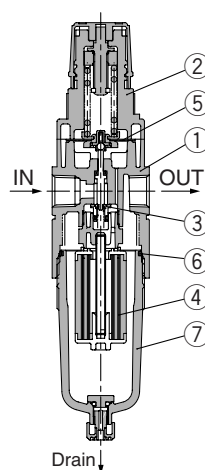

AWM30/40

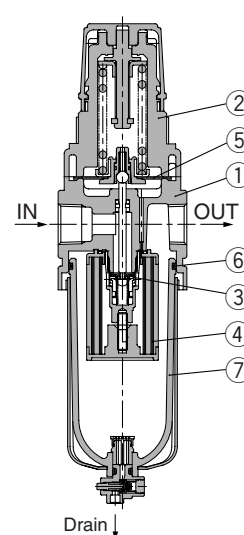

Component Parts

No.	Description	Material			Note
		AWM20	AWM30	AWM40	
①	Body	Zinc die-casted	Aluminum die-casted		Platinum silver
②	Bonnet	Polyacetal			Black

Replacement Parts

No.	Description	Material	Part no.		
			AWM20	AWM30	AWM40
③	Valve assembly	Brass, HNBR	AWM20P-090AS	AWM30P-090AS	AWM40P-090AS
④	Element assembly	—	AFM20P-060AS	AFM30P-060AS	AF40P-060AS
⑤	Diaphragm assembly	Weatherability NBR	AR20P-150AS	AR30P-150AS	AR40P-150AS
⑥	Bowl O-ring	NBR	C2SFP-260S	C3SFP-260S	C4SFP-260S
⑦	Bowl assembly (1)	PC	C2SF	C3SF (2)	C4SF (2)


Note 1) Including O-ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.

Note 2) Bowl assembly for AWM30 and AWM40 comes with a bowl guard (steel band material).


Mist Separator Regulator Series AWM20/30/40

Dimensions

AWM20

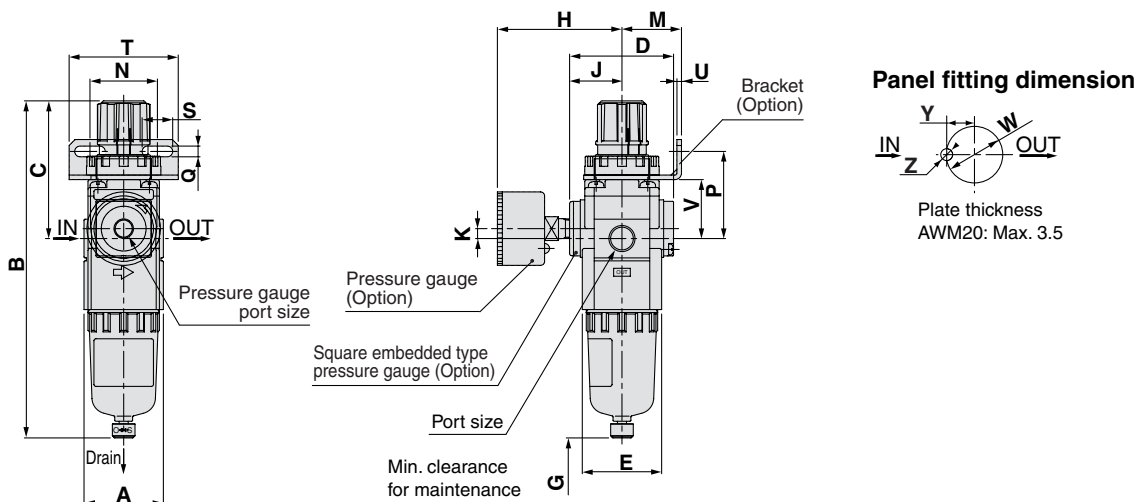

AWM30/40

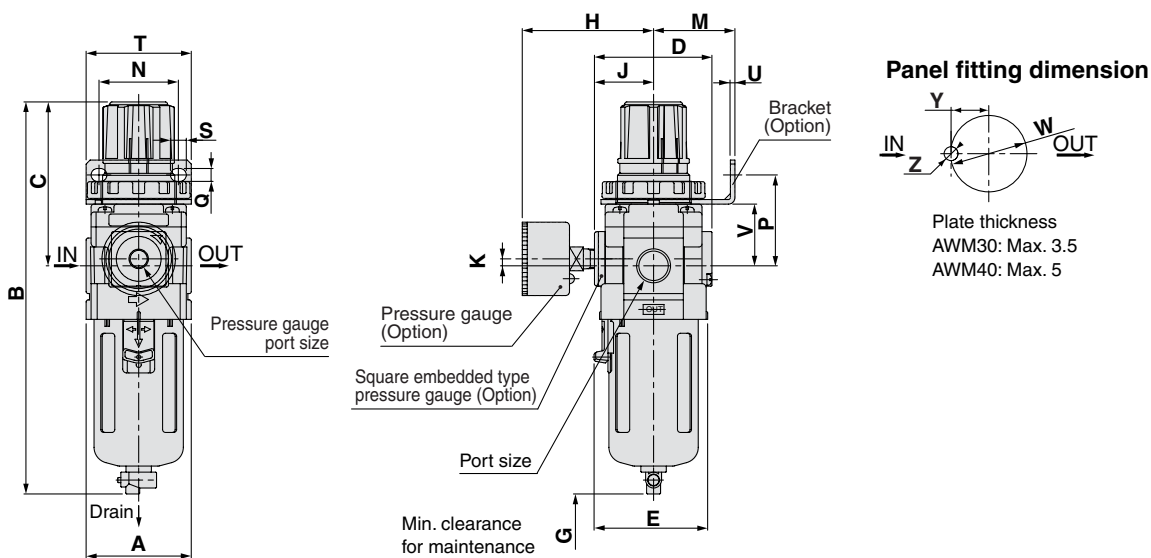

Applicable model	AWM20		AWM30, AWM40				
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications							

(mm)

Model	Port size	Standard specifications					Accessory specifications															
		A	B	C	D	E	With pressure gauge			Bracket mounting size					Panel mount				With auto-drain			
		A	B	C	D	E	G	H	J	K	M	N	P	Q	S	T	U	V	W	Y	Z	B
AWM20	1/8, 1/4	40	173	73	52	40	45	63	27	5	30	34	44	5.4	15.4	55	2.3	30	28.5	14	6	190
AWM30	1/4, 3/8	53	201	86	59	57	50	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7	242
AWM40	1/4, 3/8, 1/2	70	239	92	75	73	70	76	38.5	1.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7	278

Model	Optional specifications			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AWM20	—	—	173	—
AWM30	209	208	214	234
AWM40	247	246	252	272

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL

Micro Mist Separator Regulator

Series AWD20/30/40

Series AWD is a component made up of a regulator and a micro-mist separator that are integrated to provide optimum results in applications such as ultraclean air blow operations.




AWD20



AWD40

JIS Symbol



Filtration: 0.01 μm

How to Order

AWD 30 - F 03 BE - 1N

Micro mist separator regulator

Body size

20 30 40

Thread type

Nil	Rc
N (1)	NPT
F (2)	G

Note 1) Drain guide is for NPT 1/4 (applicable to AWD30 and AWD40), and the exhaust port for auto-drain comes with ø3/8" One-touch fitting (applicable to AWD30 and AWD40).

Note 2) Drain guide is G 1/4 (applicable to AWD30 and AWD40).

Port size

Symbol	Port size	Body size		
		20	30	40
01	1/8	●	—	—
02	1/4	●	●	●
03	3/8	—	●	●
04	2/1	—	—	●

Option

Symbol	Description	Applicable model
1 (4)	0.05 to 0.2 MPa setting	AWD20 to 40
2	Metal bowl	AWD20 to 40
6	Nylon bowl	AWD20 to 40
8	Metal bowl with level gauge	AWD30/40
C	With bowl guard	AWD20
J (5)	Drain guide 1/4	AWD30/40
N	Non-relieving	AWD20 to 40
R	Flow direction: Right → Left	AWD20 to 40
W	Drain cock with barb fitting: ø6 x ø4 nylon tubing	AWD30/40
Z (6)	Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	AWD20 to 40

* When more than one specification is required, indicate in alphanumeric order.
 Note 4) The only difference from the standard specifications is the adjusting spring for the regulator. It does not restrict the setting of 0.2 MPa or more.
 Note 5) Without a valve function.
 Note 6) For NPT thread type. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.)

Accessory (3)

Symbol	Description	Applicable model
Nil	—	—
B	With bracket	AWD20 to 40
C	Float type auto-drain (N.C.) (4)	AWD20 to 40
D	Float type auto-drain (N.O.) (4)	AWD30/40
E	With square embedded type pressure gauge (With limit indicator)	AWD20 to 40
G	With round pressure gauge (With limit indicator)	AWD20 to 40
H	With set nut (For panel mount)	AWD20 to 40

Note 3) Optional parts are not assembled and are supplied loose at the time of shipment (except options C, D and E).
 Note 4) Applicable tubing O.D for auto-drain connection should be ø3/8" in case NPT thread port is chosen.

Accessory/Optional Specification Combinations

⊙: Combination available ⊠: Combination not available
 ○: Varies depending on the model △: Available only with NPT thread

Combination	Symbol	Accessory						Optional specifications							Applicable micro mist separator regulator			
		B	C	D	E	G	H	1	2	6	8	C	J	N	R	W	Z	AWD20
Accessory	With bracket (With set nut)	⊠	⊙	○	⊙	⊙	⊠	⊙	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙
	Float type auto-drain (N.C.)	⊙	⊠	⊠	⊙	⊙	⊙	⊙	⊙	○	⊠	⊙	⊙	⊙	⊠	⊙	⊙	
	Float type auto-drain (N.O.)	⊙	⊠	⊠	⊙	⊙	⊙	⊙	⊙	○	⊠	⊙	⊙	⊙	⊠	⊙	⊙	
	Square embedded type pressure gauge	⊙	⊙	⊙	⊠	⊠	⊙	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙	
	Round pressure gauge	⊙	⊙	○	⊠	⊠	⊙	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙	
	Panel mount (With set nut)	H	⊙	○	⊙	⊙	⊠	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙	
Optional specifications	0.05 to 0.2 MPa setting	-1	⊙	⊙	○	⊙	⊙	⊠	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙
	Metal bowl	-2	⊙	⊙	○	⊙	⊙	⊙	⊠	⊠	⊠	⊙	⊙	⊙	⊠	⊙	⊙	
	Nylon bowl	-6	⊙	⊙	○	⊙	⊙	⊙	⊠	⊠	⊠	○	⊙	⊙	⊠	⊙	⊙	
	Metal bowl with level gauge	-8	⊙	⊙	○	⊙	⊙	⊙	⊠	⊠	⊠	○	⊙	⊙	⊠	⊙	⊙	
	With bowl guard	-C	⊙	⊙	⊠	⊙	⊙	⊙	⊙	○	⊙	⊙	⊙	⊙	⊠	⊙	⊙	
	Drain guide 1/4	-J	⊙	⊠	⊠	⊙	⊙	⊙	⊙	○	○	⊙	⊙	⊙	△	⊙	⊙	
	Non-relieving type	-N	⊙	⊙	○	⊙	⊙	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙	
	Flow direction: Right → Left	-R	⊙	⊙	○	⊙	⊙	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙	
Drain cock with barb fitting: ø6 x ø4 nylon tubing	-W	⊙	⊠	⊠	⊙	⊙	⊙	⊙	○	○	⊙	⊙	○	△	⊙	⊙		
Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)	-Z	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	△	

Micro Mist Separator Regulator Series AWD20/30/40

Standard Specifications

Model	AWD20	AWD30	AWD40
Port size	1/8, 1/4	1/4, 3/8	1/4, 3/8, 1/2
Fluid	Air		
Proof pressure	1.5 MPa		
Maximum operating pressure	1.0 MPa		
Set pressure range	0.05 to 0.85 MPa		
Pressure gauge port size ⁽¹⁾	Rc, NPT, G 1/8	Rc, NPT, G 1/8	Rc, NPT, G 1/4
Ambient and fluid temperature	-5 to 60°C (With no freezing)		
Nominal filtration rating	0.01µm (95% filtered particle size)		
Outlet side oil mist concentration	Max. 0.1 mg/m ³ (ANR) ⁽²⁾⁽³⁾ (Before saturated with hydraulic fluid: 0.01 mg/m ³ (ANR) or less, approx. 0.008 ppm)		
Rated flow (l/min (ANR)) ⁽⁴⁾	90	180	450
Bowl material	Polycarbonate		
Bowl guard	Option	Standard	
Drain capacity (cm ³)	8	25	45
Construction	Relieving type		
Weight (kg)	0.44	0.59	1.25

Note 1) Pressure gauge connection threads are not required for the regulator with a square embedded type pressure gauge (AWD20 to 40).

Note 2) When the compressor oil mist discharge concentration is 30 mg/m³ (ANR).

Note 3) Bowl O-ring and other O-rings are slightly lubricated.

Note 4) When the outlet pressure is 0.5 MPa. (The rated flow varies depending on the set pressure.) Keep the air flow within the rated flow to prevent an outflow of lubricant to the outlet side.

Accessory part no.

Accessory		Applicable model	AWD20	AWD30	AWD40
Bracket assembly ⁽¹⁾			AW20P-270AS	AR30P-270AS	AR40P-270AS
Set nut			AR20P-260S	AR30P-260S	AR40P-260S
Pressure gauge ⁽²⁾	1.0 MPa	Round	G36-10-□01	G36-10-□01	G46-10-□02
		Square embedded type ⁽³⁾	GC3-10AS	GC3-10AS	GC3-10AS
	0.2 MPa	Round	G36-2-□01	G36-2-□01	G46-2-□02
		Square embedded type ⁽³⁾	GC3-2AS	GC3-2AS	GC3-2AS
Float type auto-drain ⁽⁴⁾	N.O.	—	AD38	AD38N ^(Note)	AD48
	N.C.	AD27	AD37	AD37N ^(Note)	AD47

Note) When "N" is specified in the end of part number of auto drain, applicable tubing O.D should be ø3/8".

Note 1) Assembly includes a bracket and set nuts.

Note 2) □ in part numbers for a round pressure gauge indicates a type of connection thread. No indication is necessary for R; however, indicate N for NPT. Please contact SMC regarding the NPT connection thread and pressure gauge supply for PSI unit specifications.

Note 3) Includes one O-ring and 2 mounting screws.

Note 4) Minimum operating pressure: N.O. type-0.1 MPa; N.C. type-0.1 MPa (AD27) and 0.15 MPa (AD37/47). Set the pressure to allow a pressure drop when the fluid flows. Please contact SMC regarding the specifications for PSI unit and °F.

⚠ Precautions

Be sure to read before handling. Refer to pages 14-21-3 to 14-21-4 for Safety Instructions and Common Precautions.

Selection

⚠ Warning

- Residual pressure release (outlet pressure release) is not complete by releasing inlet pressure. Please contact SMC regarding the residual pressure release.

Air Supply

⚠ Caution

- Install an air filter (Series AFM) as a preliminary filter on the inlet side of the micro-mist separator to prevent premature clogging.

Maintenance

⚠ Warning

- Replace the element every 2 years or when the pressure drop becomes 0.1 MPa, whichever comes first, to prevent damage to the element.

Mounting & Adjustment

⚠ Warning

- Set the regulator while checking the displayed values of the inlet and outlet pressure gauges. Turning the knob excessively can cause damage to the internal parts.
- The pressure gauge included with micro mist separator regulator for 0.05 to 0.2 MPa setting is for up to 0.2 MPa only. Exceeding 0.2 MPa of pressure can damage the gauge.
- Do not use tools on the pressure regulator knob as this may cause damage. It must be operated manually.

⚠ Caution

- Be sure to unlock the knob before adjusting the pressure and lock it after setting the pressure.
Failure to follow this procedure can cause damage to the knob and the outlet pressure may fluctuate.

- Pull the pressure regulator knob to unlock. (You can visually verify this with the "orange mark" that appears in the gap.)
- Push the pressure regulator knob to lock. When the knob is not easily locked, turn it left and right a little and then push it (when the knob is locked, the "orange mark" will disappear).






- A knob cover is available to prevent careless operation of the knob. Refer to page 14-2-6 details.

Series AWD20/30/40




Flow Characteristics (Representative value)

Condition: Inlet pressure 0.7 MPa

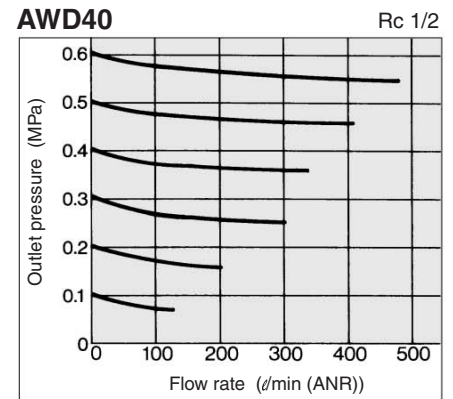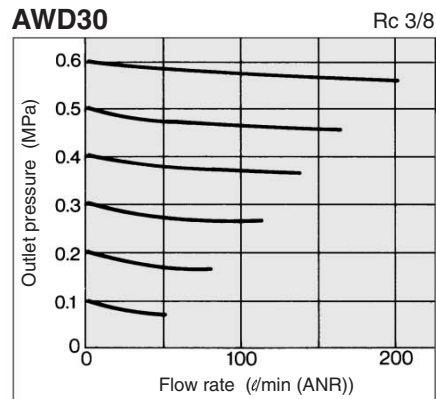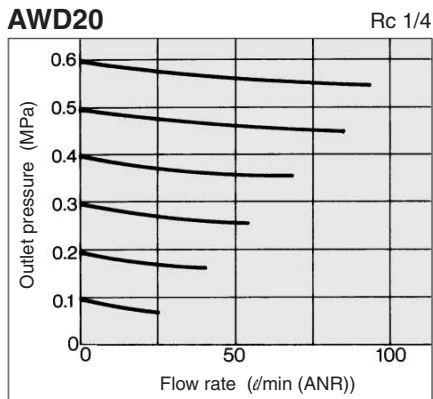


Pressure Characteristics (Representative value)

Conditions: Inlet pressure 0.7 MPa; Outlet pressure 0.2 MPa; Flow rate: 20 l/min (ANR)

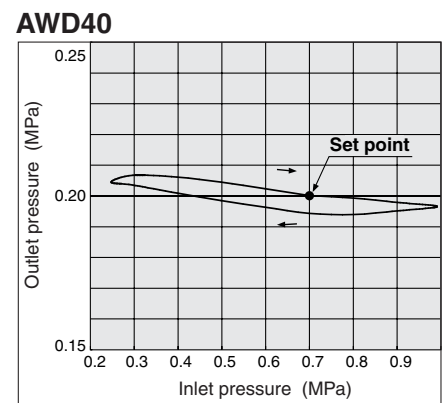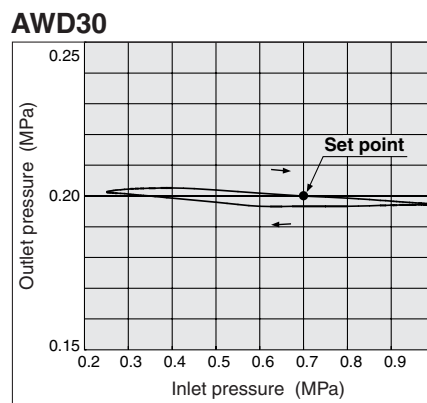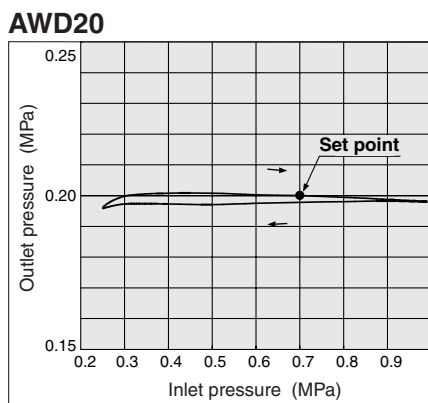


Construction


JIS Symbol



AWD20

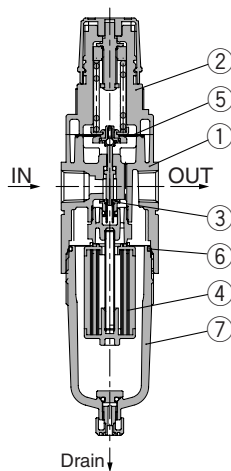

AWD30/40

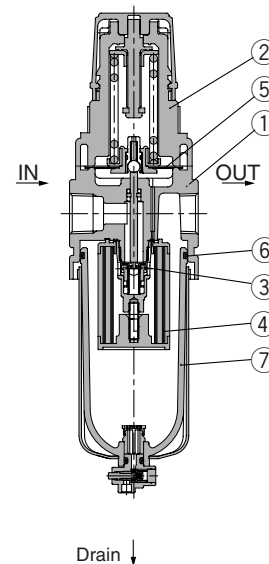

Component Parts

No.	Description	Material			Note
		AWD20	AWD30	AWD40	
①	Body	Zinc die-casted	Aluminum die-casted		Platinum silver
②	Bonnet	Polyacetal			Black

Replacement Parts

No.	Description	Material	Part no.		
			AWD20	AWD30	AWD40
③	Valve assembly	Brass, HNBR	AWM20P-090AS	AWM30P-090AS	AWM40P-090AS
④	Element assembly	—	AFD20P-060AS	AFD30P-060AS	AFD40P-060AS
⑤	Diaphragm assembly	Weatherability NBR	AR20P-150AS	AR30P-150AS	AR40P-150AS
⑥	Bowl O-ring	NBR	C2SFP-260S	C3SFP-260S	C4SFP-260S
⑦	Bowl assembly (1)	PC	C2SF	C3SF (2)	C4SF (2)


Note 1) Including O-ring. Please contact SMC regarding the bowl assembly supply for PSI and °F unit specifications.

Note 2) Bowl assembly for AWD30 and AWD40 comes with a bowl guard (steel band material).


Micro Mist Separator Regulator Series AWD20/30/40

Dimensions

AWD20

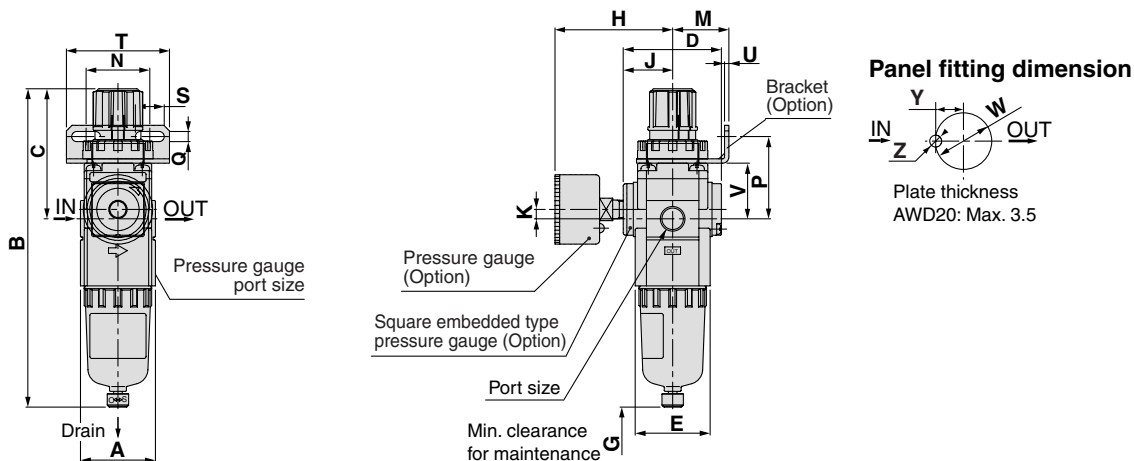

AWD30/40

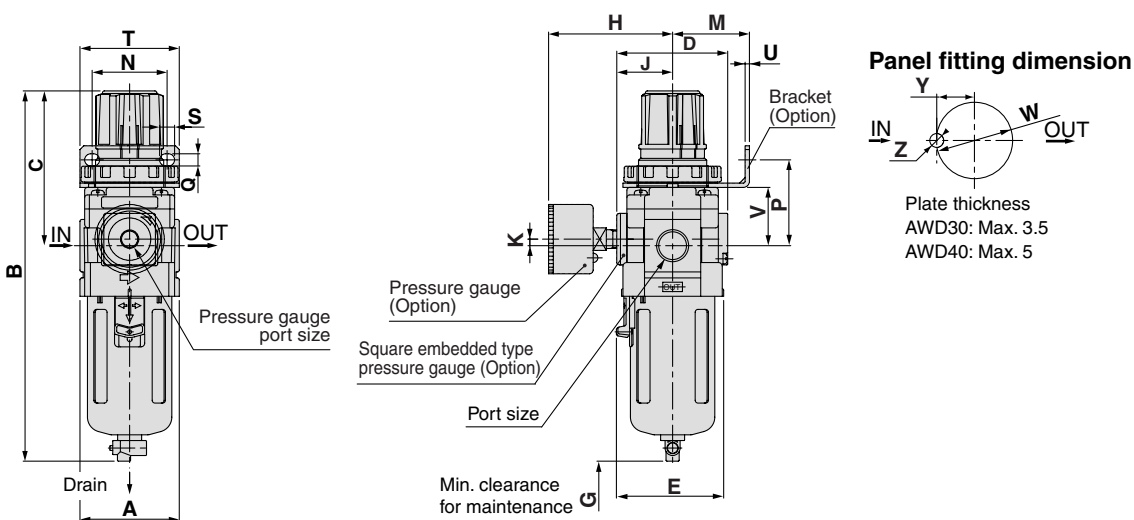

Applicable model	AFD20		AWD30, AWD40				
	With auto-drain (N.C.)	Metal bowl	With auto-drain (N.O./N.C.)	Metal bowl	Metal bowl with level gauge	With drain guide	Drain cock with barb fitting
Optional specifications	M5 x 0.8		N.O.: Black N.C.: Gray ø10 One-touch fitting			1/4 Width across flats 17	Barb fitting Applicable tubing: T0604

(mm)

Model	Port size	Standard specifications						Accessory specifications														
		A	B	C	D	E	G	With pressure gauge			Bracket mounting size						Panel mount				With auto-drain	
								H	J	K	M	N	P	Q	S	T	U	V	W	Y		Z
AWD20	1/8, 1/4	40	173	73	52	40	45	63	27	5	30	34	44	5.4	15.4	55	2.3	30	28.5	14	6	190
AWD30	1/4, 3/8	53	201	86	59	57	50	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7	242
AWD40	1/4, 3/8, 1/2	70	239	92	75	73	70	76	38.5	1.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7	278

Model	Optional specifications			
	With barb fitting	With drain guide	Metal bowl	Metal bowl with level gauge
	B	B	B	B
AWD20	—	—	173	—
AWD30	209	208	214	234
AWD40	247	246	252	272

- F.R.L.
- AV
- AU
- AF
- AR
- IR
- VEX
- AMR
- ITV
- IC
- VBA
- VE□
- VY1
- G
- PPA
- AL